


Free Space 5.15 push to open complete set - for applications without handle



- > For one-piece flaps without handle made of wood or with aluminium frame, from frame width 45 mm
- > Area of application: For heavy stay flap applications up to 15 kg (with cabinet height 600 mm) Push-to-open
- > Opening angle: 90° or 107°
- > Installation: Fitting for screw fixing with pre-mounted Euro screw, front panel fixing without tools, for sliding onto pre-mounted fixing screws
- > Adjustment facility: Height, side, tilting angle, holding power
- > Supplied with:
 - 1 stay flap fitting set (1 piece each left/right)
 - 2 front fixing brackets with pre-mounted screws
 - 1 Free push catch
 - 1 set of installation instructions with paper drilling template for side panel
- > Material: Plastic housing, steel front fixing bracket and support lever
- > Finish/colour: Nickel plated or black (with black housing) front fixing bracket and support lever. White, light grey, anthracite or black housing
- > Order qty: 1 kit

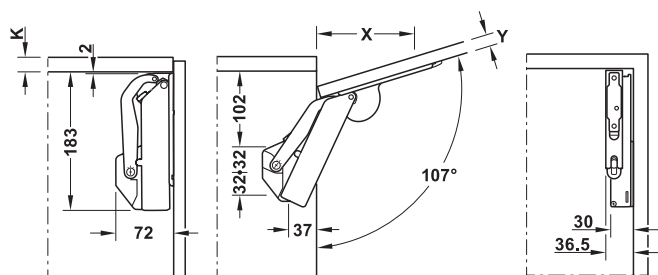

Front panel thickness Y mm	16	18	19	22	24	26	28
Distance X mm (with cabinet top panel thickness K=16 mm)	117	110	107	96	90	83	76



Please order suitable screw set 372.27.600 for aluminium frame front panels from frame width 45 mm. Shown on page 9.224



- > The choice of the stay flap fitting for front panels with handle depends on the cabinet height and flap weight including handle
- > Model selection see sample measurements table. We recommend to use the stronger fitting model when in doubt




Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

Sample measurements table for selecting the right model based on cabinet height and flap weight

Model Häfele Free Space 5.15 push	F pto	G pto	H pto
Cabinet height mm	Flap weight kg		
350	8.7-12.3	11.7-18.9	18.0-25.7
375	8.1-11.5	10.9-17.6	16.8-24.0
400	7.6-10.8	10.2-16.5	15.8-22.5
425	7.2-10.1	9.6-15.5	14.8-21.2
450	6.8-9.6	9.1-14.7	14.0-20.0
475	6.4-9.1	8.6-13.9	13.3-18.9
500	6.1-8.6	8.2-13.2	12.6-18.0
525	5.8-8.2	7.8-12.6	12.0-17.1
550	5.5-7.8	7.4-12.0	11.5-16.4
575	5.3-7.5	7.1-11.5	11.0-15.7
600	5.1-7.2	6.8-11.0	10.5-15.0
625	4.9-6.9	6.5-10.6	10.1-14.4
650	4.7-6.6	6.3-10.2	9.7-13.8

Push catch installation

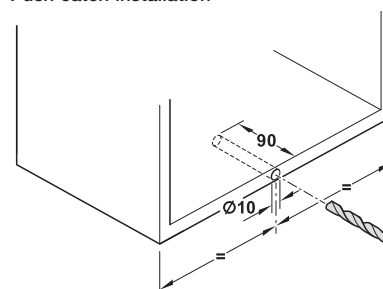

Model	White	Light grey	Anthracite	Black
F pto	372.27.730	372.27.530	372.27.330	372.27.430
G pto	372.27.731	372.27.531	372.27.331	372.27.431
H pto	372.27.732	372.27.532	372.27.332	372.27.432