


To avoid injuries the hinge comes apart when fingers get trapped unintentionally in the gap of the flap

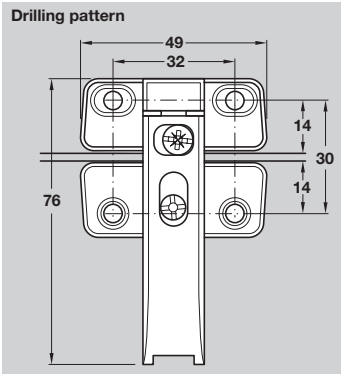

Drilling jig 372.61.798 for Free Fold
connecting hinges shown on page **9.223**

- > For use with Free Fold fitting
- > For wooden flaps and flaps with aluminium frame, from frame width 20 mm
- > 3-way adjustment: ± 2 mm side adjustment, -1 to +2 mm gap adjustment, ± 1.5 mm depth adjustment
- > With finger protection function
- > Zinc alloy
- > Order fixing screws separately
- > Order qty: 1 pc

For door width	No. of hinges
Upto 600 mm	2
Between 600-800 mm	2/3
Over 800 mm	3



Use 3 hinges for flap widths 900 mm



Finish	Chipboard screws	Euro screws
Nickel-plated	372.64.796	372.64.797

- > For use with Free Fold flap fittings
- > Restricts the opening angle to 90° for low level applications
- > Plastic
- > Consists of 2 restraints (2 required per flap fitting set)
- > Order qty: 1 pc



Finish	Cat. No.
Grey RAL 7040	372.37.060

- > Zinc alloy
- > Order qty: 1 pc

B = A2 - 5.5
B min. = 7.0
B max. = 13.5

Power adjustment of fitting



Finish	Cat. No.
Nickel-plated	372.37.044