

FREE UP LIFT-UP FRONT FITTING

For one-piece laps made from wood, glass or with aluminium frame.

9

Furniture Hinges and Flap Fittings: Flap Fittings and Stays

- > Ideal for cabinets with front panels above
- > Hardly any space required in the room towards the front
- > Creates practical "niches" in tall cabinets, e.g. for electrical equipment
- > Cabinet contents are extremely easy to access
- > Excellent side stability
- > Minimum opening resistance, multi-position stop function and integrated soft opening and soft closing mechanisms for extremely pleasant operating feeling
- > Rational and quick installation thanks to pins, pre-mounted Euro screws and quick fixing system of the front panel and cross bar
- > Stylish and compact design




Highest operating convenience




- > Minimum opening resistance
- > Flap locks in any position (multi-position stop)
- > Smooth, soft closing movement
- > Soft opening and soft closing mechanisms


Maximum flexibility

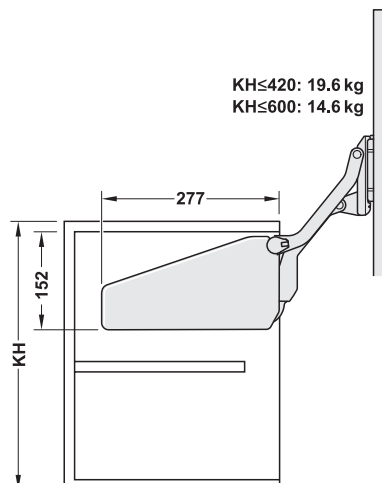

Side space requirement

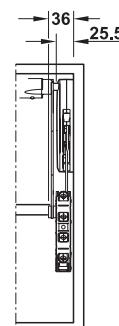


Quick fixing system

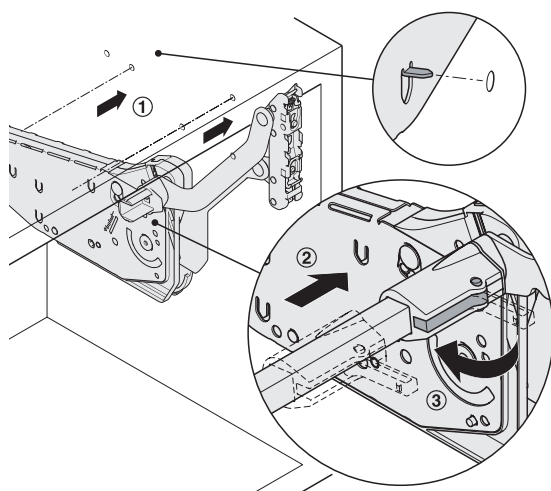

1. Plug fit fitting onto pre-drilled side panel, tighten Euro screws that were pre-mounted in the factory
- 2.-3. Insert cross bar and secure with the sleeves
4. Surface mount front panel and engage

Power adjustment of fitting

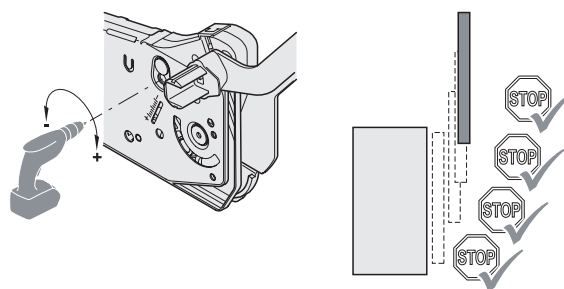

Insert PZ2 drive all the way into the opening.
Set the cordless screwdriver on low speed torque. Ensure the same power adjustment on both sides (left and right).

Free Up parallel lift up front fitting

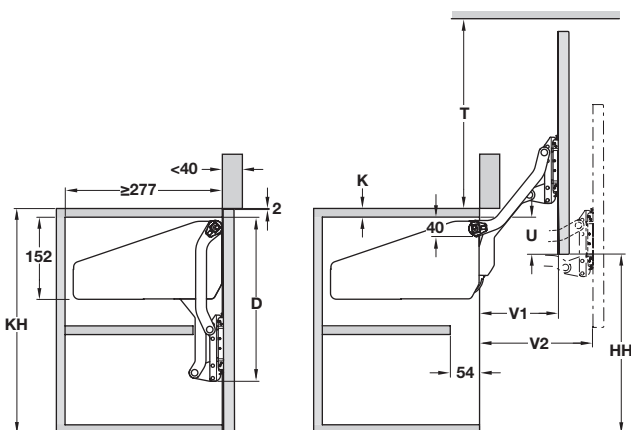


Photo shows white cover cap - grey cover cap is included

- > For one-piece flaps made from wood, glass or with aluminium frame
- > Integrated soft close
- > Set includes:
 - > 1x Parallel lift up front fitting
 - > 2x Cover caps
 - > 2x Clip-on brackets for wooded flaps or flaps with wide aluminium frame
- > Installation instructions
- > Height and side adjustment ± 1.5 mm, tilting angle $\pm 1.5^\circ$, holding power and opening angle adjustment facility
- > Requires 1x cross rail, see below
- > Fitting: nickel-pleated steel, cover cap: grey plastic
- > Order fixing screws separately
- > Order qty: 1 set



White or anthracite cover cap, to replace grey cover cap included, is available to order separately; see page 9.221



Installation dimensions (mm)

KH	D	U	HH	T	V1	V2
320-360	274.5	KH - HH - K	278	281	128	177
345-420	302.5	KH - HH - K	328	333	146	205
380-500	337.5	KH - HH - K	390	393	168	240
430-600	382.5	KH - HH - K	470	473	196	284



Flap weight	Grey
Cabinet height 320-360 mm, min. flap height 280 mm	
3.0-5.7 kg	372.33.500
4.8-9.3 kg	372.33.501
Cabinet height 345-420 mm, min. flap height 308 mm	
2.4-4.8 kg	372.33.510
7.4-14.0 kg	372.33.512
11.0-19.6 kg	372.33.513
Cabinet height 380-500 mm, min. flap height 343 mm	
2.0-3.8 kg	372.33.520
3.4-6.7 kg	372.33.521
6.3-11.8 kg	372.33.522
9.3-17.4 kg	372.33.523
Cabinet height 430-600 mm, min. flap height 388 mm	
1.6-3.3 kg	372.33.530
2.6-5.5 kg	372.33.531
5.0-9.7 kg	372.33.532
7.4-14.6 kg	372.33.533

YOU ALSO NEED:



CROSS RAIL
shown below




ALTERNATIVE MOUNTING BRACKETS
Page 9.220

OPTIONAL ACCESSORIES
Page 9.221-223

Cross rail



Installation

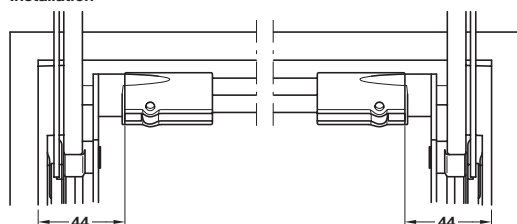

Cutting dimension = internal cabinet width - 88 mm
(If used with Electric version = internal cabinet width - 113 mm)

- > For use with all Free family flap fittings
- > For connecting both fitting components
- > Side panel thickness W: 16/19 mm
- > Silver coloured anodised aluminium
- > Order qty: 1 pc



Cabinet width	Length	Cat. No.
600 mm	474 mm	372.33.692
900 mm	774 mm	372.33.694
1200 mm	1074 mm	372.33.696
1800 mm	1674 mm	372.33.698