




Different applications possible when using Maxi flap fittings are shown from page **9.236**




See page **9.241** for soft-closing mechanism, push magnetic door catch and other accessories to suit the Maxi lid stay

Maxi lid stay


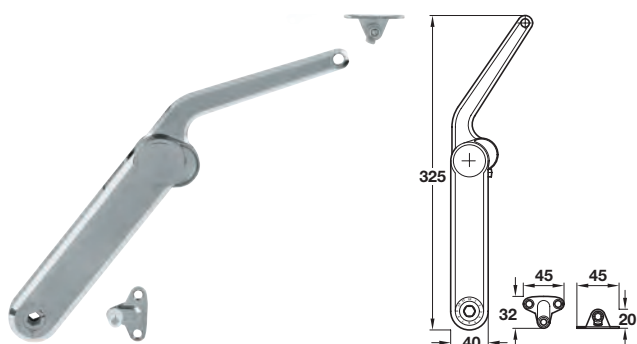


- > Opening angles: 75°, 90° or 110°
- > With power assisted opening
- > Unhanded design
- > Clip-mounting on pre-mounted screw fixing brackets included, no tools required
- > Installation instructions included
- > Height ± 2 mm, side $+3/-1$ mm, tilt ± 1.5 mm and holding power adjustment with SW10 hex key facility
- > Nickel-plated zinc alloy lid stay, nickel-plated steel screw-fixing brackets, plastic hinge cover and adjusting screw
- > Order fixing screws separately
- > Order qty: 1 pc




Wooden lid flap



Lid flap with aluminium frame



No tools required for attaching the lid stay - stay clip mounts onto



Screw-on bracket for fixing to the carcass side panel; Angled foot for fixing flaps made of wood



Model	Distance from edge	Nickel-plated
Wooden flaps and flaps with aluminium frame, from frame width 45 mm		
A	37 mm	373.69.512
B	37 mm	373.69.412
C	37 mm	373.69.712
D	37 mm	373.69.312