


Soft-closing mechanism



- > For edge distance 37 mm
- > Zinc alloy
- > Order qty: 1 pc




Finish	Cat. No.
Nickel-plated	373.69.799


Push magnetic door catch, for concealed fixing



- > For use with Maxi Touch 'push-to-open' or 'touch opening' application' shown on pages 210-211
- > With magnet for holding in closed position
- > For mounting in drilled hole in cabinet base (shown as 3 on image left), or with adapter housing shown below
- > Plastic
- > Order qty: 1 pc



With counterplate for knocking in



With counterplate for glue fixing





Additional catch (without eject pin) and counterplate, for door fronts over 1200, glue fixing




Use additional catch for door fronts wider than 1200 mm or when using 3 or more push hinges (shown as 4 on image left)

Item	Cat. No.
Catch with counterplate for knocking in	356.06.460
Catch with counterplate for glue fixing	356.06.461
Additional catch (without eject pin)	356.06.471

Cruciform adapter housing for screw fixing



Without positioning aid




With positioning aid

- > For screw fixing to cabinet top or base
- > Beige plastic
- > Order qty: 1 pc

	Cat. No.
Without positioning aid	356.06.420

SW10 hex key

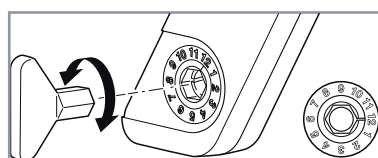


- > For use with Häfele Maxi flap fittings
- > For load bearing capacity adjustment
- > Plastic
- > Order qty: 1 pc

Finish	Cat. No.
Grey	235.79.301

Counterplate for knocking in



- > Steel
- > Order qty: 1 pc



Finish	Cat. No.
Galvanized	246.08.911