


HÄFELE METALLA 310 155° HINGE SETS

For cabinets with internal pull outs or extending trays.

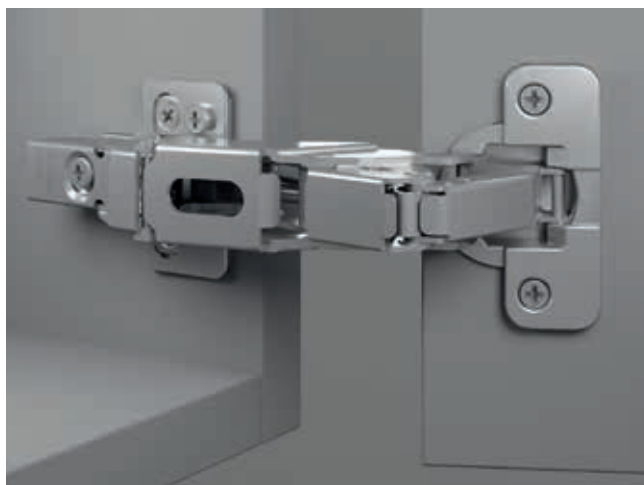

Full overlay mounting with mounting plate

- > For cabinet with internal pull outs or extending trays
- > Opening angle 155°, Ø 35 mm cup
- > Screw fixing cup
- > Zero protrusion
- > Installation: Door to cabinet with quick fixing system
- > For door thickness 14-24 mm see table below
- > With integrated soft close
- > With automatic closing spring
- > Adjustment facility: Side adjustment ± 2.5 mm, height adjustment ± 2 mm (via mounting plate), depth adjustment ± 2 mm
- > Black nickel plated or nickel plated steel cup and hinge arm
- > Set consists of:
 - 2x hinges
 - 2x mounting plates, with pre-mounted Euro screws, height 0 mm
 - 4x wood screws
- > Order qty: 1 set




Minimum gap

Door thickness	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
15	0.5	1.2	2.0	3.0	3.9
16	0.5	1.3	2.2	3.2	4.2
17	0.5	1.4	2.3	3.4	4.3
18	0.7	1.5	2.5	3.5	4.6
19	0.8	1.7	2.8	3.7	5.0
20	1.0	1.9	2.9	3.8	5.1
21	1.2	2.2	3.0	4.0	5.2
22	1.3	2.3	3.3	4.2	5.3
23	1.5	2.4	3.5	4.5	5.5
24	1.7	2.7	3.7	4.8	5.6

Minimum gap F

Rounding off the edge of door reduces the given values

Drilling pattern for cup fixing

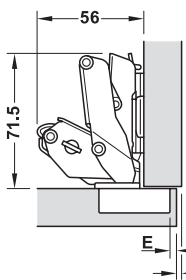

The values (distance to cup) in the table apply to centre position of side adjusting screw

Häfele Metalla 310 155° concealed hinge, full overlay mounting plate set



Nickel plated finish



Black nickel plated finish

Door overlay mm							
14	15	16	17	18	19	20	21
			3	4	5	6	7
		3	4	5	6	7	
3	4	5	6	7			
Distance to cup E mm						Mounting plate distance mm	
							0
							2
							4



Quick fixing	
Black nickel plated	Nickel plated
45/9.5 drilling pattern for cup fixing	
With soft close	483.02.488
	483.02.486