



LID STAYS

Lid stay




- > Opening angle 90°
- > With quick mounting angled foot
- > Unhanded design
- > For screw fixing, at angular bracket for plug fitting (quick fixing system)
- > Nickel-plated steel lid stay with plastic housing
- > Order qty: 1 pc

Drilling pattern

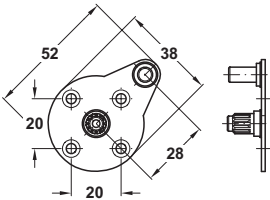

Installation

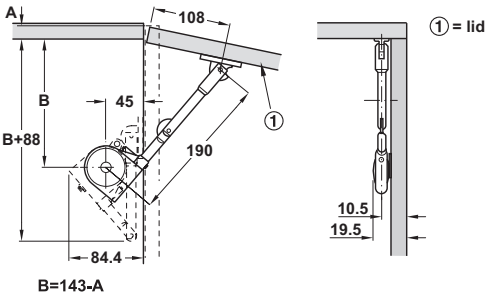

Lid dim. (height H x width B) mm

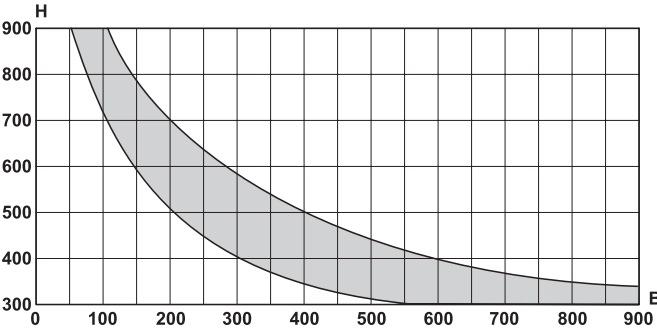


Diagram shows application area using one fitting (lid made from 20 mm thick chipboard with density 500 kg/m³).



Housing colour	Cat. No.
Black	365.31.300

TCH TECHNOLOGY 2023, © Häfele U.K. Ltd 2023. Dimensional data not binding. We reserve the right to alter specifications without notice.