


Firmatop lid stay

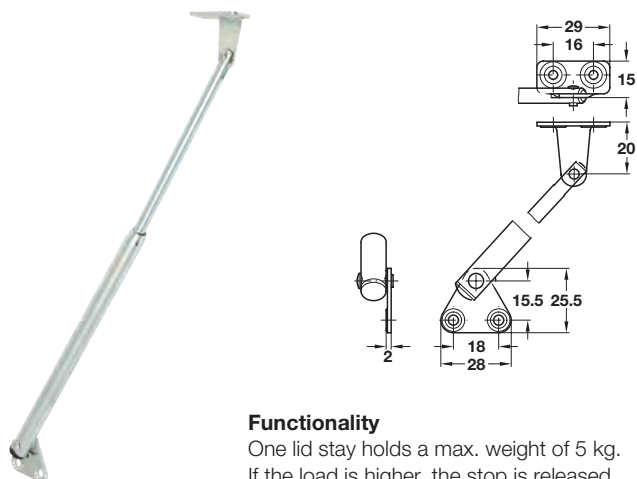


- > Opening angle 75°
- > With spring
- > Spring pressure supports the flap when raised and holds it firmly against the cabinet when closed
- > Screw mounting to side panel and lid
- > Unhanded design
- > One or two stays required, depending on weight of flap
- > Order fixing screws separately
- > Order qty: 1 pc

Functionality

One lid stay holds a max. weight of 5 kg.
If the load is higher, the stop is released.

Installation

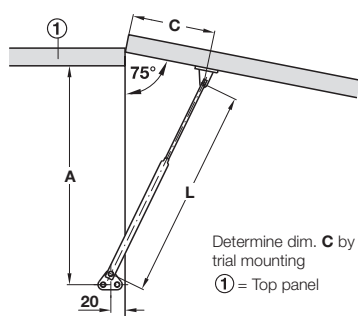


Length	Distance A
130 mm	150 mm
250 mm	260 mm



Length	130 mm	150 mm
Galvanized steel	373.58.704	-
Chrome-plated brass	-	373.58.919

Arretop lid stay

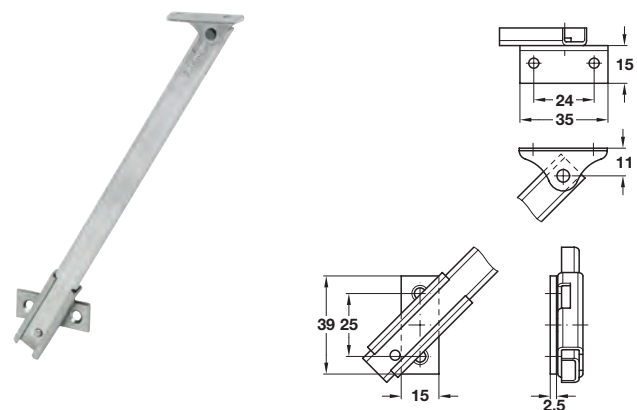


- > With automatic lock
- > Flap is locked when raised approx 75°
- > Raising the flap further disengages the lock allowing it to be closed
- > Screw mounting to side panel and lid
- > Unhanded design
- > Nickel-plated steel lid stay
- > Order fixing screws separately
- > Order qty: 1 pc

Functionality

Open lid: Lift lid to approx. 75° until stay engages.
Close lid: Lift lid slightly. Stop is released.

Installation

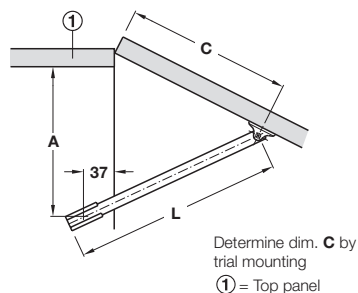

Length	Cabinet depth	Distance A
200 mm	210 mm	150 mm
250 mm	260 mm	180 mm
300 mm	310 mm	230 mm



Length	Cat. No.
200 mm	373.70.611
250 mm	373.70.620
300 mm	373.70.639