


Lid stay

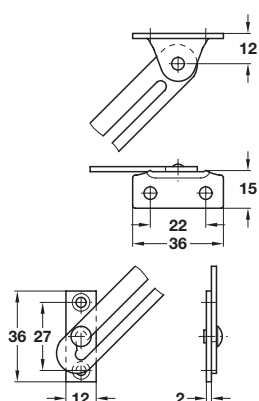


- > With guide slot
- > Suitable for use as a door restraint
- > Left and right handed
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

Functionality


Open lid: Lift lid until stay engages.
Close lid: Lift lid slightly. Stop is released.

Installation




Finish	Left	Right
Nickel-plated	366.40.776	366.40.767


Lid stay

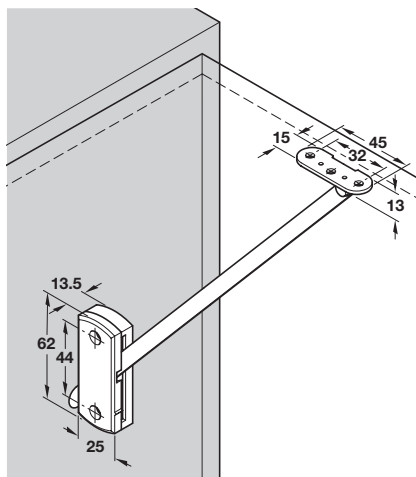

- > With plastic catch housing
- > On raising the flap, the stay will lock into position. Raising the flap further releases the catch allowing it to be closed
- > Screw-mounting to side panel and lid
- > Left and right handed
- > Nickel-plated steel stay with white plastic housing
- > Order fixing screws separately
- > Order qty: 1 pc



Flush fitting flap

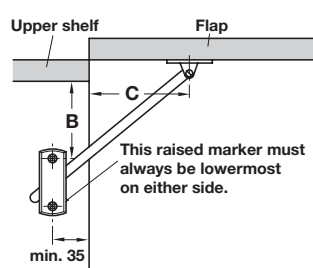

Front-hung flap

Length	Flap height	Flush fitting Dist. A	Front-hung Dist. B
200 mm	up to 500 mm	90 mm	70

Determine distance C by trial mounting



Length	Left	Right
200 mm	373.73.710	373.73.701