


FLAP HINGE AND CATCH

For door fronts hinged at base.



Flap-Ex flap hinge

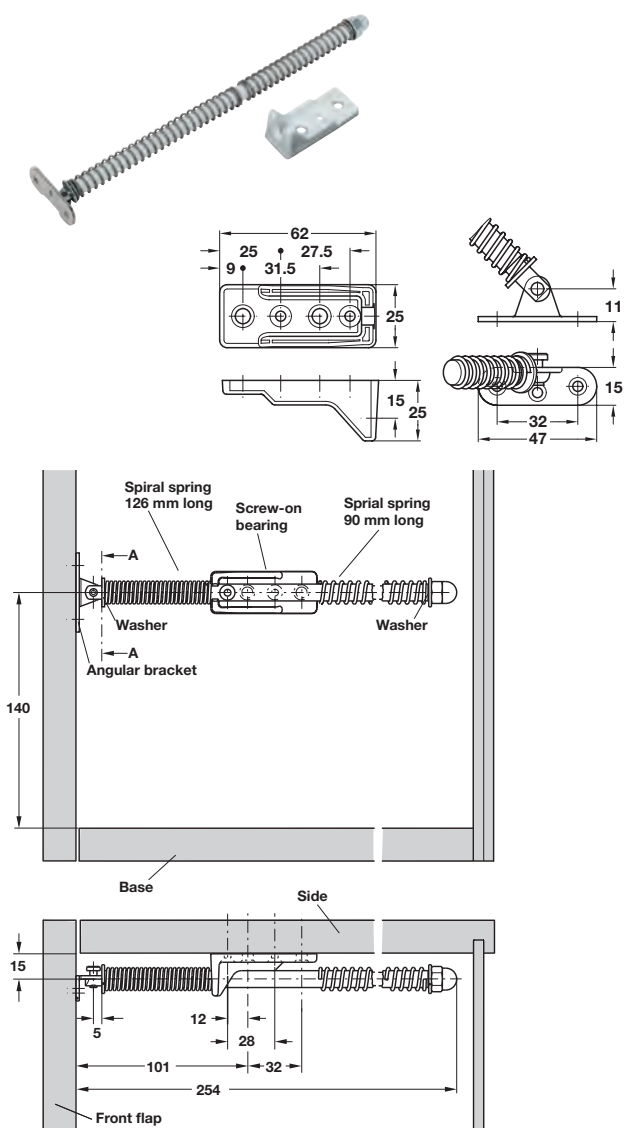

- > Suitable for installation in front flap cabinets min. 820 mm high, min. 400 mm wide with min. installation depth 270 mm
- > Important: Designed to support a chipboard front with maximum dimensions 590 mm high, 400 mm wide, 19 mm thick, maximum weight when full 5 kg

> Comprises:

- 1 Angular bracket, screw fixing, nickel plated steel
- 1 Rod with plastic sleeve
- 2 Washers
- 2 Spiral springs: front 126 mm long, rear 90 mm long
- 1 Bearing, screw fixing, packed loose, white plastic

> Mounting instructions:

Screw fix angular bracket to front panel and bearing to side panel
Push rod into bearing between the two spiral springs

- > For installation of the front flap, the following should be ordered separately:

- 2 cup hinges
- Mini Latch catch

The door is opened by simply applying pressure to the door itself.
When the door is closed, it is secured by the Mini Latch catch

- > Order fixing screws separately
- > Order qty: 1 pc



Cat. No.

Flap-ex flap hinge

365.52.708

YOU ALSO NEED:



CONCEALED CUP HINGES
Page 9.48