



DOOR OPENING MECHANISM

Moves doors forward and away to the side, allowing maximum access to the cabinet.


- > Soft closing
- > No hinges needed
- > Can be used for single doors, double doors, corners, wood doors or glass doors with frames
- > Can be used for every type of furniture

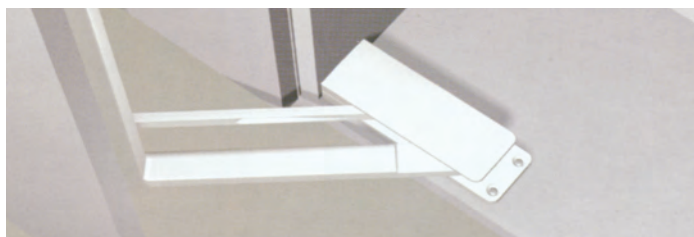

Single door application


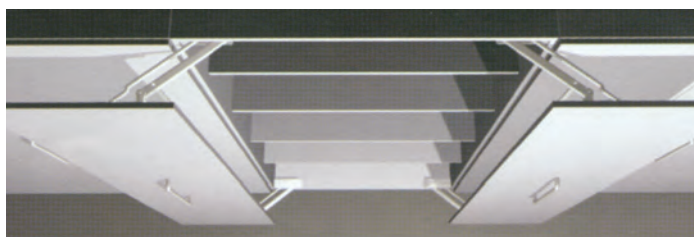


Double door application


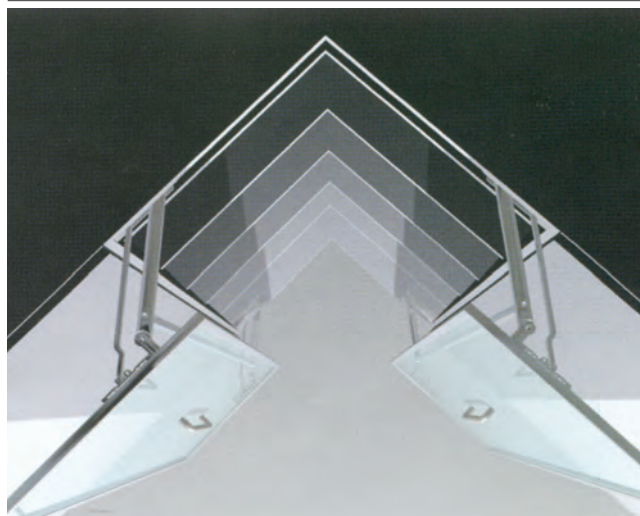


Corner double door application

Door opening mechanism

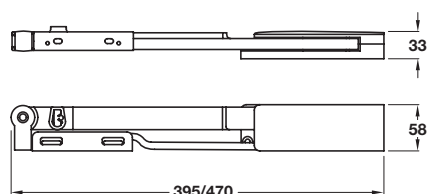

- > Maximum door weight 16 kg
- > Set includes:
 - 2x handed fittings for fixing to cabinet ceiling and floor
 - 2x door mounting brackets
- > Aluminium coloured steel
- > Order fixing screws separately
- > Order qty: 1 set

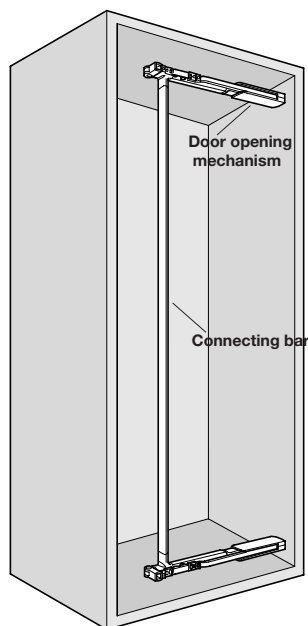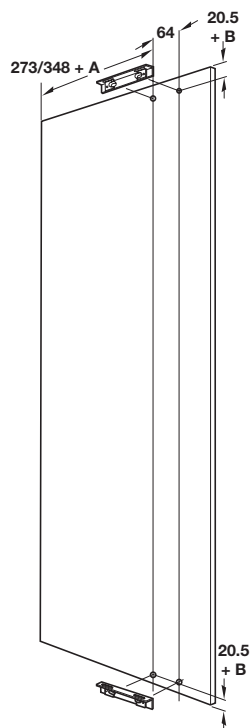

Soft Closing

Min. cabinet width	Travel	For door width	Cat. No.
398 mm	446 mm	450 mm	407.32.906
475 mm	583 mm	600 mm	407.32.907

YOU ALSO NEED:


CENTRE HINGE
Page 9.289

CONNECTING BAR
Page 9.289

Centre hinge



- > For stabilising the connecting bar
- > For use with door opening mechanism set 407.32.906/7 shown on page **9.288**
- > Zinc alloy
- > Order qty: 1 set

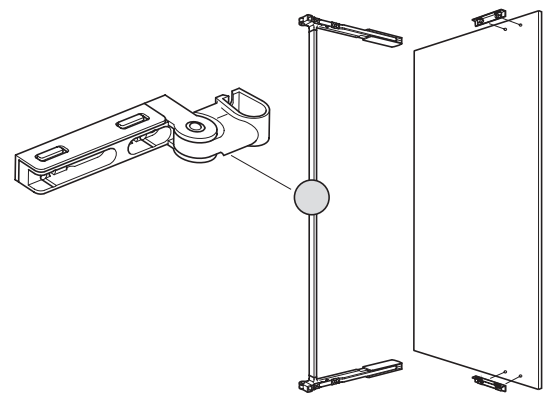

Finish	Cat. No.
Silver coloured	407.32.930

Connecting bar



- > For use with door opening mechanism set 407.32.906/7 shown on page **9.288**
- > Can be cut down to size
- > Correct size of connecting bar is: Installation height - 76 mm
- > Aluminium coloured steel
- > Order qty: 1 pc

Length	Cat. No.
2500 mm	407.32.910

TCH TECHNOLOGY 2023, © Häfele U.K. Ltd 2023. Dimensional data not binding. We reserve the right to alter specifications without notice.