


GRASS TIOMOS M0




- > For door thicknesses of 6-10 mm
- > Opening angle 125°
- > No cup hole necessary
- > For door overlays up to 25 mm
- > 3-dimensional adjustment with appropriate mounting plate
- > Zero protrusion up to 14 mm overlay

Screwing position




Mounting plate height 0			
Z	A+41		
A	Max. 25		
Screwing dimension (Z)			

Overlay

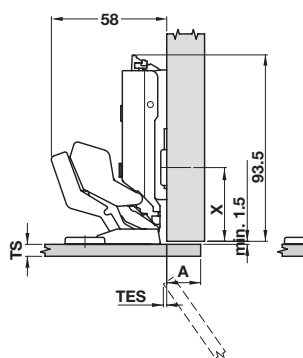


Mounting plate height 0

Half overlay

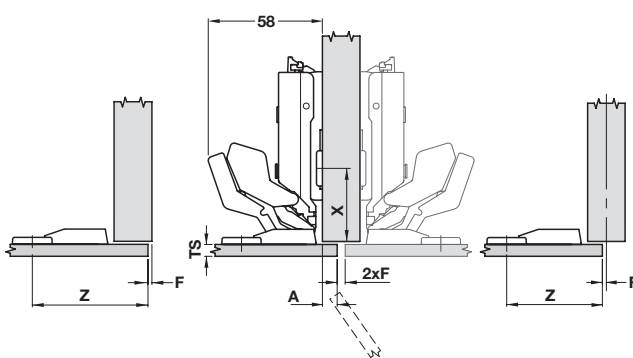

Mounting plate height 0

Inset

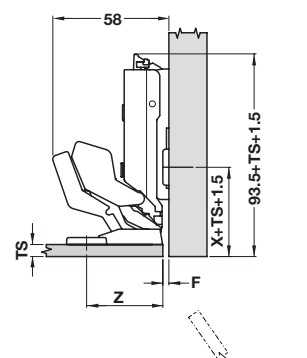

Mounting plate height 0

Minimum gap/minimum reveal

Values for 0 mm mounting plate height

Screwing dim. Z	38		39		47		49		51		53		55	
Door protrusion TES	0		0		0		0		0		0		0	
Door overlay A	-3		-2		6		8		10		12		14	
Door thickness TS														
Min. reveal F / Gap S	F	S	F	S	F	S	F	S	F	S	F	S	F	S
6-10 mm	2	1.5	2	1.5	2	1.5	2	1.5	2	1.5	2	1.5	2	1.5

Minimum gap/minimum reveal

Values for 0 mm mounting plate height


Screwing dim. Z	56		58		60		61		63		64		66	
Door protrusion TES	0.5		1.5		3		3.4		0		0		0	
Door overlay A	15		17		19		20		22*		23*		25*	
Door thickness TS														
Min. reveal F / Gap S	F	S	F	S	F	S	F	S	F	S	F	S	F	S
6-10 mm	2	1.5	2	1.5	2	1.5	2	1.5	2	2.5	2	3	2	4

*Door thickness A = 22-25 mm only opening angle reduction clip



Trial fitting is recommended for all door thicknesses

Grass Tiomos M0

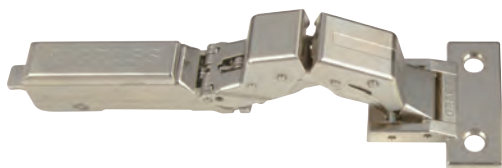

- > Order fixing screws separately, shown below
- > Order qty: 1 pc



Version	Cat. No.
Integrated damper	348.27.801
Without integrated damper	348.27.601
Tipmatic	348.27.401



Ordering information for Tiomos Tipmatic is shown on pages **9.74-75**

Grass countersunk screws for Tiomos M0




348.40.040 - M5 x 6 mm countersunk screw

- > For fixing Tiomos M0 hinges
- > M5 x 6 mm countersunk screw:
For minimum door thickness 6 mm
For aluminium, HPL, mineral composite
Order qty: Multiples of 50 pcs



Item	Cat. No.	Order qty
M5 x 6 mm screw	348.40.040	50 pcs

Grass Tiomos opening angle restraint

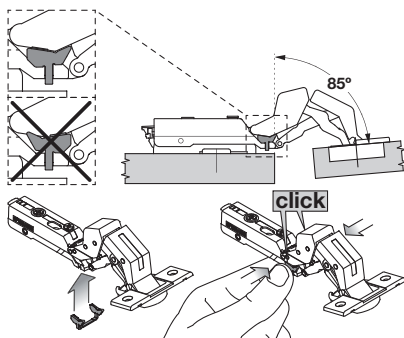

- > Prevents the door from butting against front panels or walls with corner mounting by reducing opening angle to 90°
- > For use with TIOMOS M9, M0 and Mirro 125° hinges
- > Black plastic
- > Order qty: 1 pc



Opening angle	Cat. No.
90°	348.40.012

YOU ALSO NEED:





MOUNTING PLATES
Pages 9.80-82



FIXING SCREWS
Pages 13.6-12

OPTIONAL ACCESSORIES
Pages 9.87-88, 9.126-137

Grass Tiomos inline mounting plate



- > For TIOMOS click on fixing hinges only
- > Varianta screw fixing
- > Two part plate with ± 2 mm height adjustment via worm screw
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc



Height	Varianta screw
0 mm	348.38.501



A wider range of mounting plates are shown on pages **9.80-82**