


LOOX5 12V LED 2071 FLEXIBLE STRIP LIGHT, 8 MM



Aluminium profiles are available to order separately, shown from page **5.184**

Loox5 Eco 12V LED 2071 flexible strip light, monochrome

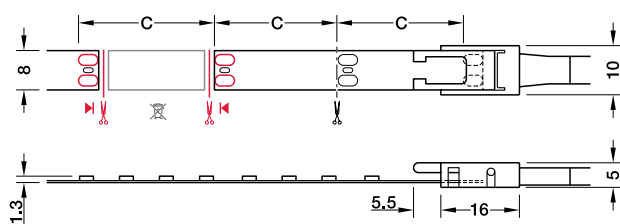

C = section length = 50 mm

- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 50 mm
- > Contact surface length: 4 mm
- > Voltage: 12V. Wattage: 24W or 240W (4.8W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >30,000 h, st. L70/B50 >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

2700 K	3000 K	4000 K	5000 K		120°
940 lx	1010 lx	1145 lx	1250 lx		250 mm
405 lx	440 lx	495 lx	530 lx		500 mm
220 lx	240 lx	270 lx	295 lx		750 mm
155 lx	165 lx	190 lx	200 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 5.0 m
- > Lead must be ordered separately, shown on page **5.171**

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	4.8W per metre			
Energy efficiency:				
Number of diodes:	60 per metre			
Light output (Lm/m):	440	465	490	495
Efficacy (Lm/W):	92	97	102	103
CRI Ra / R9:	>90 / >50			

ARTICLES REMOVED FROM PAGE

833.74.300 DISCONTINUED - REPLACED BY **833.74.065**

833.74.301 DISCONTINUED - REPLACED BY **833.74.066**

833.74.302 DISCONTINUED - REPLACED BY **833.74.067**

833.74.303 DISCONTINUED - REPLACED BY **833.74.068**

833.74.304 DISCONTINUED - REPLACED BY **833.74.165**

833.74.305 DISCONTINUED - REPLACED BY **833.74.166**

833.74.306 DISCONTINUED - REPLACED BY **833.74.167**

833.74.307 DISCONTINUED - REPLACED BY **833.74.168**

5 12V					
Length	2700 K	3000 K	4000 K	5000 K	
5 m	833.74.065	833.74.066	833.74.067	833.74.068	
50 m	833.74.165	833.74.166	833.74.167	833.74.168	

YOU ALSO NEED:



DRIVER
Page 5.156



LEAD
Page 5.171



SWITCH
Page 5.160-166

OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181

PAGE AMENDED
21.08.25/7

LOOX5 12V LED 2074 FLEXIBLE STRIP LIGHT, 8 MM

Specially engineered for manufacturers with up to 30,000 hours life and the same quality light output as our leading Loox5 ribbons. Can also be remote controlled using the Häfele Connect Mesh system. The LED 2074 strip light with 600 LEDs is ideal for direct task lighting to illuminate work spaces or display areas.




An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**



Loox5 12V LED 2074 flexible strip light



- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 48W or 480W (9.6W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

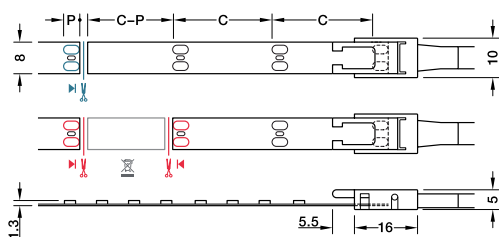

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length = 25 mm

P = length of contact surface = 4.0 mm

2700 K	3000 K	4000 K	5000 K		120°
2145 lx	2250 lx	2300 lx	2300 lx	250 mm	
900 lx	940 lx	950 lx	955 lx	500 mm	
480 lx	505 lx	510 lx	515 lx	750 mm	
300 lx	310 lx	320 lx	320 lx	1000 mm	



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 4.0 m
- > Lead must be ordered separately, shown on page **19**

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	9.6W per metre			
Energy efficiency:				
Number of diodes:	120 per metre			
Light output (Lm/m):	920	970	1000	1040
Efficacy (Lm/W):	96	101	104	108
CRI Ra / R9:	>90 / >50			

5 12V



Length	2700 K	3000 K	4000 K	5000 K
5 m	833.74.308	833.74.309	833.74.310	833.74.311
50 m	833.74.312	833.74.313	833.74.314	833.71.315

YOU ALSO NEED:



OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181

LOOX5 12V LED 2073 FLEXIBLE STRIP LIGHT, 8 MM


Specially engineered for manufacturers with up to 30,000 hours life and the same quality light output as our leading Loox5 ribbons. Order the Häfele Connect Mesh system to control these strip lights using the remote control or own smartphone. Cool whit and warm white LED's in the smallest of spaces. Optimal light mixture without flickering.



Aluminium profiles are available to order separately, shown from page **5.184**



Loox5 12V LED 2073 flexible strip light

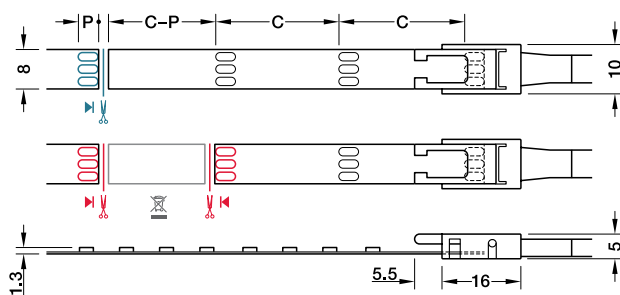

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 50 mm

P = length of contact surface: 4.0 mm

2700 K	5000 K	120°	
1025 lx	1075 lx		250 mm
425 lx	445 lx		500 mm
230 lx	245 lx		750 mm
145 lx	150 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 4.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.173**

- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 50 mm
- > Voltage: 12V. Wattage: 24W or 240W (4.8W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

Output:	2700 - 5000 K
Light colour:	Multi-white
Wattage (W):	4.8W per metre
Energy efficiency:	
Number of diodes:	2x 60 per metre
Light output (Lm/m):	425 - 465
Efficacy (Lm/W):	88 - 96
CRI Ra / R9	>90 / >50

5 12V						
Length	2700 - 5000 K					
5 m	833.74.316					
50 m	833.74.317					

YOU ALSO
NEED:



DRIVER
Page 5.156



LEAD
Page 5.173



SWITCH
Page 5.160-166



CONTROL
Page 5.178-180

OPTIONAL ACCESSORIES
Pages 5.159, 5.167-168

LOOX5 12V LED 2076 FLEXIBLE STRIP LIGHT, 8 MM


Specially engineered for manufacturers with up to 30,000 hours life and the same quality light output as our leading Loox5 ribbons. Order the Häfele Connect Mesh system to control these strip lights using the remote control or own smartphone. Cool white and warm white LED's in the smallest of spaces. Optimal light mixture without flickering.



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**



Loox5 12V LED 2076 flexible strip light

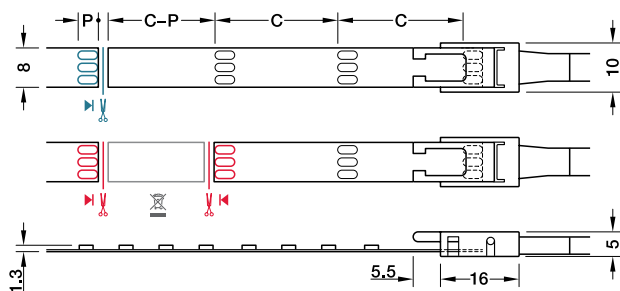

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 25 mm

P = length of contact surface: 3.5 mm

Distance	120°	2700 K	5000 K
250 mm		2040 Lx	2110 Lx
500 mm		850 Lx	875 Lx
750 mm		460 Lx	470 Lx
1000 mm		280 Lx	290 Lx

The values apply to a strip light length of 1 m



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.173**

- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 48W or 480W (9.6W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

Output:	2700 - 5000 K
Light colour:	Multi-white
Wattage (W):	9.6W per metre
Energy efficiency:	
Number of diodes:	2x 120 per metre
Light output (Lm/m):	875 - 940
Efficacy (Lm/W):	91 - 97
Colour Rendering Index:	>90 / >50



Length	2700 - 5000 K
5 m	833.74.318
50 m	833.74.319

YOU ALSO
NEED:



DRIVER

Page 5.156



LEAD

Page 5.173



SWITCH

Page 5.160-166



CONTROL

Page 5.178-180

OPTIONAL ACCESSORIES

Pages 5.159, 5.167-168

PAGE AMENDED
21.08.25/7


LOOX5 12V LED 2078 FLEXIBLE STRIP LIGHT, 8 MM

Specially engineered for manufacturers with up to 30,000 hours life and the same quality light output as our leading Loox5 ribbons. Order the Häfele Connect Mesh system to control these strip lights using the remote control or own smartphone. Cool white and warm white LED's in the smallest of spaces. Optimal light mixture without flickering.



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 12V LED 2078 flexible strip light

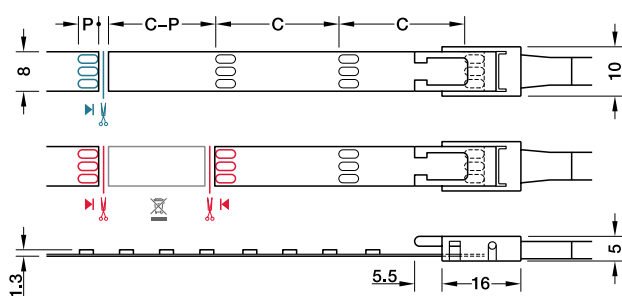

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 25 mm

P = length of contact surface: 3.5 mm

Distance	120°	2700 K	5000 K
250 mm		1025 Lx	1075 Lx
500 mm		425 Lx	445 Lx
750 mm		230 Lx	245 Lx
1000 mm		145 Lx	150 Lx

The values apply to a strip light length of 1 m



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.173**

- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 24W or 240W (4.8W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

Output:	2700 - 5000 K
Light colour:	Multi-white
Wattage (W):	4.8W per metre
Energy efficiency:	
Number of diodes:	2x 120 per metre
Light output (Lm/m):	425 - 465
Efficacy (Lm/W):	88 - 96
Colour Rendering Index:	>90 / >50

5 12V						
Length	2700 - 5000 K					
5 m	833.74.381					
50 m	833.74.382					

YOU ALSO
NEED:

DRIVER
Page 5.156

LEAD
Page 5.173

SWITCH
Page 5.160-166

CONTROL
Page 5.178-180

OPTIONAL ACCESSORIES
Pages 5.159, 5.167-168

PAGE AMENDED
21.08.25/7


LOOX5 12V LED 2079 FLEXIBLE STRIP LIGHT, 8 MM

Specially engineered for manufacturers with up to 30,000 hours life and the same quality light output as our leading Loox5 ribbons. Order the Häfele Connect Mesh system to control these strip lights using the remote control or own smartphone. Cool white and warm white LED's in the smallest of spaces. Optimal light mixture without flickering.



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 12V LED 2079 flexible strip light

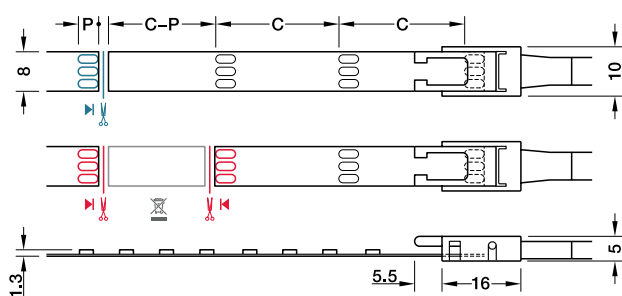

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 25 mm

P = length of contact surface: 3.5 mm

Distance	120°	2700 K	5000 K
250 mm		1560 Lx	1610 Lx
500 mm		640 Lx	660 Lx
750 mm		345 Lx	355 Lx
1000 mm		210 Lx	220 Lx

The values apply to a strip light length of 1 m



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.173**

- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 12V. Wattage: 36W or 360W (7.2W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

Output:	2700 - 5000 K
Light colour:	Multi-white
Wattage (W):	4.8W per metre
Energy efficiency:	
Number of diodes:	2x 120 per metre
Light output (Lm/m):	650 - 670
Efficacy (Lm/W):	90 - 93
CRI Ra / R9:	>90 / >50

5 12V						
Length	2700 - 5000 K					
5 m	833.74.383					
50 m	833.74.384					

YOU ALSO
NEED:

DRIVER
Page 5.156

LEAD
Page 5.173

SWITCH
Page 5.160-166

CONTROL
Page 5.178-180


OPTIONAL ACCESSORIES
Pages 5.159, 5.167-168

LOOX5 12V LED 2069 FLEXIBLE STRIP LIGHT, 8 MM



Aluminium profiles are available to order separately, shown from page **5.184**

Loox5 Eco 12V LED 2069 flexible strip light monochrome

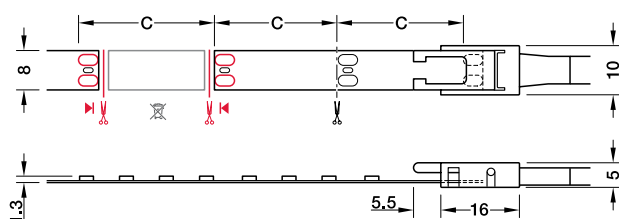

C = section length = 25 mm

2700 K	3000 K	4000 K	5000 K	120°	
960 lx	1040 lx	1180 lx	1270 lx		250 mm
415 lx	450 lx	510 lx	550 lx		500 mm
230 lx	250 lx	280 lx	300 lx		750 mm
160 lx	170 lx	195 lx	210 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 5.5 m
- > Lead must be ordered separately, shown on page **5.171**

- > Equipped with high-quality CREE LEDs
- > Area of application: Behind furniture and objects
- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Contact surface length: 4 mm
- > Voltage: 12V. Wattage: 24W or 240W (4.8W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >30,000 h, st. L70/B50 >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

Output:	3000 K	4000 K	5000 K
Light colour:	Warm white	Cool white	Cool white
Wattage (W):	4.8W per metre		
Energy efficiency:			
Number of diodes:	120 per metre		
Light output (Lm/m):	520	530	540
Efficacy (Lm/W):	108	110	113
CRI Ra / R9:	>92 / >50		

ARTICLES REMOVED FROM PAGE
833.74.455 DISCONTINUED

833.74.456 DISCONTINUED - REPLACED BY **833.74.036**
833.74.457 DISCONTINUED - REPLACED BY **833.74.037**
833.74.458 DISCONTINUED - REPLACED BY **833.74.038**
833.74.476 DISCONTINUED - REPLACED BY **833.74.136**
833.74.477 DISCONTINUED - REPLACED BY **833.74.137**
833.74.478 DISCONTINUED - REPLACED BY **833.74.138**

5 12V					
Length	3000 K	4000 K	5000 K		
5 m	833.74.036	833.74.037	833.74.038		
50 m	833.74.136	833.74.137	833.74.138		

YOU ALSO NEED:



DRIVER
Page 5.156



LEAD
Page 5.171



SWITCH
Page 5.160-166


OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181

LOOX5 24V LED 3074 FLEXIBLE STRIP LIGHT, 8 MM



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 Eco 24V LED 3074 flexible strip light monochrome

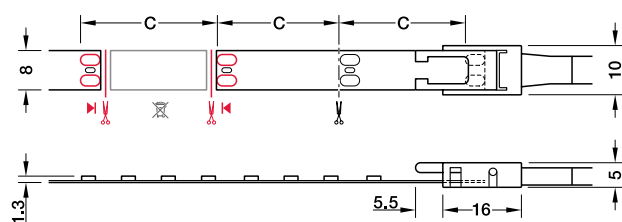

C = section length = 50 mm

- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 50 mm
- > Contact surface length: 4 mm
- > Voltage: 24V. Wattage: 48W or 480W (9.6W per metre)
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >30,000 h, st. L70/B50 >50,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)

2700 K	3000 K	4000 K	5000 K		120°
2230 lx	2270 lx	2400 lx	2400 lx		250 mm
925 lx	940 lx	990 lx	990 lx		500 mm
500 lx	505 lx	530 lx	530 lx		750 mm
305 lx	310 lx	330 lx	320 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.157**
- > Maximum recommended strip light length for optimum visual light output: 7.0 m
- > Lead must be ordered separately, shown on page **5.171**

Output:	3000 K	4000 K	5000 K
Light colour:	Warm white	Cool white	Cool white
Wattage (W):	9.6W per metre		
Energy efficiency:			
Number of diodes:	120 per metre		
Light output (Lm/m):	905	960	930
Efficacy (Lm/W):	94	100	97
CRI Ra / R9:	>92 / >50		

ARTICLES REMOVED FROM PAGE
833.74.240 DISCONTINUED

833.75.241 DISCONTINUED - REPLACED BY **833.76.636**
833.75.242 DISCONTINUED - REPLACED BY **833.76.637**
833.75.243 DISCONTINUED - REPLACED BY **833.76.638**
833.75.246 DISCONTINUED - REPLACED BY **833.76.736**
833.75.247 DISCONTINUED - REPLACED BY **833.76.737**
833.75.248 DISCONTINUED - REPLACED BY **833.76.738**

5 24V



IP20



LOOK
7
YEARS
GUARANTEE

Fixings
included

Length	3000 K	4000 K	5000 K
5 m	833.76.636	833.76.637	833.76.638
50 m	833.76.736	833.76.737	833.76.738

YOU ALSO NEED:



DRIVER
Page 5.157



LEAD
Page 5.171



SWITCH
Page 5.160-166

OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181


PAGE AMENDED
21.08.25/7

LOOX5 24V LED 3014 FLEXIBLE STRIP LIGHT, 8 MM



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 24V LED 3014 flexible strip light

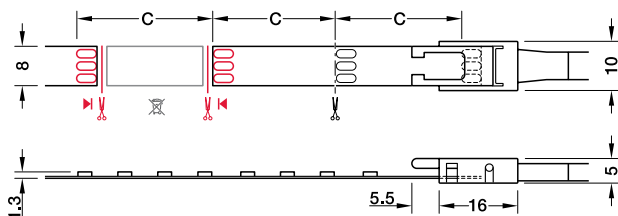

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 25 mm

P = length of contact surface: 3.5 mm

2700 K	5000 K	120°	
2130 lx	2390 lx		250 mm
870 lx	975 lx		500 mm
465 lx	525 lx		750 mm
290 lx	320 lx		1000 mm



- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter; order separately, shown from page **5.178**
- > Lead must be ordered separately, shown on page **5.173**

- > For surface mounting, self adhesive, 5 m or 50 m length
- > Can be shortened every 25 mm
- > Voltage: 24V. Wattage: 48W or 480W (9.6W per metre)
- > Colour control only via Häfele Connect Mesh 6-way distributor with multi-white adapter, must be ordered separately
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >30,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m or 50 m length)


Output:	2700 - 5000 K
Light colour:	Multi-white
Wattage (W):	9.6W per metre
Energy efficiency:	
Number of diodes:	2x 120 per metre
Light output (Lm/m):	875 - 940
Efficacy (Lm/W):	91 - 97
Colour Rendering Index:	>90 / >50

5 24V						
Length	2700 - 5000 K					
5 m	833.77.270					
50 m	833.77.271					

YOU ALSO NEED:

	DRIVER Page 5.156		LEAD Page 5.173		SWITCH Page 5.160-166		CONTROL Page 5.178-180	OPTIONAL ACCESSORIES Pages 5.159, 5.167-168
--	-----------------------------	--	---------------------------	--	---------------------------------	--	----------------------------------	---

Packed sets, Loox5 24V LED 3014 flexible strip light

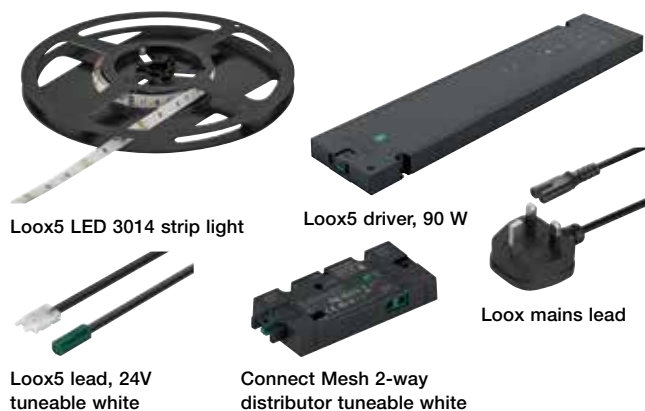

Please order Connect Mesh control separately if required, shown on pages **5.180-181**

- > Set consists of:
 - 1x roll LED 3014 strip light
 - 2x Loox5 lead for LED strip light tuneable white, 2000 mm length
 - 1x Loox5 driver 24 V, output power 90 W, 316 x 70 x 16 mm
 - 1x Loox mains lead, UK moulded plug, 2000 mm length
 - 1x Connect Mesh 2-way distributor with programmable switching function, tuneable white
- > Order qty: 1 set

5 24V						
Length	2700 - 5000 K					
5 m	833.87.596					

LOOX5 24V LED 3174 STRIP LIGHT MONOCHROME COB




- > COB LED, i.e. continuous phosphor coating over all individual LEDs of the entire band, without visible points
- > Homogeneous illumination, no visible LED points
- > Refraction angle of 150°
- > Can also be shortened between cutting marks



An aluminium profile is recommended for installation of 9.6W/m lights, aluminium profiles are shown from page **5.184**

Loox5 24V LED 3174 strip light, 8 mm, monochrome Free Cut COB

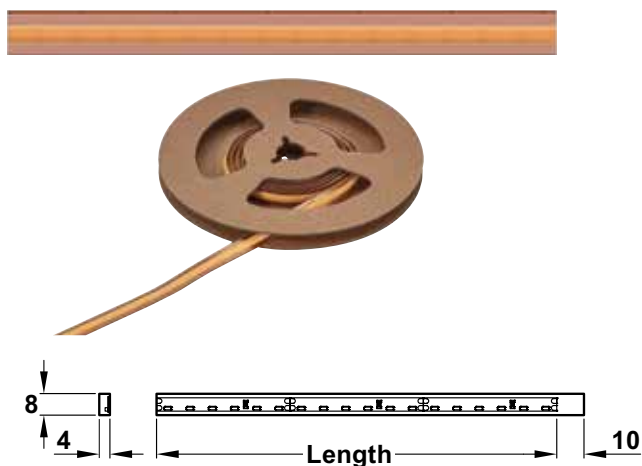

Yellow: illuminated strip section
Grey: non-illuminated strip section
(when cut between 2 cutting marks)
C = Section length

2700 K	3000 K	4000 K	5000 K	150°	
990 lx	1030 lx	1115 lx	1165 lx		250 mm
440 lx	455 lx	490 lx	510 lx		500 mm
240 lx	255 lx	265 lx	275 lx		750 mm
155 lx	160 lx	175 lx	180 lx		1000 mm

Illuminance value lx applies to 1 m strip length

- > For surface mounting, self adhesive, 5 or 50 m length
- > Voltage: 24V. Wattage: See table below
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: >50,000 h
- > Width: 8 mm
- > Height: 2 mm
- > Section length: Free Cut – can be cut to any desired length (cut sections every 16 mm)
- > Minimum bend radius: 30 mm
- > Lead not included, must be ordered separately
- > Plastic
- > Order qty: 1 pc (roll of 5 or 50 m length)

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white	Warm white	Cool white	Cool white
Max. strip length (visual) m:	3	3	3	3
Wattage (W/m):	9.6	9.6	9.6	9.6
Energy efficiency:				
Number of diodes	480	480	480	480
Light output (Lm/m):	710	750	820	815
Efficacy (Lm/W):	74	78	85	85
CRI Ra / R9:	>90 / >50	>90 / >50	>90 / >50	>90 / >50

Length	2700 K	3000 K	4000 K	5000 K
5 m	833.75.310	833.75.311	833.75.312	833.75.313
50 m	833.75.315	833.75.316	833.75.317	833.75.318



Maximum strip length (visual) describes a strip section with a visually imperceptible drop in luminous flux of max. 30%. Please note: A strip section with a new power supply that follows immediately is noticeably brighter. Max. wattage-dependent strip length on the driver, see technical data for LED strip lights

YOU ALSO
NEED:



DRIVER
Page 5.157



LEAD
Page 5.172A



SWITCH
Page 5.160-166



CONTROL
Page 5.178-180

OPTIONAL ACCESSORIES
Pages 5.159, 5.167-168