


Häfele Loox5 LED 3178

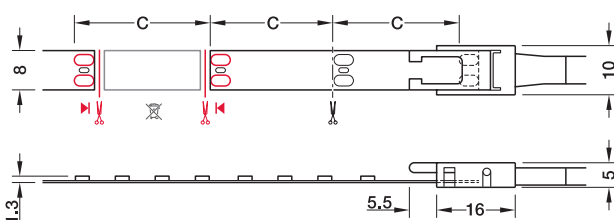

C = Section length

Illuminance value in lx applies to
1 m strip length, without diffuser:

2700 K	5000 K	120°	
970 lx	1270 lx		250 mm
420 lx	550 lx		500 mm
230 lx	300 lx		750 mm
160 lx	210 lx		1000 mm



Voltage	Number of LEDs	Colour temper- ature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index	Energy efficiency class	Section length C	Max. strip length (visual)	Available length	
V	LEDs/m	K	W/m	lm/m	lm/W	R _a	R _g	mm	m	5 m	50 m
5 ^{24 V}	Häfele Loox5 LED 3178										
	2x 120	2700 5000	4.8	450-515	93-107	92	>50	A F	50	9.5	833.76.670

> Equipped with high-quality CREE LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Colour: White
- > Width: 8 mm
- > Height: 1.3 mm
- > Contact surface length: 3.6 mm
- > Life time: L80/B10 >30,000 h
L70/B50 >50,000 h
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

! Order reference:
Please order lead, driver and switch separately

➔ Aluminium profile recommended for appealing design, diffuse light distribution, mechanical protection and heat management

5^{24V} Loox5 24 V driver must be ordered separately



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Please note: A strip section with a new power supply that follows immediately is noticeably brighter
Maximum wattage-dependent strip length on the driver