





Connect Mesh controls

Motion detector Häfele Connect Mesh



Housing for
undermounted light

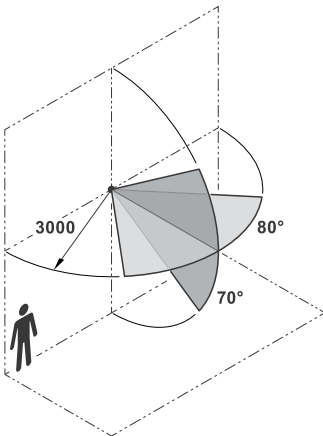

Sensor range

- > Programming of the motion sensor and brightness sensor functions via app.
- > The modular supply cables are only required for the power supply.
- > The switching signal is transmitted via Bluetooth®

- > Area of application: For controlling components at the Häfele Connect Mesh 6-way distributor
- > Switching function: on/off
Dawn threshold value
- > Material: Plastic
- > Power consumption: 2 W
- > Sensor angle: 80°
- > Vertical sensor bracket: 70°
- > Sensor range: 3000 mm
- > Signal transmission: Wired
- > Ambient temperature: -20 - 35 °C
- > Mounting: For mounting in drilled hole and for clamp fixing
For screwing
- > Supplied with: 1 furniture switch
1 surface mounted housing

Colour	Colour	Design	Cat. No.
5 24 V	Black, matt	Frame: plastic, black	850.00.155

Soft switch-on and after-run time, brightness sensor threshold value adjustable via the app

Please order lead (modular with Loox5 2-pin snap-in connector) separately.
Please note nominal voltage!
Please order Häfele Connect Mesh 6-way Odistributor separately.