



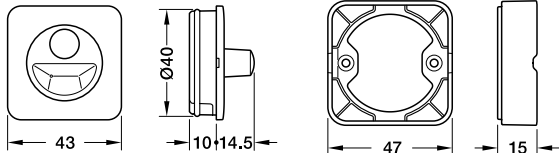


Motion detector Häfele Connect Mesh

1



Housing for
undermounted light

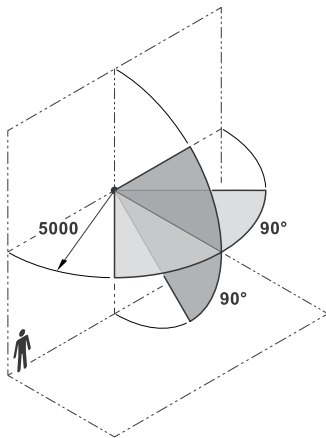

Sensor range

Sensor range 5000 mm with temperature difference of 4° C between environment and moving object. Range up to 7000 mm at a difference of 8° C.

> Programming of the functions of the motion sensor and the brightness sensor via app.

- > Area of application: For controlling components at the Häfele Connect Mesh 6-way distributor
- > Switching function: on/off
Dawn threshold value
- > Material: Plastic
- > Type of battery: Lithium
- > IEC standard battery size: CR2032
- > Embedded battery: Replaceable
- > Battery service life: > 1 Year
- > Sensor angle: 90°
- > Vertical sensor bracket: 90°
- > Sensor range: 5000 mm
- > Signal transmission: Bluetooth®
- > Ambient temperature: -20 - 35 °C
- > Mounting: For mounting in drilled hole and for clamp fixing
For screwing
- > Supplied with: 1 furniture switch
1 surface mounted housing

Colour	Design	Cat. No.
Black, matt	Frame: plastic, black	850.00.153

! Soft switch-on and after-run time, brightness sensor threshold value adjustable via the app.

+ The motion detector requires 1 CR2032 lithium button cell battery (002.99.032), please order separately for Cat. No. 850.00.153, 850.00.253m and 850.00.953. Please order Häfele Connect Mesh 6-way distributor separately.