


Loox5 drivers

24 V



1

Häfele Loox5 driver constant voltage 24 V

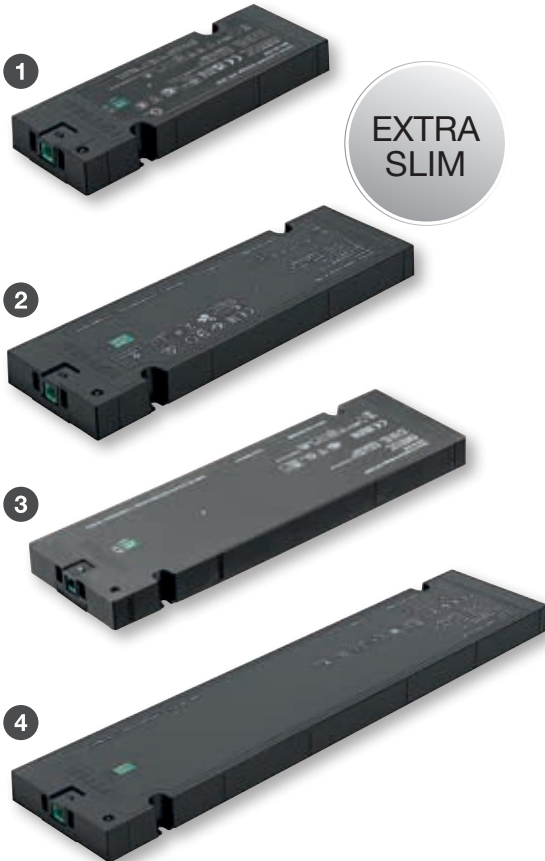

- > Version: With overload protection
- > Colour: Black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 24 V
- > Number of connections: 1x socket Loox5 24 V
- > Life time: >50,000 hours
- > Supplied with: 1 driver with mounting accessories

5 24 V	Output power	Output current	Standby power consumption	Dim. (L x W x H)	Cat. No.
	W	A	W	mm	
1	20	-	≤0.2	140 x 50 x 16	833.95.026
2	40	1.67	≤0.3	191 x 60 x 16	833.95.010
3	60	-	≤0.3	230 x 70 x 16	833.95.020
4	90	3.75	≤0.3	316 x 70 x 16	833.95.011

ARTICLES REMOVED FROM PAGE
833.95.009 DISCONTINUED - REPLACED BY 833.95.026

- ! Ambient temperature –25 °C to +45 °C
Ensure that there is a sufficient air supply and circulation at the mounting location

- ! Maximum lead length from the Loox5 driver to the device is 10 m
Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver (12 V or 24 V)
Not to be used/installed with a mains dimmable wall switch

Loox main leads, socket at cable: C7



- > Voltage: 250V
- > Material: Plastic
- > Colour: Black
- > Packing: 1 pc

Type	Length mm	Cat. No.
UK moulded plug	2000 5000	833.89.000 833.89.080
Bare ended	2000	833.89.009

- ! Loox extension leads available to order separately, see page ► 1.141