


Loox5 compatible LED strip lights



Monochrome Flex



Häfele Loox5 compatible LED Flex 1350 strip light

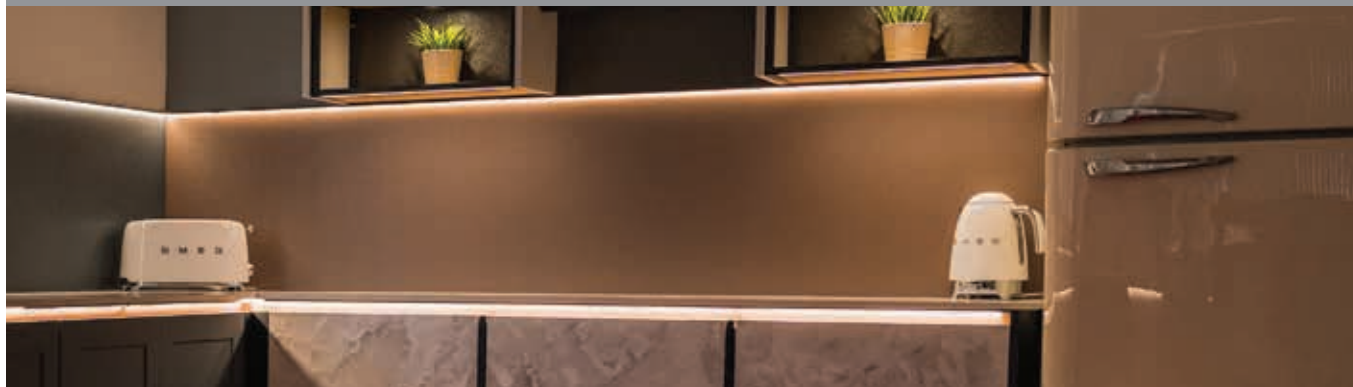

LED 1350

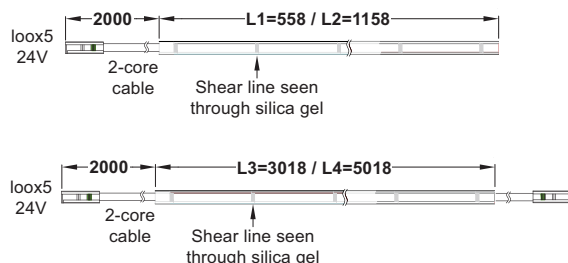

Effortlessly create lighting designs that flex and bend around tight angles and corners without losing any light

- > Easy push fit install
- > For 6 mm deep groove, shelves remain adjustable
- > Shapes and curves are possible due to the light's flexibility (max. 30 mm radius)
- > 3018/5018 mm lengths can be split once: Both pieces with separate lead
- > For use with or without special profiles - for plinth, Gola handle-free system, or AluSplash®

- | | |
|-------------------------|--|
| > Dimmable: | Yes |
| > Material: | Silicone sleeve |
| > Width: | 6.5 mm |
| > Height: | 6 mm |
| > Degree of protection: | IP44 (if cut, strip light needs to be sealed) |
| > Mounting: | For recess mounting, push fit into 6.5 x 6 mm groove |
| > Section length: | 42 mm |
| > Min. bend radius: | 30 mm |
| > Supplied with: | 1 roll |
| | 558 mm length: With 2.0 m lead with Loox5 24V connector |
| | 3018/5018 mm lengths: With 2.0 m lead on each end of strip light, with Loox5 24V connector |



Order reference:
Please order lead, driver and switch separately



For use with the Flex profiles shown on page ► 1.42
Installation tools are available to order separately: Ø 6.5 mm router 002.15.768



5 24V

Loox5 24 V driver see page ► 1.137



Häfele Loox5 compatible LED Flex 1350 strip light

Voltage	Number of LEDs	Colour temperature	Watt-age	Lumi-nous flux	Lumi-nous efficacy	Colour rendering index CRI		Energy effi-ciency class	Section length C	Max. strip length (visual)	Available length		
V	LEDs/m	K	W/m	lm/m	lm/W	R _a	R ₉		mm	m	558 mm	3018 mm	5018 mm
5 24 V	Loox5 compatible LED 1350												
	144	4000	9.6	929	66	>90	>50	A G	42	5	833.01.245	833.01.247	833.01.248



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%. Please note: A strip section with a new power supply that follows immediately is noticeably brighter. Max. wattage-dependent strip length on the driver, see technical data for LED strip lights

→ Packed sets, Häfele Loox5 compatible LED Flex 1350 strip light



Loox5 LED Flex 1350 strip light



Loox5 Eco driver, 40 W



Loox5 Eco driver, 90 W



Loox mains lead

Voltage	Supplied with	Colour temperature	Energy effi-ciency class	Section length C	Max. strip length (visual)	Available length	Cat. No.
V		K		mm	m		
5 24 V	Loox5 compatible LED Flex 1350 strip light packed sets						
	1 roll LED Flex 1350 strip light 3018 mm length 1 Loox5 Eco driver 24 V, output power 40 W, 190 x 60 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	4000	A G	42	5	3018 mm	833.87.639
	1 roll LED Flex 1350 strip light 5018 mm length 1 Loox5 Eco driver 24 V, output power 90 W, 292 x 70 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	4000	A G	42	5	5018 mm	833.87.640
	1 roll LED Flex 1350 strip light 3018 mm length 1 roll LED Flex 1350 strip light 5018 mm length 1 Loox5 Eco driver 24 V, output power 90 W, 292 x 70 x 16 mm 1 Loox mains lead, UK moulded plug, 2000 mm length	4000	A G	42	5	8036 mm	833.87.641