

SLIDO F-PARK71 16B FOR PIVOT DOORS

Vorfront or Infront pivot sliding door fitting for wooden doors.



- > Slido F-Park71 16B
- > Range:
 - For door height: ≤ 1500 mm
 - For door thickness: **16 – 25 mm** for Infront
 - 16 – 19 mm** for Vorfront

Door width: ≤ 700 mm


Max. door weight: **16 kg**

- > Material: Guide and cable: steel, Guide roller: plastic
- > Finish/colour: Guide: black zinc plated, Cable: black plastic-coated, guide roller: white
- > Mounting: For screw fixing



Please order door fixing set separately

Cable tension adjustment

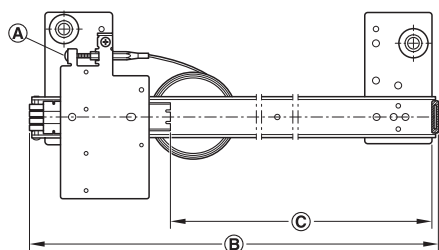

A = Cable tension adjustment screw

B = Guide length

C = Retraction distance

Door overlay calculation


Full overlay mounting:

Door overlay = door width – retraction distance

Inset mounting:



Door overlay = door width – retraction distance – door leaf thickness

Guide installation

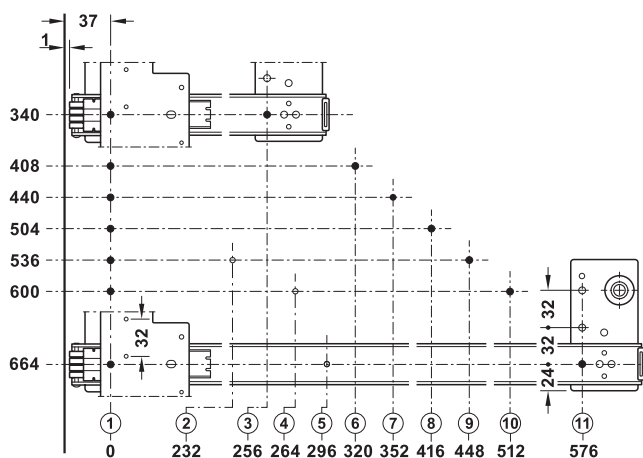


Dimensioning applies to full overlay mounting; for inset mounting, the screw positions are shifted inwards by the thickness of the door leaf

Application

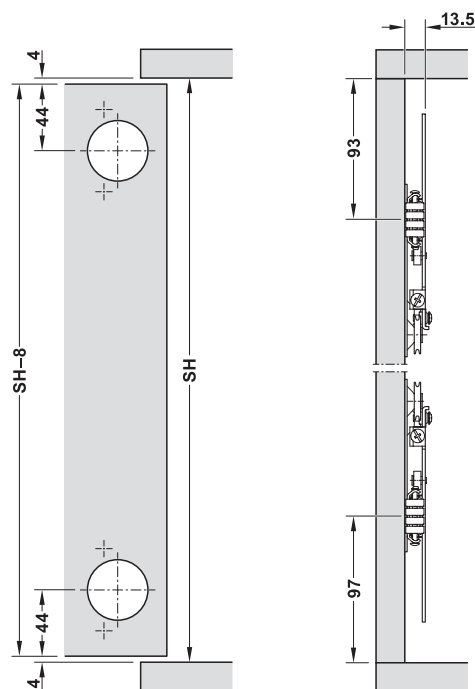

Slido F-Park71 16B 1 door complete set

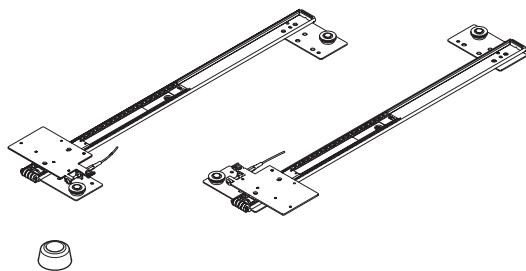

- > Supplied with:
 - 2x Guides for top and bottom, incl. cables
 - 10x Fixing screws 4 x 12 mm, for guide
 - 2x Door stoppers
 - 2x Fixing screws 3.5 x 25 mm, for door stopper
- > Order qty: 1 set





Please order door fixing set separately. It is recommended to use 2 concealed hinges with soft closing mechanism up to a door height of 1500 mm

Guide length	Retraction distance max.	For 1 door
340 mm	230 mm	408.25.007
408 mm	294 mm	408.25.008
440 mm	326 mm	408.25.009
504 mm	390 mm	408.25.010
536 mm	422 mm	408.25.011
600 mm	486 mm	408.25.012
664 mm	550 mm	408.25.013

Door fixing set for Slido F-Park71 16/25B Infront



Drilling pattern for cup fixing

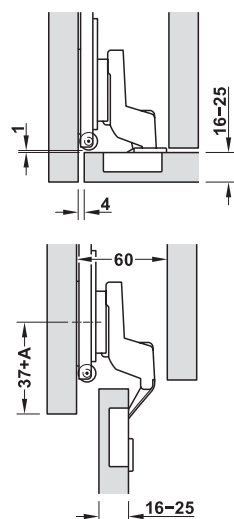

A = Door thickness



- > Area of application: Häfele Slido F-Park71 16B/25B, Infront
- > For inset mounting (Infront), door thickness 16 – 25 mm
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing
- > Supplied with
 - 1 Concealed hinge, opening angle 95°
 - 1 Cruciform mounting plate
 - 2 Fixing screws M4 x 6 mm, for mounting plate
 - 2 Fixing screws 3.5 x 15 mm, for hinge cup
- > Order qty: 1 set

Version	Black
With soft closing mechanism	408.00.404
Without soft closing mechanism	408.00.405

Door fixing set for Slido F-Park71 16/25B Vorfront



Drilling pattern for cup fixing

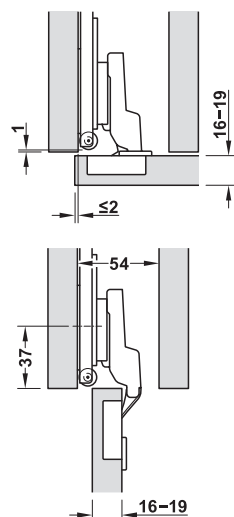

- > Area of application: Häfele Slido F-Park71 16B/25B, Vorfront
- > For full overlay mounting (Vorfront), door thickness 16 – 19 mm
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing
- > Supplied with
 - 1 Concealed hinge, opening angle 95°
 - 1 Cruciform mounting plate
 - 2 Fixing screws M4 x 6 mm, for mounting plate
 - 2 Fixing screws 3.5 x 15 mm, for hinge cup
- > Order qty: 1 set

Version	Black
With soft closing mechanism	408.00.406
Without soft closing mechanism	408.00.412