

1

A modern interior hallway with a large, open wooden wardrobe. The wardrobe has multiple shelves, hanging rods with clothes, and drawers at the bottom. To the left of the wardrobe is a large glass door leading outside, with a potted plant nearby. To the right of the wardrobe is a yellow bench and a wall with framed pictures.

-  Please order door fixing set separately

A technical drawing of a mechanical assembly, likely a pump or motor component. The drawing shows a cross-section of the assembly. On the left, there is a flange with a central bolt. A dimension line labeled 'A' indicates the distance from the center of this bolt to the center of the main shaft. The main shaft is a long, cylindrical component with a central hole. A dimension line labeled 'B' indicates the total length of the shaft. A dimension line labeled 'C' indicates the distance from the center of the shaft to the center of the right-hand flange. The right-hand flange is similar to the left-hand one, with a central bolt. The drawing includes various lines representing the geometry of the parts, including a dashed line for the central axis of the shaft.

Technical drawing showing a 12x12x12 inch grid with dimensions and part views. The grid is defined by horizontal and vertical dashed lines. Dimensions are indicated by arrows and numbers:

- Horizontal dimensions (top and bottom): 37, 1, 232, 256, 264, 296, 320, 352, 416, 448, 512, 576.
- Vertical dimensions (left and right): 340, 408, 440, 504, 536, 600, 664, 24, 32.

Part views are shown at the corners of the grid:

- Top-left view: A component with a central hole and a smaller hole to its right.
- Bottom-left view: A component with a central hole and a smaller hole to its right, with a dimension of 32 indicated.
- Bottom-right view: A component with a central hole and a smaller hole to its right, with a dimension of 24 indicated.


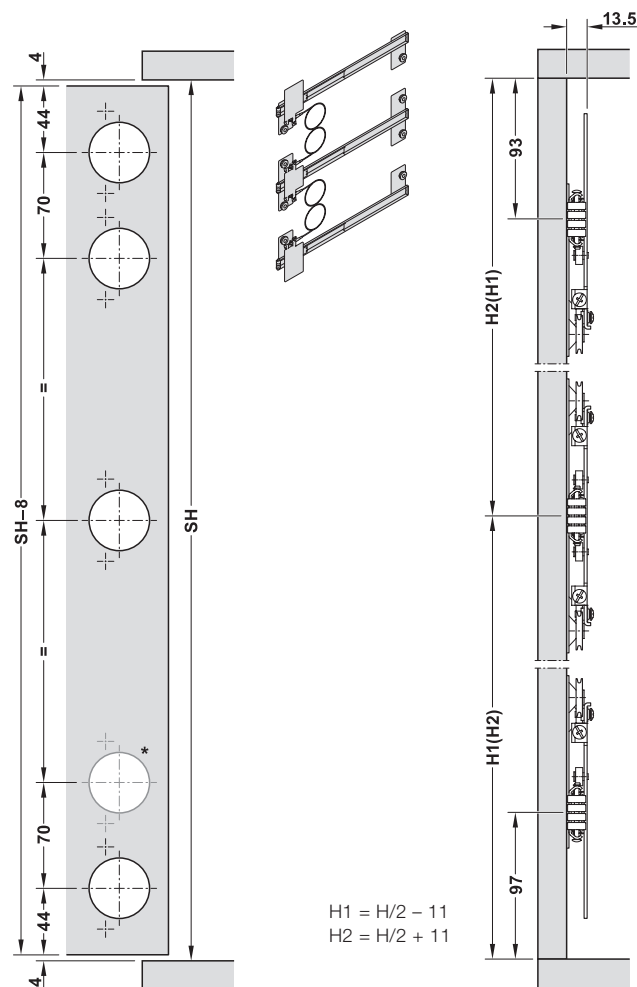


Illustration shows left-hand mounting
Specification in brackets for right-hand
mounting

Slido F-Park71 25B 1 door complete set



- > Supplied with:
 - 2x Guides for top and bottom, incl. cables
 - 1x Central guide, incl. cable
 - 17x Fixing screws 4 x 12 mm, for guide
 - 2x Door stoppers
 - 2x Fixing screws 3.5 x 25 mm, for door stopper
- > Order qty: 1 set

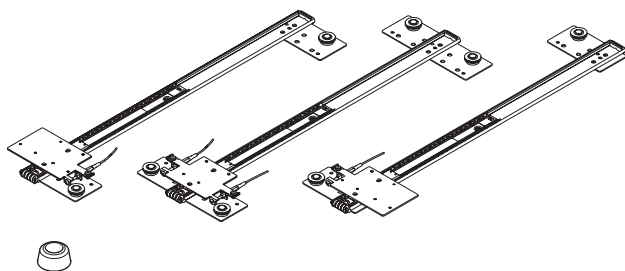



- > Please order door fixing set separately.
- > For door height 1500 – 1800 mm: Please use 2 hinges with soft-closing mechanism + 2 hinges without soft-closing mechanism
- > For door height 1801 – 2300 mm: Please use 3 hinges with soft-closing mechanism + 2 hinges without soft-closing mechanism

Guide length	Retraction distance max.	For 1 door
340 mm	230 mm	408.25.000
408 mm	294 mm	408.25.001
440 mm	326 mm	408.25.002
504 mm	390 mm	408.25.003
536 mm	422 mm	408.25.004
600 mm	486 mm	408.25.005
664 mm	550 mm	408.25.006

Door fixing set for Slido F-Park71 16/25B Infront



Drilling pattern for cup fixing

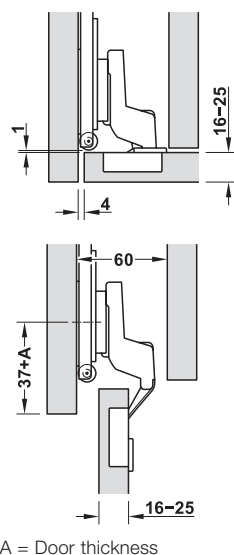



- > Area of application: Häfele Slido F-Park71 16B/25B, Infront
- > For inset mounting (Infront), door thickness 16 – 25 mm
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing
- > Supplied with
 - 1 Concealed hinge, opening angle 95°
 - 1 Cruciform mounting plate
 - 2 Fixing screws M4 x 6 mm, for mounting plate
 - 2 Fixing screws 3.5 x 15 mm, for hinge cup
- > Order qty: 1 set

Version	Black
With soft closing mechanism	408.00.404
Without soft closing mechanism	408.00.405

Door fixing set for Slido F-Park71 16/25B Vorfront



Drilling pattern for cup fixing

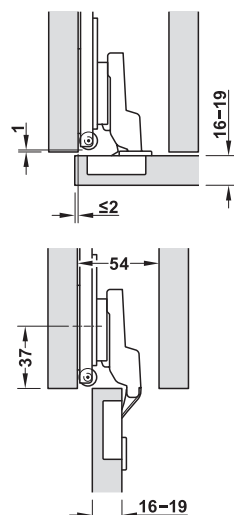

- > Area of application: Häfele Slido F-Park71 16B/25B, Vorfront
- > For full overlay mounting (Vorfront), door thickness 16 – 19 mm
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing
- > Supplied with
 - 1 Concealed hinge, opening angle 95°
 - 1 Cruciform mounting plate
 - 2 Fixing screws M4 x 6 mm, for mounting plate
 - 2 Fixing screws 3.5 x 15 mm, for hinge cup
- > Order qty: 1 set

Version	Black
With soft closing mechanism	408.00.406
Without soft closing mechanism	408.00.412