
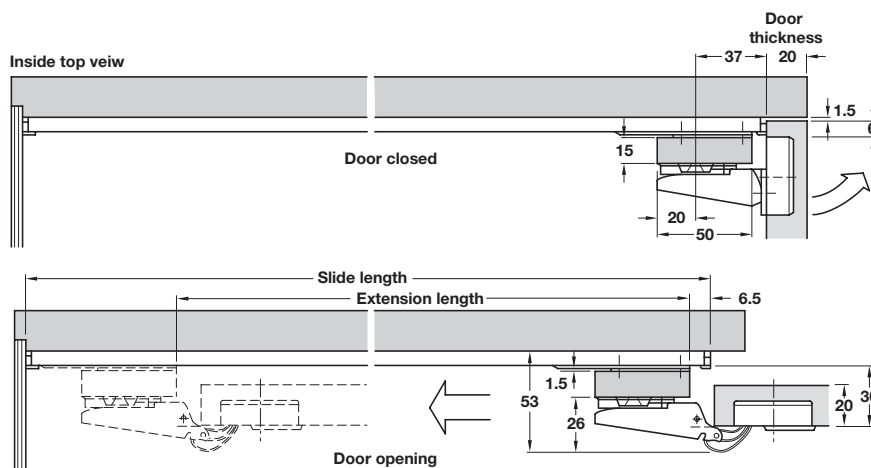
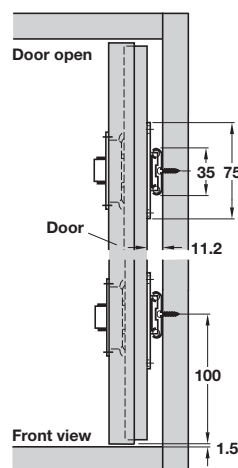
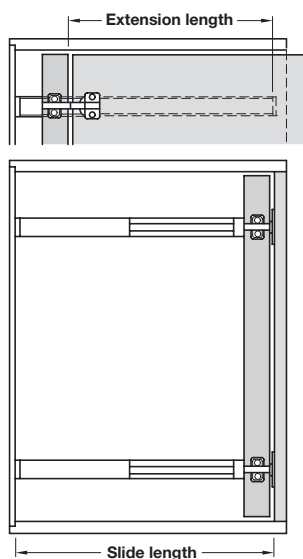


ACCURIDE 1312, HORIZONTAL OR VERTICAL USE

1

Fittings for pivot sliding cabinet doors.


- > Horizontal and vertical use
- > Range:
 - Maximum door weight **5.5 kg**
 - Door heights up to **900 mm**
 - Panel thickness from **16-20 mm**
- > Door supports required when fitting horizontally
- > Robust mounting plate for ease and security of door attachment
- > Maximum door extension allows ease of hinge operation
- > Unhanded design
- > Quiet and easy movement
- > 32 mm hole pattern

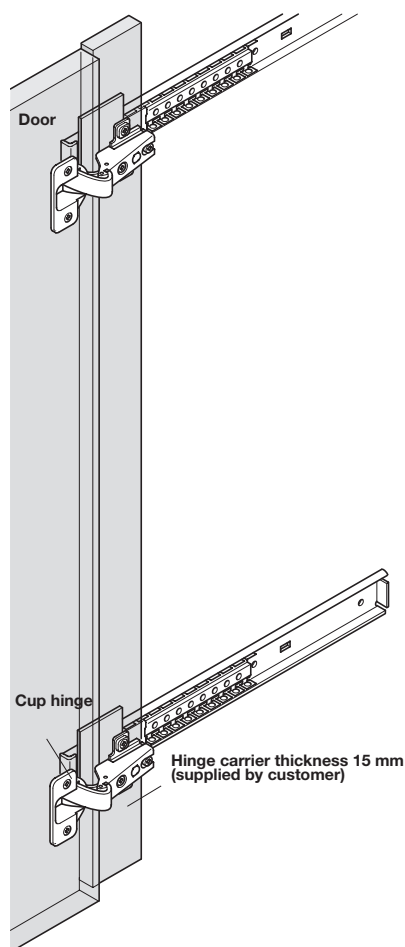

Accuride 1312 pivot sliding door fittings



- > Bright zinc-plated steel
- > Order qty: 1 pair (per door)

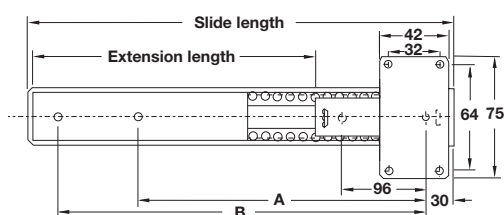

Slide length =

Min. carcase depth required to install fitting

Extension length =

Max. door width that can be withdrawn inside the carcase

Slide length	Extension length	Dim. A	Dim. B
350 mm	257 mm	192	288
400 mm	307 mm	224	320
450 mm	357 mm	256	352
500 mm	407 mm	352	448
550 mm	457 mm	352	448
600 mm	507 mm	448	544



Slide length	Cat. No.
350 mm	408.08.357
400 mm	408.08.400
450 mm	408.08.455
500 mm	408.08.508
550 mm	408.08.553
600 mm	408.08.606



Hinges and mounting plates must be ordered separately

TIOMOS hinge, full overlay plus mounting



- > Opening angle 110°
- > Sprung, soft close
- > Ø 35 mm screw fixing with click on arm
- > For door thickness upto 24 mm
- > Steel cup and hinge arm
- > Order qty: 1 pc (order 2 pcs per door)



Mounting plate must be ordered separately, shown below

Type	Cat. No.
With soft close	348.31.800

Mounting plate, 3-point fixing



- > Hospa screw fixing, for Tiomos click-on system hinges
- > Height adjustment via slot
- > Nickel-plated steel
- > Order qty: 1 pc



Height	Cat. No.
-2 mm	348.38.560