



ACCURIDE 1319, HORIZONTAL OR VERTICAL USE

Fittings for pivot sliding cabinet doors.

- > Vertical or horizontal use
- > Quiet and easy movement
- > Panel thickness from **16-20 mm**
- > Maximum door weight **5.5 kg**
- > Maximum door height **700 mm**




For taller/heavier doors use synchronized control system Accuride 1316 in conjunction with Accuride 1319 (see pages **1.128-129**). See table for max. door weight and heights available

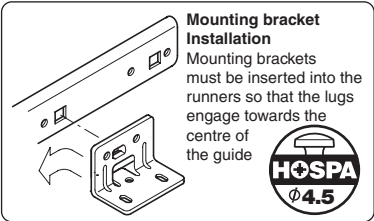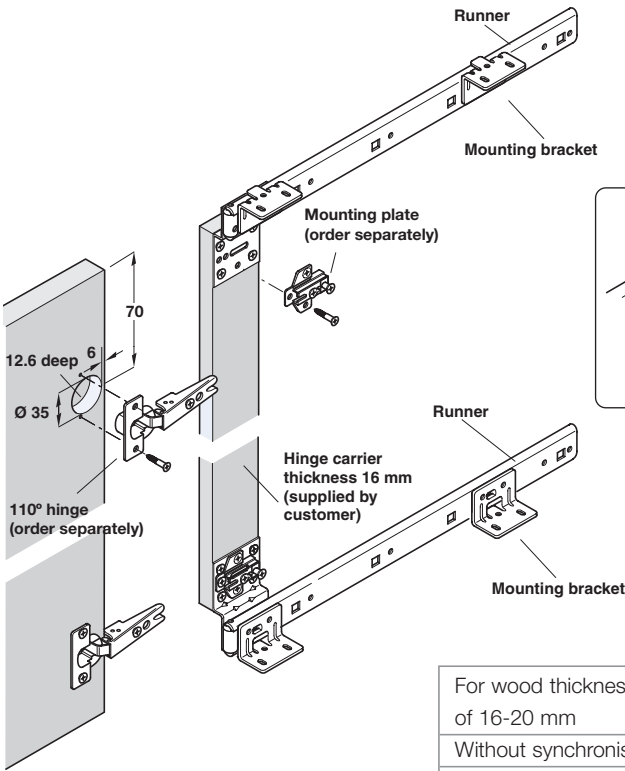


For wood thicknesses of 16-20 mm	Door height up to	Door weight up to	No. hinges required
Without synchronised control	700 mm	5.5 kg	2
With synchronised control	2300 mm	25 kg	2-5 depending on door width

A trial installation should be made for other door heights and weights


Mounting diagram for doors or flaps opening upwards (horizontal use)

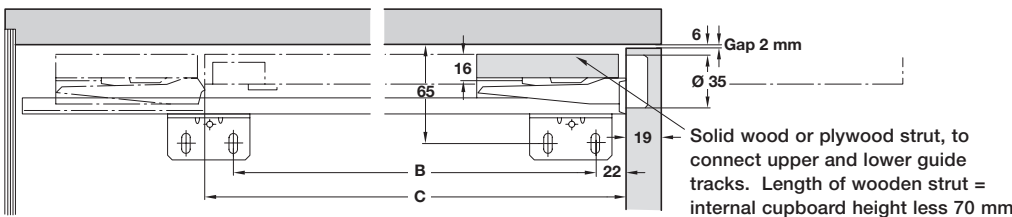

Mounting diagram for doors opening normally (vertical use)

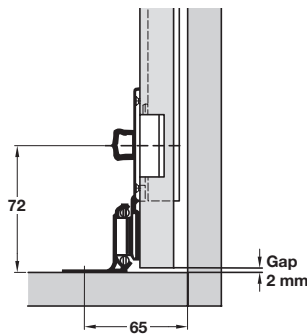

Accuride 1319 pivot sliding door fittings

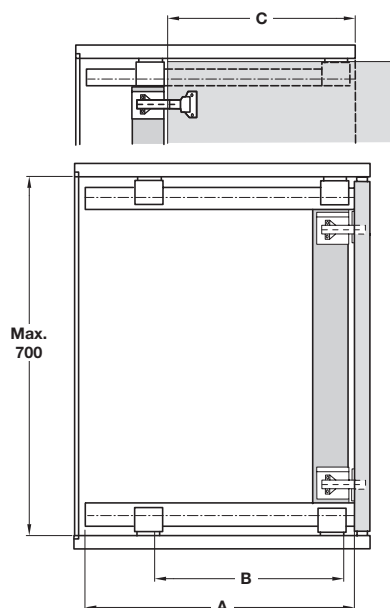

Installed length = Min. carcase depth required to install fitting

Extension length = Max. door width that can be withdrawn inside the carcase

- > Comprises:
 - 4x mounting brackets, zinc-plated steel
 - 2x runners, zinc-plated steel, to accommodate cruciform mounting plates
- > Please note: Hinge carrier not supplied; should be made on site
- > Order qty: 1 set (per door)

Installed length A	Bracket position B	Extension length C
350 mm	186 mm	244 mm
400 mm	236 mm	294 mm
450 mm	286 mm	344 mm
500 mm	336 mm	394 mm
550 mm	386 mm	444 mm
600 mm	436 mm	494 mm



Installed length A	Cat. No.
350 mm	408.07.350
400 mm	408.07.403
450 mm	408.07.458
500 mm	408.07.501
550 mm	408.07.556
600 mm	408.07.609



Hinge carrier not supplied; should be made on site

Click-on hinge, for overlay doors



Mounting plate 322.85.750 (0 mm height) must be ordered separately, shown below

- > Opening angle 110°
- > Sprung
- > Ø 35 mm screw fixing cup
- > For door thickness up to 22 mm
- > Nickel-plated pressed steel cup and arm
- > Order qty: 1 pc (order 2 pcs per door)



Type	Cat. No.
Without soft close	322.17.530

Super compact cruciform mounting plate



- > Hospa screw fixing, for click-on system hinges
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order qty: 1 pc



Height	Cat. No.
0 mm	322.85.750