

ACCURIDE 1319 WITH ACCURIDE 1316

Used as supplement to pivot door fitting Accuride 1319 to enhance its action when tall and heavy doors are used vertically.

> Range:

Max. door height **2300 mm** (Not suitable for horizontal use over 1200 mm)






Order Accuride 1319 separately shown on pages **1.126-127**




For wood thicknesses of 16-20 mm	Door height up to	Door weight up to	No. hinges required
Without synchronised control	700 mm	5.5 kg	2
With synchronised control	2300 mm	25 kg	2-5 depending on door width

A trial installation should be made for other door heights and weights

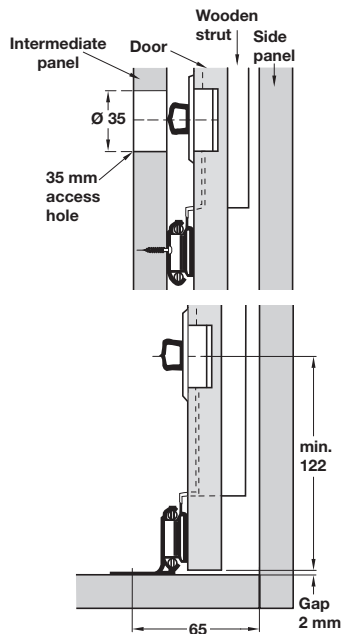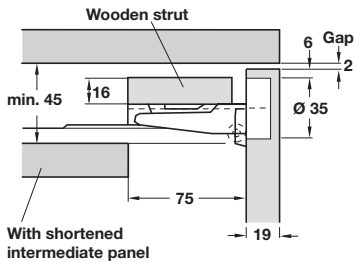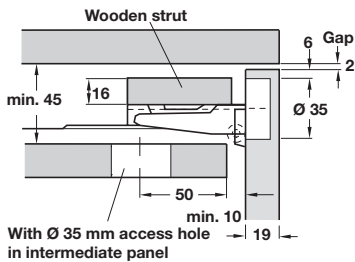

Accuride 1316 synchronised control system

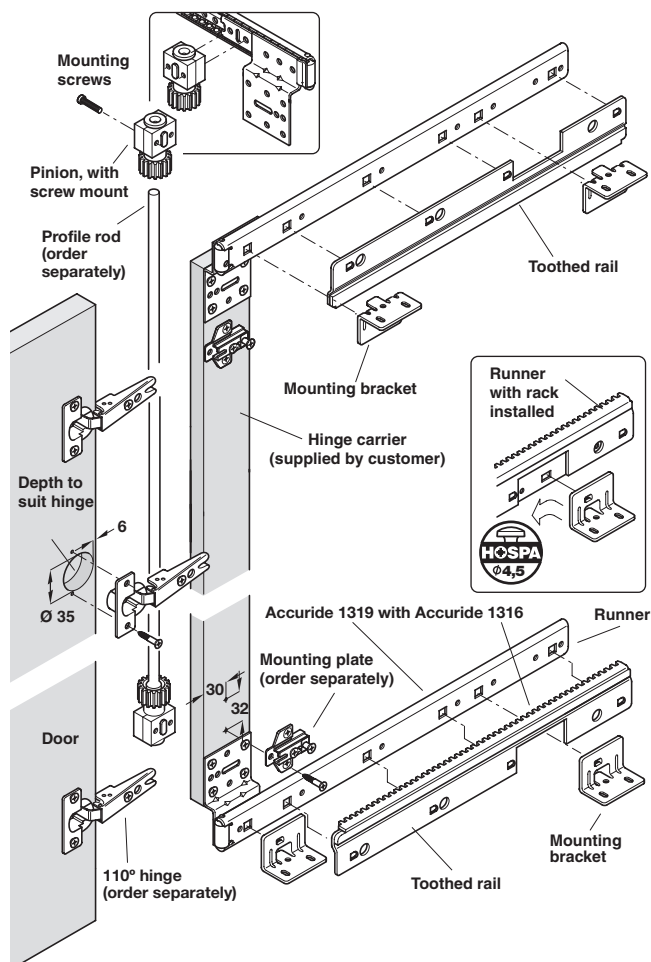

- > Comprises:
 - 2x rod guides, white plastic
 - 2x toothed rails, galvanized steel/white plastic
 - 2x pinions with screw mounts, white plastic
 - Mounting screws, M4 x 25 mm
- > To be used with Accuride 1319 system shown on pages **1.126-127**
- > Order qty: 1 set (per door)



Suitable for installed length A	Cat. No.
350 mm	408.05.356
400 mm	408.05.409
450 mm	408.05.454
500 mm	408.05.507
550 mm	408.05.552
600 mm	408.05.605



Profile rod must be ordered separately, shown below

Profile rod



- > Standard lengths of 2 or 2.5 m
- > Length of profiled rod: Internal cupboard height less 63 mm
- > Polished nickel-plated drawn steel
- > Order qty: 1 pc (per door)

Length	Max. door height	Cat. No.
2000 mm	1800 mm	226.67.205
2500 mm	2300 mm	226.67.250


Cover cap



White

Brown

- > To conceal Ø 35 mm drilled hole
- > Plastic
- > Order qty: Multiples of 100 pcs



Finish	Cat. No.
White	340.41.702
Brown	340.44.708