



ACCURIDE 1321, VERTICAL USE

Fittings for pivot sliding cabinet doors.


- > For vertical use
- > For concealed doors, wall units and cabinets
- > For panel thickness **19-38 mm**
- > Full overlay on **19.1 mm** panel thickness
- > Maximum door weight **14 kg**
- > Maximum door panel width **610 mm**
- > Maximum door panel height **1067 mm**
- > Auto open mechanism pushes the door open the last 32 mm of travel
- > Anti-sag adjustment
- > Hinges (40 mm cup) included

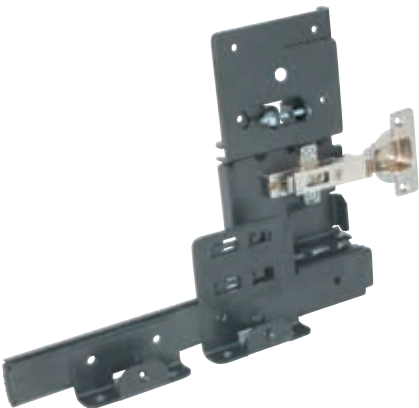

Overlay



Inset

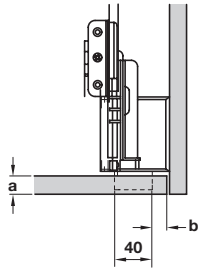


Overlay application

a	b	c
19.1 mm	12.7 mm	19.1 mm
22.2 mm	12.7 mm	15.9 mm
25.4 mm	12.7 mm	12.7 mm
31.8 mm	12.7 mm	6.4 mm

Inset application

a	b
19.1 mm	9.5 mm
22.2 mm	9.5 mm
25.4 mm	9.5 mm
38.1 mm	9.5 mm

Accuride 1321 pivot sliding door runners

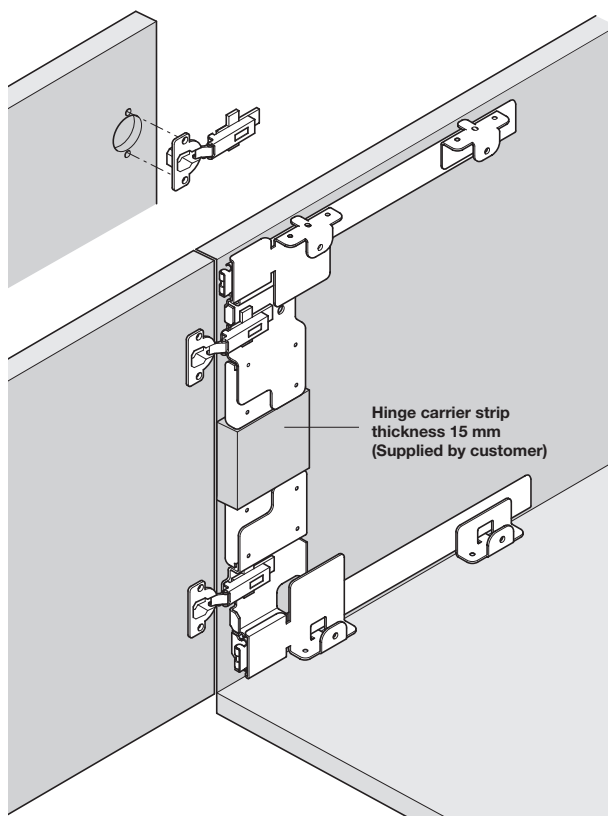


- > Black zinc-plated steel
- > Order qty: 1 pair (per door)

Installed length = Minimum carcass depth required to install fitting
Extension length = Maximum door width that can be withdrawn inside the carcass



Hinge carrier not supplied;
should be made on site

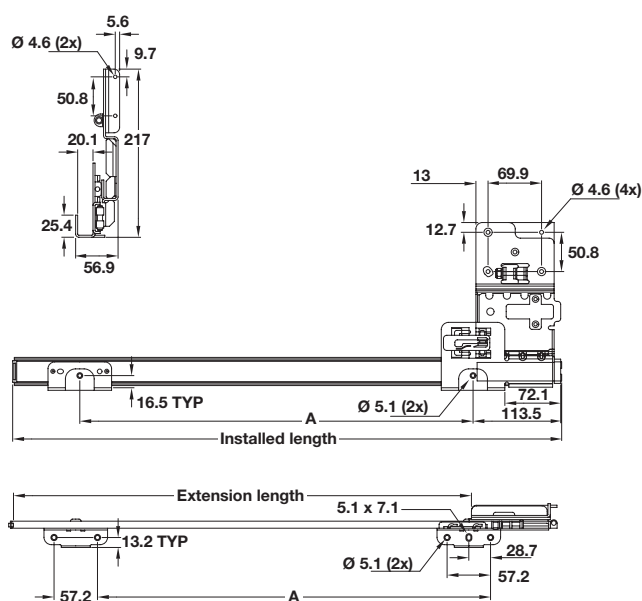

Installed length	Extension length	Dim. A
405 mm	290 mm	203.2 mm
456 mm	340 mm	254 mm
506 mm	391 mm	304.8 mm
557 mm	442 mm	355.6 mm
608 mm	493 mm	406.2 mm
659 mm	544 mm	457.2 mm
710 mm	594 mm	508 mm



Installed length	Cat. No.
405 mm	408.34.341
456 mm	408.34.346
506 mm	408.34.351
557 mm	408.34.356
608 mm	408.34.361
659 mm	408.34.366
710 mm	408.34.371