
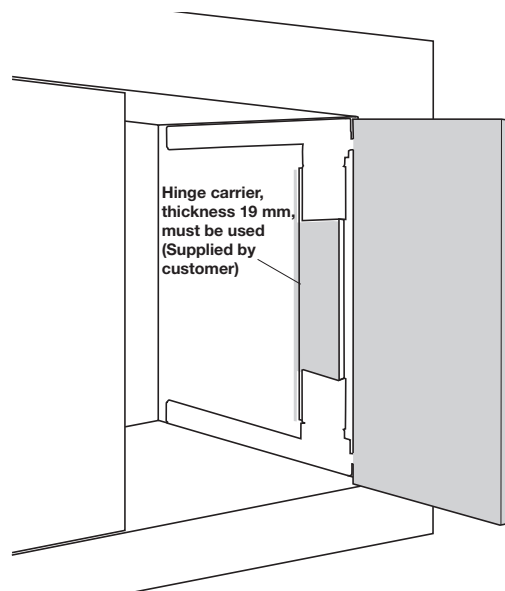



ACCURIDE 1234, HORIZONTAL OR VERTICAL

Fittings for pivot sliding cabinet doors.

- > For concealed doors, wall units and cabinets
- > For inset and overlay doors
- > For horizontal and vertical use
- > Maximum door weight 14 kg
- > Door thickness from 16-32 mm
- > Maximum door height 1100 mm
- > Maximum door width: 610 mm
- > Installed in 3 easy steps
- > Hold-out feature at maximum extension for ease of door operation

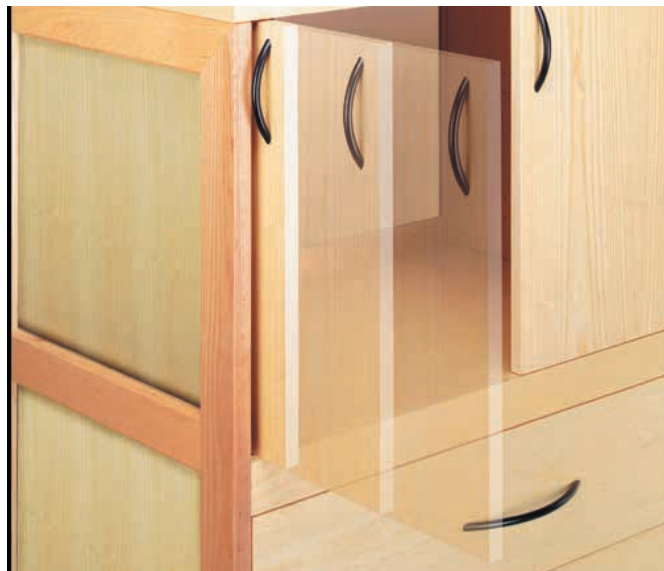

Accuride 1234 pivot sliding door runners

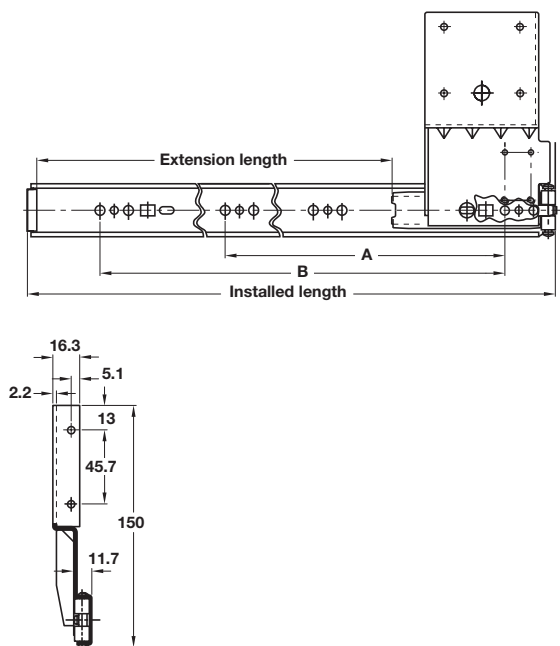


- > Black zinc-plated steel
- > Order qty: 1 pair (per door)

Installed length	Extension length	Dim. A	Dim. B
354 mm	239 mm	- 224	
405 mm	289 mm	- 320	
456 mm	340 mm	- 352	
506 mm	391 mm	- 416	
557 mm	442 mm	352	480
608 mm	493 mm	352	480



Installed length	Cat. No.
354 mm	408.35.336
405 mm	408.35.341
456 mm	408.35.346
506 mm	408.35.351
557 mm	408.35.356
608 mm	408.35.361

Grass Tiomos 110° concealed hinge, half overlay/twin mounting



Application example with 2 mm mounting plate shown - see table opposite for details

Door overlay mm							
6.5	7.5	8.5	9.5	10.5	11.5	12.5	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate distance mm			



Soft close	Finish	Screw fixing
With	Nickel-plated	348.31.802

Click-on hinge, for half overlay doors



Maximum overlay 5 mm, using a 10 mm cup to distance measurement



Mounting plate 322.85.750 (0 mm height) must be ordered separately, shown below

- > Opening angle 95°
- > 0 mm crank
- > Sprung
- > Ø 40 mm screw fixing cup with click on arm
- > Door thickness upto 36 mm. Maximum overlay 5 mm
- > Nickel-plated steel cup and zinc alloy arm
- > Order qty: 1 pc (order 2 pcs per door)



Type	Cat. No.
Without soft close	322.13.630

Super compact cruciform mounting plate



- > Hospa screw fixing, for click-on system hinges
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order qty: 1 pc



Height	Cat. No.
0 mm	322.85.750