


HAWA-MULTIFOLD 30/W FOLDING DOOR SYSTEM




High quality top hung residential and commercial applications where clear threshold without floor channel is essential e.g. walk-in wardrobes, suitable for pairs of doors only.

- > HAWA-Multifold 30/W
- > Range:
 - Max. panel weight **30 kg**
 - Max. panel height **2600 mm**
 - Panel width sizes **200-500 mm**
 - Panel thickness **19-25 mm**
- > Components accommodate either overlay (Vorfront) or inset (Infront) pairs of doors


Configuration examples

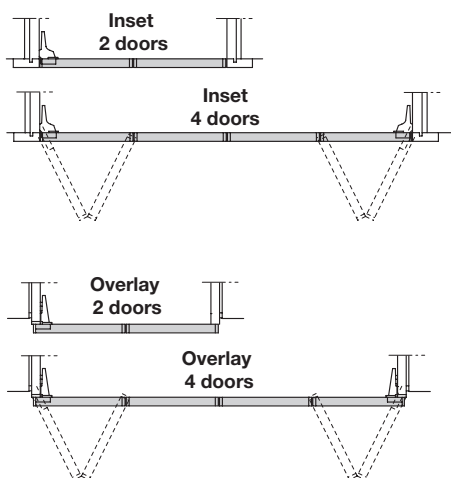

Position of hinges

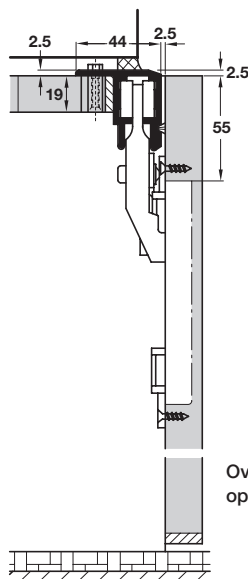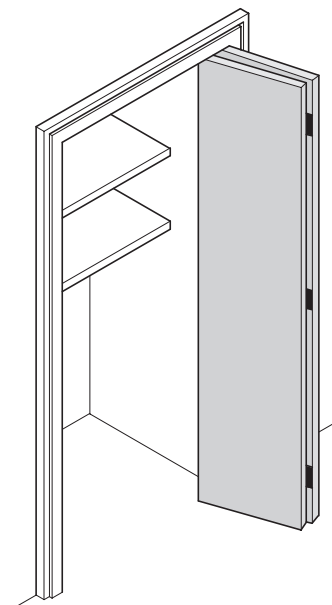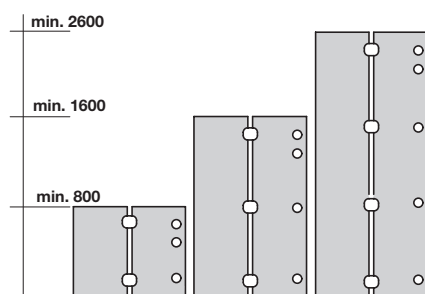


Overlay door option

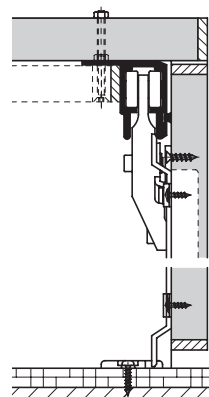

Inset door option
also showing espagnolette lock with cranked profile rod

Multifold 30/W fitting set

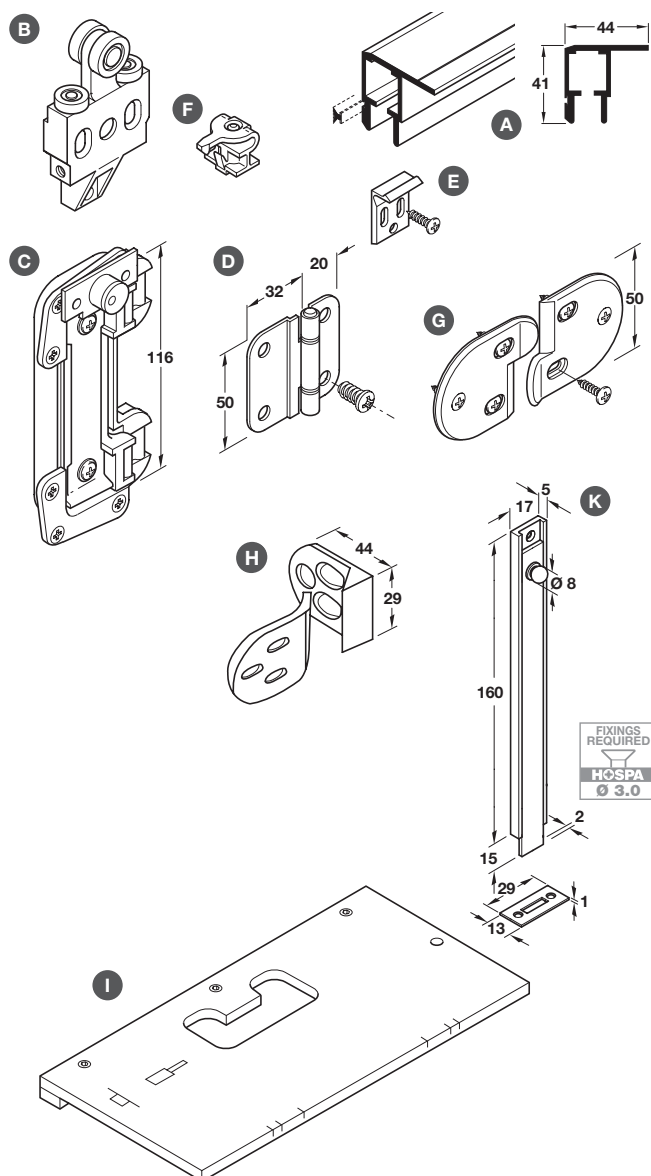

> Fitting set consists of:



- A Top track, 1.1 m length, with screw holes and brush seal, anodised aluminium
- B Trolley hanger, with stabilising rollers, steel
- C Suspension unit, black/nickel-plated
- D Centre hinge, for panel to panel joint, matt nickel-plated steel
- E Door catch, black plastic
- F Track stopper/retainer, black plastic
- G Interlocking fitting, to stabilise centre joint of 4 door applications, black plastic
- H Surface equaliser, for side wall, black plastic
- I Drilling template, for guides and suspension unit
- J Sealing profile strip, 5.0 m length, for panel to panel gap, press-fits into 2.5 mm groove, white or black rubber
- K Knob slide surface bolt, surface or semi recessed fixing to bottom of door, satin nickel-plated brass

Item	For 2 panels	
A Top track	1 length	
B Trolley hanger	1 pc	
C Suspension unit	1 pc	
D Centre hinge	4 pcs	
E Door catch	1 pc	
F Track stopper	1 pc	
G Interlocking fitting	1 pair	
H Surface equaliser	1 pc	
Cat. No.	409.52.050	
Additional fittings	Order qty	Cat. No.
D Centre hinge	1 pc	409.32.690
G Interlocking fitting	1 pair	409.50.940
I Drilling template	1 pc	409.50.990
Item	Order qty	Satin nickel-plated
K Knob slide bolt	1 pc	900.17.946

Frame to panel concealed hinges and mounting plates



Inset door option

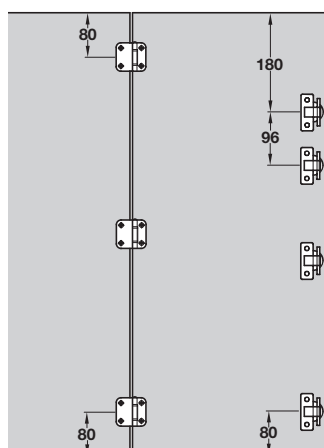

- > For inset doors:
 - > Hinge, 110° opening angle. Sprung. Click on arm. Ø 35 mm cup, screw fixing. Steel cup and zinc alloy arm
 - > Mounting plate, 8 mm height. For click on arms. For Hospa screws. Nickel-plated steel
- > For overlay doors:
 - > Hinge, 110° opening angle. Sprung. Click on arm. Ø 35 mm cup, screw fixing. Steel cup and zinc alloy arm
 - > Mounting plate, 0 mm height. For click on arms. For Hospa screws. Nickel-plated steel
 - > Refer to www.hafele.co.uk for further information on hinges and mounting plates
 - > Order qty: 1 pc

For inset doors	Cat. No.
Hinge	348.31.603
Mounting plate	348.39.512
For overlay doors	Cat. No.
Hinge	348.31.601
Mounting plate	348.38.511