


HAWA Door straightening fitting




Mill finish shown

Installation

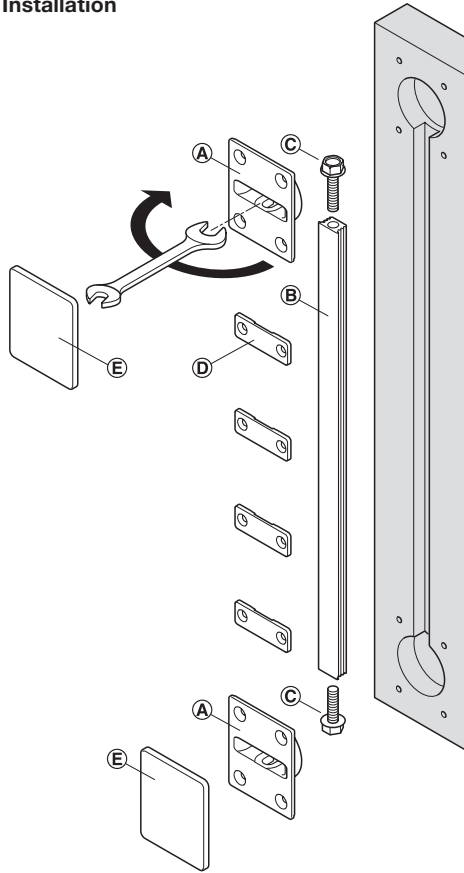

Drilling pattern

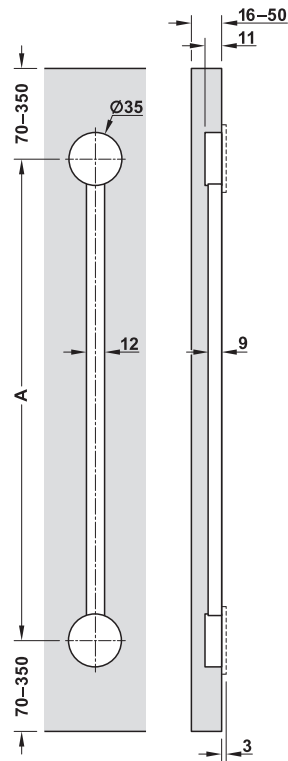

- A Tensioner top/bottom
- B Tensioning profile
- C Hex screws
- D Retaining plates (only with aluminum versions in mill finish and clear anodised)
- E Cover caps (must be ordered separately)

- > For sliding and pivoting doors
- > Prevents doors warping and/or straightens warped doors
- > Set includes 2 door alignment fittings including all components except the fastening screws for the tensioners and the retaining plates
- > Installation: Tensioning profile is recessed and screwed in place (optionally it can be glued in place)
- > Adjustment facility: Via the pre-mounted hex screws with an 10 mm open ended wrench
- > Note: Not suitable for hardwood
- > For door heights: 1715-2275 mm
- > For door thickness: 16-50 mm
- > Material: Aluminium tensioning profile, plastic tensioners
- > Finish/colour: Black anodised tensioning profile, black tensioners
- > Order qty: 1 set

Door height	Dim. A	Cat. No.
1715-2275 mm	1575 mm	408.32.902

HAWA Cover caps for door straightener fitting



- > Material: Plastic
- > Order qty: 1 pc

Colour	Black
Cat. No.	407.90.401



- > Not suitable for hardwood
- > Please note when using this product with lacquered panels a pattern of the routed recesses may emerge on the front