
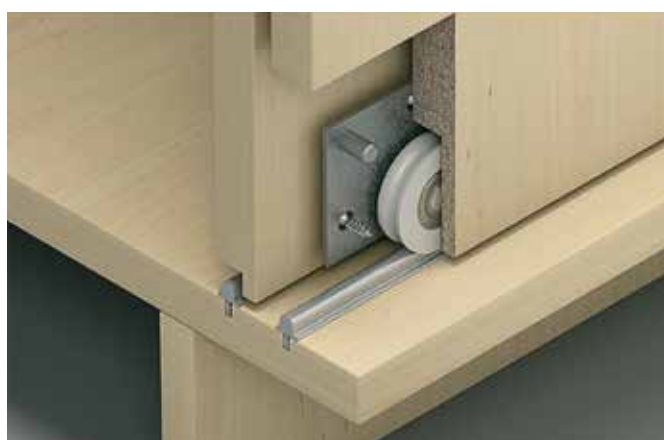



SLIDO F-LINE15 55A SLIDING DOOR SYSTEM

Bottom rolling sliding system for timber door applications up to 55 kg.

- > Slido F-Line15 55A
- > Range:
 - Max. door weight **55 kg**
 - For min. door thickness **16 mm**
- > Very good running properties due to the large guide rollers
- > Bespoke door thicknesses possible when guide tracks run separately
- > Running gear: Single roller, bottom rolling
- > Running gear guided by: Ball bearing roller, plastic, steel axle
- > Material: Steel and aluminium
- > Adjustment facility: Height ± 2 mm

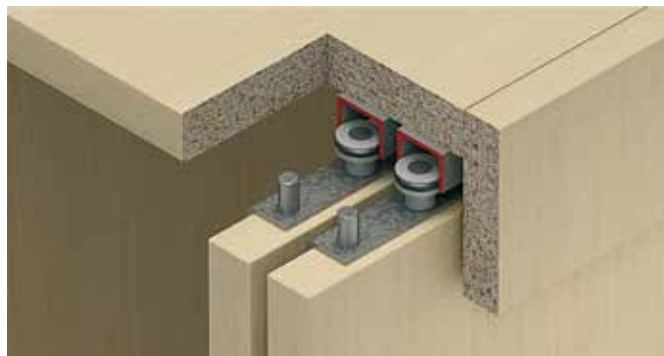

Installation dimensions

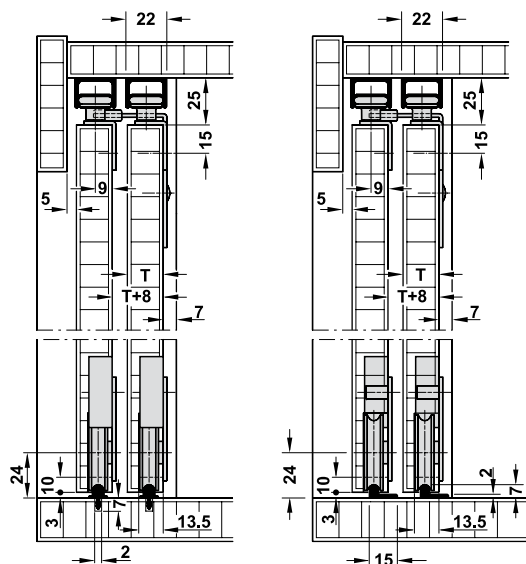


Guide track groove mounted

Guide track screw fixed

T = Door thickness

Drilling diagram

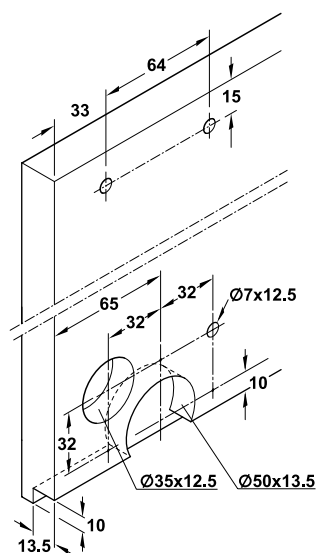

Door with height adjustment

Note

Fitting sets with height adjustment each contain drilling diagrams with and without height adjustment.

The middle door should always be drilled on the left hand side for height adjustment.


The drilling for the other doors is always on the edge of the side panel.



> Tracks and fitting sets must be ordered separately, shown on page **1.25**

> Planofit door straightening system must be used to add rigidity to wooden doors, shown on pages **1.144-147**

Slido F-Line15 55A tracks and channels

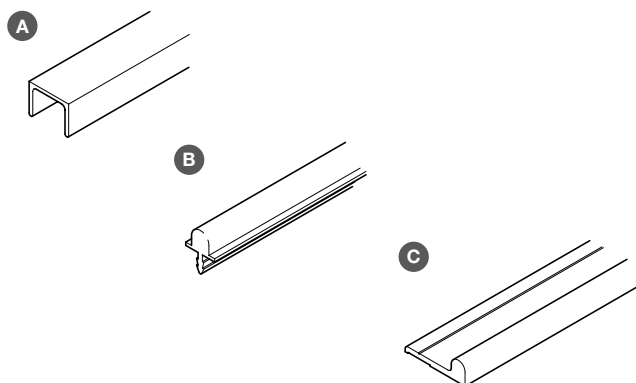


- > Order single or double tracks depending on application
- > For 16 mm board thickness
- A Top guide track, undrilled, bright aluminium
- B Bottom running track, for press fitting, ribbed, bright aluminium
- C Running and guide track, silver coloured anodised aluminium
- > Order qty: 1 pc



Length	2.5 m	3.5 m
A Top guide track	402.23.802	402.23.803
B Bottom running track	402.23.602	402.23.603
C Running and guide track	402.26.622	402.26.623

Slido F-Line15 55A fitting set, for 2 or 3 doors

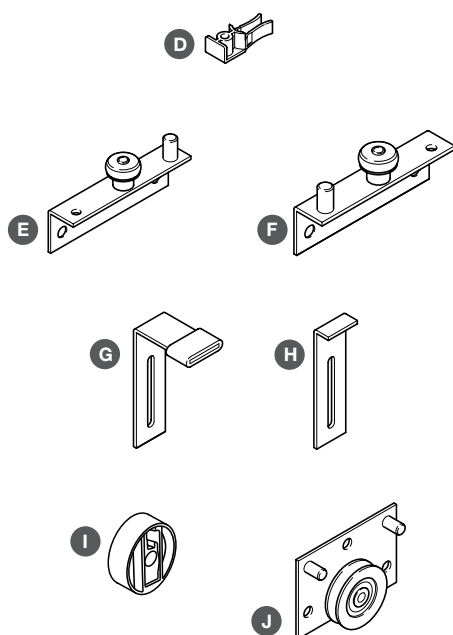

- > Fitting sets include:
- D Top door stopper, suitable for right and left hand use, for screw fixing
Consists of 1x RH, 1x LH for 2 doors or 1x LH, 2x RH for 3 doors
- E Guide, top left, for screw fixing
- F Guide, top right, for screw fixing
- G Anti-derailment device for rear door, for screw fixing, serves also as door follower
- H Anti-derailment device for front door, for screw fixing
- I Height adjustment
- J Bottom running gear, for mounting in drilled hole and screw fixing, (with height adjustment). Consists of: 1x LH, 1x RH and 1 (2) blank
- > Order qty: 1 set



Fitting set	For 2 doors	For 3 doors
D Top door stopper	2 pcs	3 pcs
E Guide, top left	2 pcs	3 pcs
F Guide, top right	2 pcs	3 pcs
G Anti-derailment device for rear door	1 pc	2 pcs
H Anti-derailment device for front door	2 pcs	4 pcs
I Height adjustment	2 pcs	3 pcs
J Bottom running gear (with height adj.)	4 (2) pcs	3 (3) pcs
Cat. No.	402.23.002	402.23.003