



SLIDO F-LINE31 60A SLIDING DOOR SYSTEM

Top hung system for overlay timber door applications up to 60 kg, optional electric drive available. Easy to assemble and disassemble. High performance soft close fitting included.

- > Slido F-Line31 60A
- > Range: Max. door weight **60 kg**
For door thickness **16-25 mm**, adjustable
- > Can be connected to an electric sliding door drive; e-drive
- > Door width:
for 1 door - min. 620 mm both sides with soft close
for 2 doors - min. 620 mm both sides with soft close
for 3 doors - min. 400 mm one side with soft close
- > Door stopper: Clip-in door stopper or top soft and self closing mechanism for insertion in guide track
- > Material: Housing, zinc alloy. Running gear, mounting plate and guide, steel
- > Running gear: top running, 2-roller
- > Running gear guided by: Ball bearing roller, plastic, steel axle
- > Adjustment facility: Height ± 2 mm on running gear using adjusting wheel
- > Installation: Guide and running gear for screw fixing to door leaf, tracks for screw fixing to cabinet outer side, optionally also to cabinet inner side

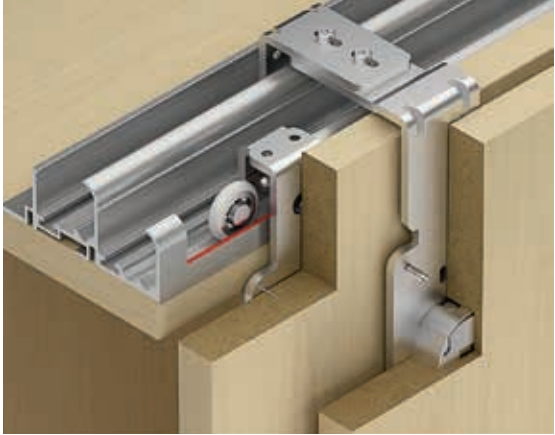


Installation dimensions

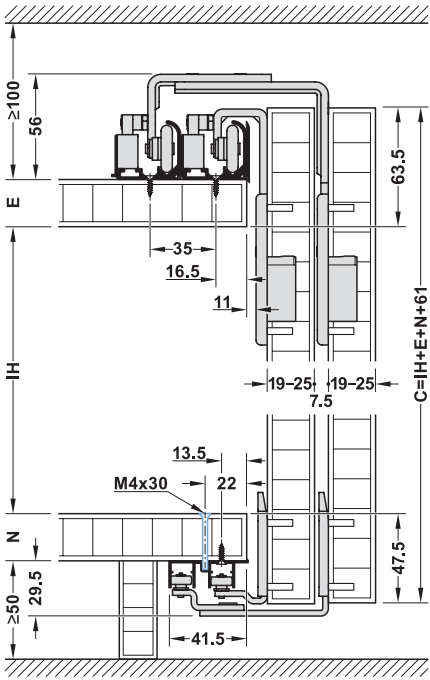

$C = IH + \text{cabinet top panel thickness} + \text{cabinet base panel thickness} + 22.5 + 38.5 \text{ mm}$

Drilling pattern

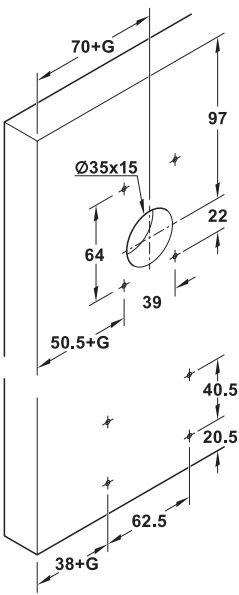

X			
0	-	-	-
1	-	-	$\geq 350 \text{ mm}$
2	$\geq 520 \text{ mm}$	$\geq 520 \text{ mm}$	$\geq 820 \text{ mm}$

G door overlap on cabinet side panel


IH inner cabinet height

C door height

E cabinet top panel thickness

N cabinet base panel thickness

Door overlap

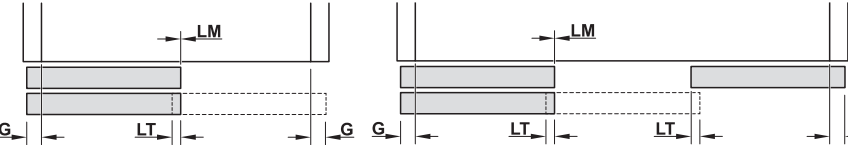


LM = door offset (0 mm)

LT = door overlap (20 mm recommended)



- > Tracks and fitting sets must be ordered separately, shown on page **1.31**
- > Planofit door straightening system must be used to add rigidity to wooden doors, shown on pages **1.144-147**

Slido F-Line31 60A tracks and channels

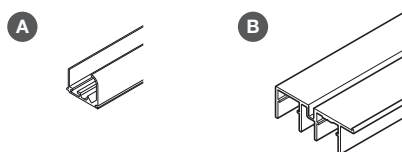


- > Order single or double tracks depending on application
- A Single top running track, pre-drilled, for screw fixing or groove mounting to cabinet top panel. Silver coloured anodised aluminium
- B Double bottom guide track, with stop strip, for screw fixing to cabinet bottom panel. Silver coloured anodised aluminium
- > Order qty: 1 pc



Two top tracks must be mounted in parallel in order to make a double running track

Length	2.5 m	3.5 m
A Single top running track	402.31.654	402.31.655
B Double bottom guide track	402.31.842	402.31.843

Slido F-Line31 60A fitting sets, for 1, 2 or 3 doors

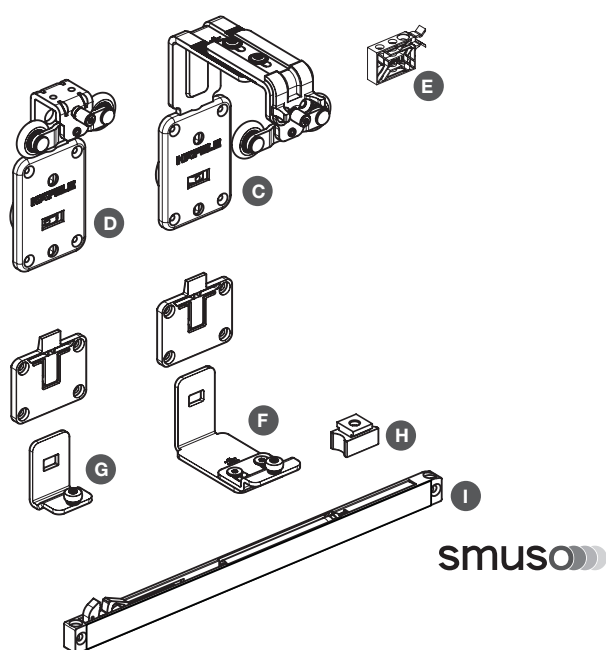

- > Fitting sets include:
- C Running gear for outer door, galvanized steel, with friction bearing, with housing for screw fixing into Ø 35 mm hole, black plastic
- D Running gear for inner door, galvanized steel, with friction bearing, with housing for screw fixing into Ø 35 mm hole, black plastic
- E Top clip-in door stopper, with retainer, black plastic
- F Bottom guide for outer door, screw fixing, galvanized steel and black plastic
- G Bottom guide for inner door, screw fixing, galvanized steel and black plastic
- H Bottom door stopper, for bottom guide track, black plastic
- I Soft and self closing mechanism (with follower for 2 and 3 doors), or sliding into top track, grey/black plastic
- > Order qty: 1 set



The middle door of a 3-door set can only be opened in one direction

Fitting set	For 1 door	For 2 doors	For 3 doors
Soft close mechanism	on both sides	on both sides	on one side
C Running gear, outer	-	2 pcs	2 pcs
D Running gear, inner	2 pcs	2 pcs	4 pcs
E Clip-in stopper	-	-	1 pc
F Bottom guide, outer	-	2 pcs	2 pcs
G Bottom guide, inner	2 pcs	2 pcs	4 pcs
H Bottom door stopper	2 pcs	4 pcs	4 pcs
I Soft close	2 pcs	4 pcs	3 pcs
Cat. No.	402.31.034	402.31.036	402.31.038