


HAWA-CLIPO 36 GPK/GPPK SLIDING GLASS DOOR SYSTEM

Inset single and double parallel sliding glass panels with frame profile, for high quality work.


- > HAWA-CLIPO 36 GPK/GPPK Inside
- > Range:
 - Max. door weight **36 kg**
 - Glass door thickness **6-8 mm**
 - Clipto 36 GPK - aluminium glass fixing frame at top only and surface fixed guide at base
 - Clipto 36 GPPK - frame at top and bottom of panel
- > Height adjustment ± 2 mm on running gear




CLIPPO 36 GPPK

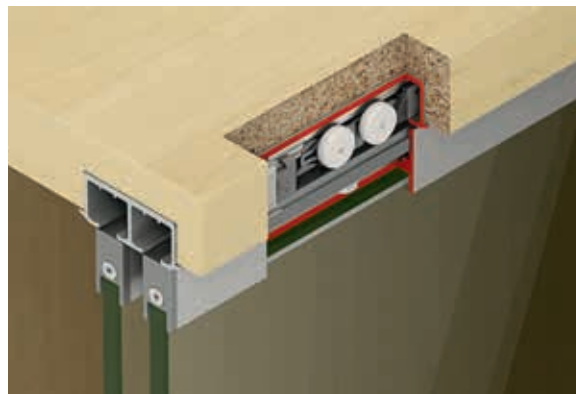


CLIPPO 36 GPK

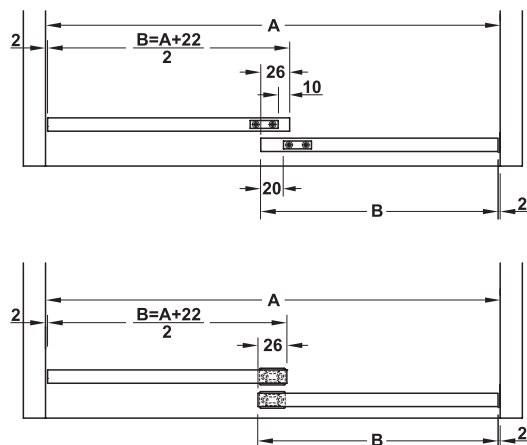

Tracks, profiles and glue are not included in the fitting set and must be ordered separately, shown on page 1.45

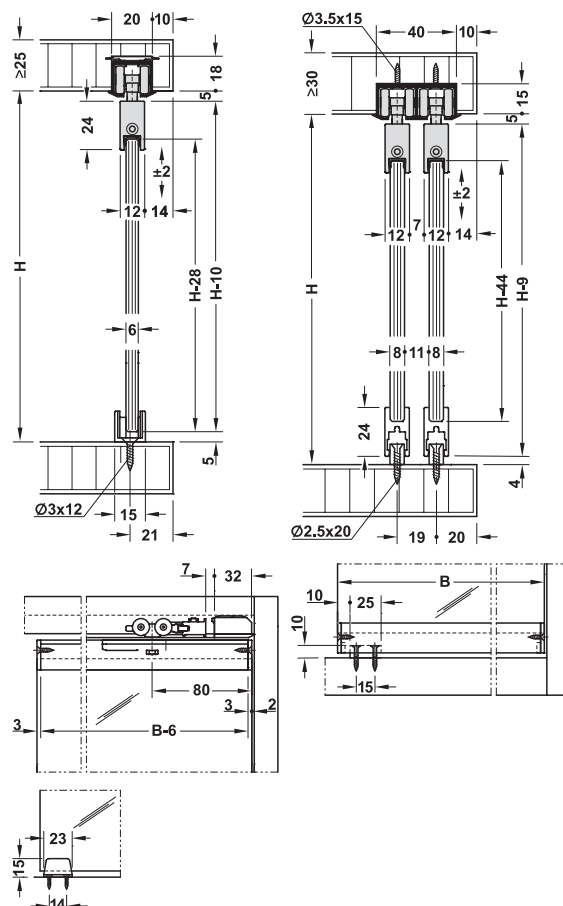

HAWA-CLIPO 36GPK and 36GPPK tracks and profiles

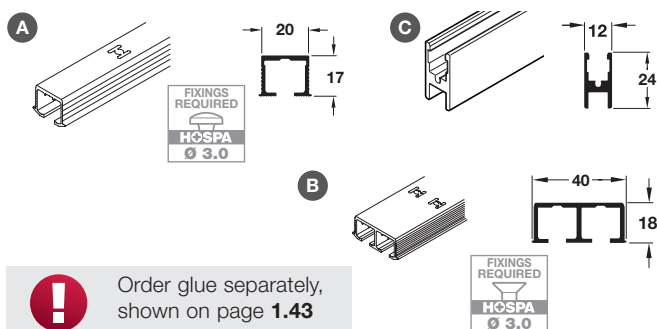

> Tracks A and B for min. 30 mm thick upper carcass

A Single top track, with screw holes for soffit fixing into a groove, bright aluminium

B Double top track, with screw holes for soffit fixing into a groove, bright aluminium

C Frame profile, glue to glass, silver anodised aluminium

Item	2.5 m	3.5 m
A Single top track	405.00.622	405.00.623
B Double top track	405.02.622	405.02.623
C Frame profile	405.03.202	405.03.203



Order glue separately, shown on page 1.43

HAWA-CLIPO 36GPK and 36GPPK end piece



> 2x End pieces, for single top track, cap to support ends of track


> Grey plastic

> Order qty: 1 pc (4 pcs required per 2 or 3 door application)


Additional items	Cat. No.
D 2x end pieces	405.00.073

HAWA-CLIPO 36GPK and 36GPPK fitting sets

EKU Clipo 36GPK



EKU Clipo 36GPPK



> Fitting set consists of:

E Spacer, for use with 6 mm glass in profile E, grey plastic

F Profile cover cap, GPPK, screw fixing to bottom profile E, zinc alloy

G Stopper, for top track, with retaining spring, grey plastic

H Running gear, ± 2 mm vertical adjustment, bright zinc alloy

I Mounting screw, M5 x 20, for fixing running gear to suspension block, galvanized steel


J Suspension block, for insertion and screw fixing in profile E, bright zinc alloy

K Bottom guide, GPK, for glass thickness 6-8 mm, screw fixing to base, matt chrome-plated aluminium

L Bottom guide, GPPK, rattle-proof, screw fixing to base for use with profile E, grey plastic

For 1 door	36GPK	36GPPK
E Spacer	2 pcs	4 pcs
F Profile cover cap, GPPK	-	2 pcs
G Stopper	2 pcs	2 pcs
H Running gear	2 pcs	2 pcs
I Mounting screw	2 pcs	2 pcs
J Suspension block	2 pcs	2 pcs
K Bottom guide, GPK	1 pc	-
L Bottom guide, GPPK	-	1 pc
Cat. No.	405.02.410	405.02.411
Additional items	Order qty	Cat. No.
F Profile cover cap, GPPK	1 pc	405.02.023

HAWA-CLIPO 36GPPK push button



Push button cylinder locks for glass panels 6-8 mm thick. Accessories: 2 keys

M Push button cylinder lock, left or right hand, keyed alike, for installation in the end of profile E, matt chrome-plated zinc alloy

> Order qty: 1 pc (order 1 pc per pair of doors)

Additional items	Cat. No.
M Push button, left hand	405.02.091
M Push button, right hand	405.02.090