


SLIDO F-LINE42 50A SLIDING DOOR SYSTEM

Good quality wardrobe system with concave running gears for excellent running characteristics, suitable for residential, commercial and industrial applications. Allows synchronized opening.

- > Slido F-Line42 50A
- > Range:
 - For door weight **20-50 kg**
 - For door thickness **16-22 mm**
- > Fitting instructions included
- > Soft close Smuso, for 18-21 mm door thickness shown on page **24D** (for two door fitting set only)


Track stopper installation

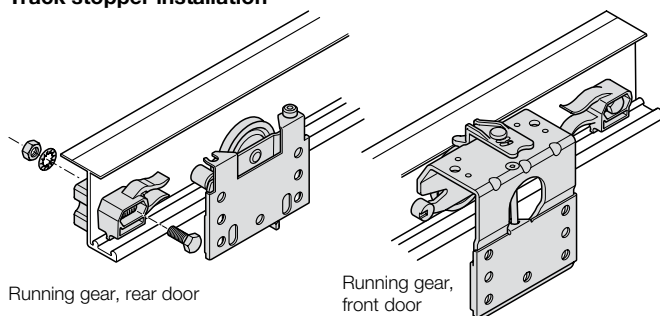

Running gear, rear door

Running gear, front door


Drilling pattern

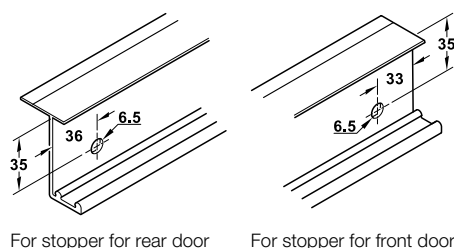

For stopper for rear door

For stopper for front door

Door overlap

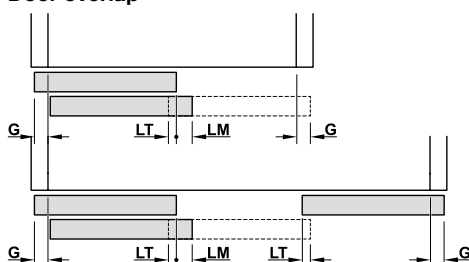


LM = door offset (30 mm)

LT = door overlap (20 mm recommended)

G = door overlap on cabinet side panel

Drilling pattern

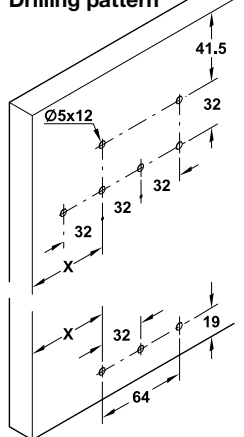

$$X = G + 51 \text{ mm}$$

Fixing options for double bottom guide track:

- > Screw fixing from outside
- > Fixing with screws from inside the cabinet using screw channel

C = door height

IH = internal cabinet height

E = cabinet top panel thickness
(16-20 mm)

N = cabinet base panel thickness


Calculation

$$C = IH + E + N + 24 \text{ mm}$$


* when using e-drive



Installation dimensions

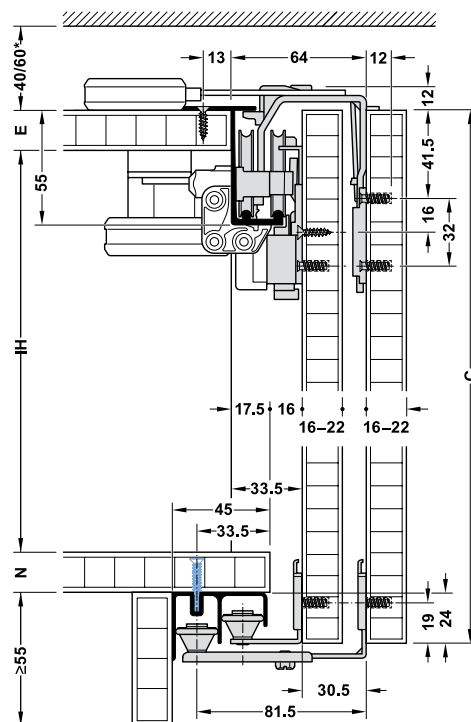

Slido F-Line42 50A tracks and spacer



> Order tracks and spacer separately


A Double top running track, for screw fixing, silver coloured anodised aluminium

B Double bottom running track, for screw fixing, silver coloured anodised aluminium



Item	2.5 m	3.5 m
A Double top running track	400.52.962	400.52.963
B Double bottom running track	400.52.954	400.52.955

Slido F-Line42 50A fitting set for 2 or 3 doors

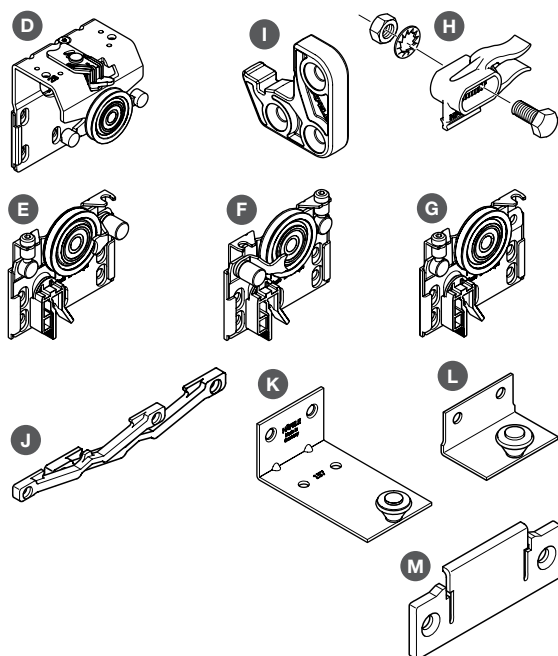

> Fitting set includes:

D Running gear, for outer door, plastic roller with ball bearing, with pre-mounted anti-derailment device, galvanized steel

E Running gear, left hand, for inner door, with bolt, plastic roller with ball bearing, galvanized steel

F Running gear, right hand, for inner door, with bolt, plastic roller with ball bearing, galvanized steel

G Running gear, for inner door, without bolt, plastic roller with ball bearing, galvanized steel

H Track stopper, for mounting in double top running track, grey plastic

I Stabilising block, for double top running track, grey plastic

J Centre door stopper, grey plastic

K Bottom guide, for outer door, with plastic guide, galvanized steel

L Bottom guide, for inner door, with plastic guide, galvanized steel

M Clip for bottom guide, plastic

> Order qty: 1 set



Fitting set	For 2 doors	For 3 doors
Soft close	Without soft close Clip-in door stopper	Without soft close Clip-in door stopper
D Running gear, for outer door	2 pcs	2 pcs
E Running gear, left, for inner door	1 pc	1 pc
F Running gear, right, for inner door	-	1 pc
G Running gear, for inner door	1 pc	2 pcs
H Track stopper	2 pcs	2 pcs
I Stabilising block	2 pcs	2 pcs
J Centre door stopper	-	1 pc
K Bottom guide, for outer door	2 pcs	2 pcs
L Bottom guide, for inner doors	2 pcs	2 pcs
M Clip for bottom guide	4 pcs	6 pcs
For 16-22 mm door thickness	400.51.532	400.51.533