




SLIDO F-HANDLE26 HANDLE PROFILE SYSTEM

1


Handle profile system in 3 finishes with optional lighting and straightening fitting.

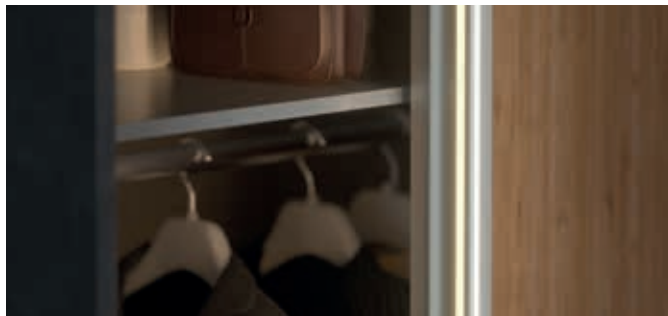

Vorfront

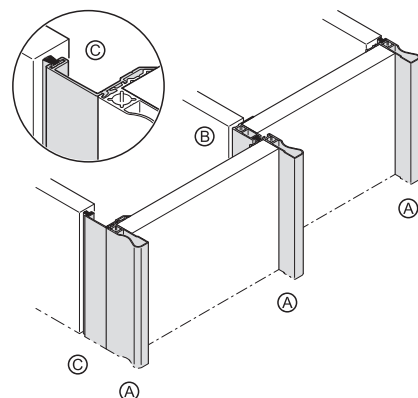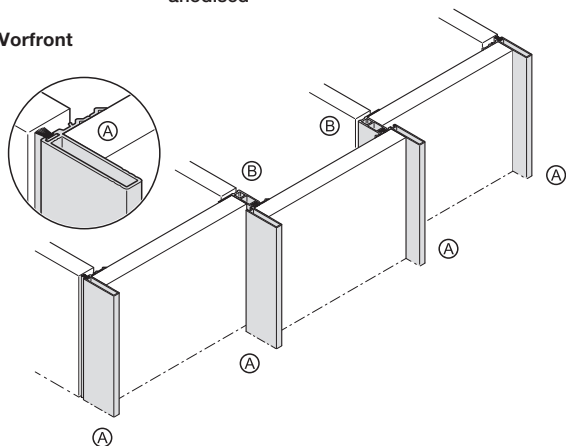


Infront

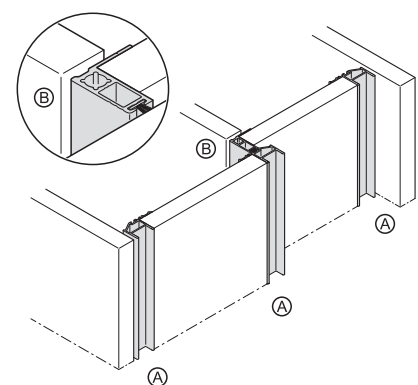

- > With optional lighting and straightening fitting in the profile
- > Numerous profile designs in 3 colours
- > For Vorfront and Infront solutions
- > For door thicknesses from 16–25 mm
- > Versions for Loox LED lighting, including motion sensor and power supply with battery compartment
- > Option of integrating a straightening fitting in the handle profile
- > T-groove for brush seal

Model A - Handle profile

- > For Infront and Vorfront solutions
- > Door thickness: 16 – 25 mm
- > T-groove for brush seal
- > With optional profile chamber for straightening fitting
- > Different design variants




Model B - Strengthening profile

- > For Infront and Vorfront solutions
- > Door thickness: 18 – 25 mm
- > T-groove for brush seal
- > With optional profile chamber for straightening fitting




Model C - Spacer profile

- > For Vorfront solutions, outer door leaf
- > As supplement to model A
- > In 2 spacer versions
- > T-groove for brush seal




Straightening fitting

- > For inserting into the handle profile
- > For chipboard up to 25 mm
- > Length individually adjustable
- > Can be retrofitted




LED lighting

- > Optimum cabinet lighting
- > With motion sensor
- > Supply unit with battery compartment at the front-rear



Brush seal


- > Can be cut to size
- > In different thicknesses
- > In grey and black



Installation

- > Pre-drilled with recesses for screw heads
- > Snap-in profile for connecting handle profiles A to spacer profiles C


Häfele Slido F-Handle26 A1 handle profile

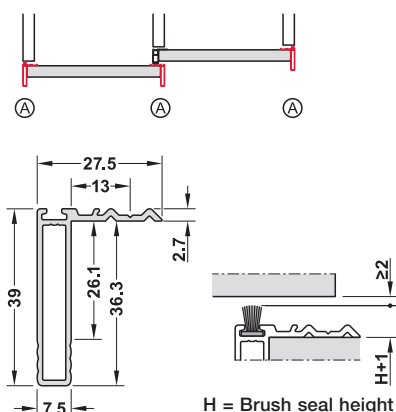

- > Model: A1
- > Area of application: For Vorfront
- > For door thickness: 16 – 25 mm
- > Version: With holder for brush seal with foot width 4.8 mm
- > Material: Aluminium
- > Installation: For screw fixing
- > Hole spacing: 250 mm
- > Length: 2500 mm
- > Order qty: 1 pc

Colour/finish	Cat. No.
Silver coloured, anodised	400.04.400
Black, powder coated	400.04.401
Stainless steel coloured, anodised	400.04.402




Häfele Slido F-Handle26 A2 handle profile

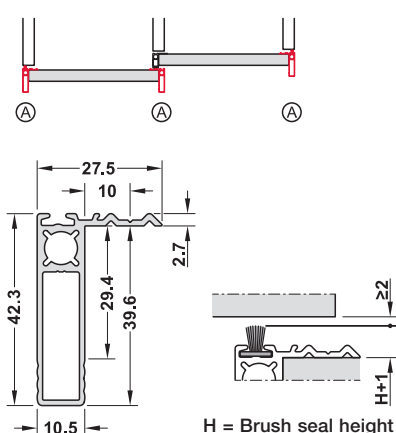

- > Model: A2
- > Area of application: For Vorfront
- > For door thickness: 16 – 25 mm
- > Version: With holder for brush seal with foot width 6.9 mm
- > Material: Aluminium
- > Installation: For screw fixing
- > Hole spacing: 250 mm
- > Length: 2500 mm
- > Order qty: 1 pc

Colour/finish	Cat. No.
Silver coloured, anodised	400.04.403
Black, powder coated	400.04.404
Stainless steel coloured, anodised	400.04.405

Häfele Slido F-Handle26 A3 handle profile

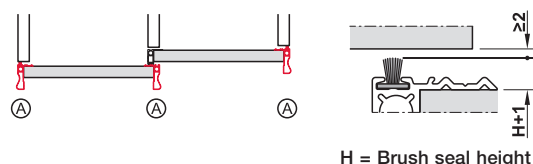

- > Model: A3 and A3 LED
- > Area of application: For Vorfront
- > For door thickness: 16 – 25 mm
- > Version: With and without diffuser for LED,
With holder for straightening fitting,
With holder for brush seal with foot width 6.9 mm
- > Material: Profile: Aluminium, Diffuser: Plastic
- > Installation: For screw fixing
- > Hole spacing: 250 mm
- > Length: 2500 mm
- > Order qty: 1 pc



A distance between the brush seal and the opposite door leaf or side panel of at least 2 mm must be observed. A smaller distance may interfere with the functionality of the sliding door system

Colour/finish	Cat. No.
Model: A3	
Silver coloured, anodised	400.04.406
Black, powder coated	400.04.407
Stainless steel coloured, anodised	400.04.408
Model: A3 LED including diffuser	
Silver coloured, anodised	400.04.409
Black, powder coated	400.04.410
Stainless steel coloured, anodised	400.04.411