



Häfele Slido F-Handle26 B strengthening strip



- > Model: B
- > Area of application: For Infront and Vorfront
- > Version: With holder for straightening fitting, With holder for brush seal with foot width 6.9 mm
- > For door thickness: 18 – 25 mm
- > Material: Aluminium
- > Installation: For screw fixing
- > Hole spacing: 250 mm
- > Length: 2500 mm
- > Order qty: 1 pc

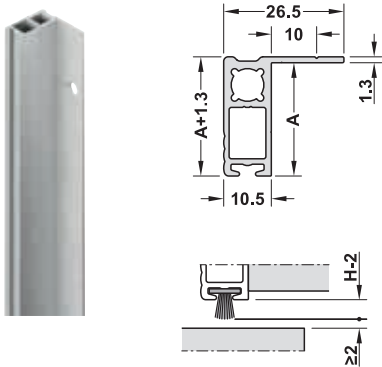


A = Depth
H = Brush seal height




A distance between the brush seal and the opposite door leaf or side panel of at least 2 mm must be observed. A smaller distance may interfere with the functionality of the sliding door system

Depth	For door thickness	Area of application	Silver coloured, anodised	Black, powder coated	Stainless steel coloured, anodised
19 mm	18-20 mm	For Vorfront, for Infront (door thickness ≤19 mm)	400.04.421	400.04.422	400.04.423
22 mm	20-23 mm	For Vorfront	-	400.04.425	400.04.426
25 mm	23-25 mm	For Vorfront	400.04.427	400.04.428	400.04.429

Häfele Slido F-Handle26 C spacer profile



- > Model: C
- > Area of application: For Vorfront, For covering the distance of outer door to the cabinet
- > Version: With holder for brush seal with foot width 6.9 mm
- > Material: Aluminium
- > Installation: For clipping into the T-groove of the Slido F-Handle26 A handle profile
- > Hole spacing: 250 mm
- > Length: 2500 mm
- > Order qty: 1 pc

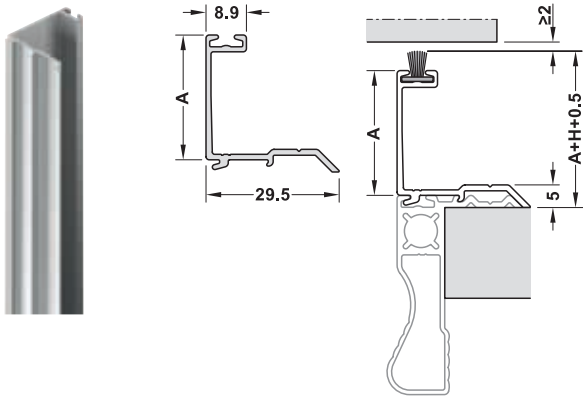

A = Depth
H = Brush seal height



A distance between the brush seal and the opposite door leaf or side panel of at least 2 mm must be observed. A smaller distance may interfere with the functionality of the sliding door system

Colour/finish	Distance A	
	27.5 mm	33.0 mm
Silver coloured, anodised	400.04.430	400.04.433
Black, powder coated	400.04.431	400.04.434
Stainless steel coloured, anodised	400.04.432	400.04.435