


Brush seal




- > Area of application: For sliding doors, for protecting the inside of the cabinet from dust
- > Material: Artificial hair
- > Installation: For inserting into T-groove of F-Handle26 handle profiles
- > Length: 2500 mm
- > Order qty: 1 pc

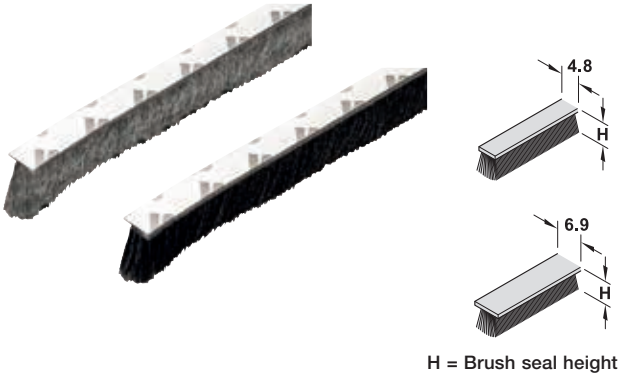

A distance between the brush and the opposite door leaf or side panel of at least 2 mm must be observed. A smaller distance may interfere with the functionality of the sliding door system

Width	Height	Telegrey, similar to RAL 7045	Black
Suitable for Slido F-Handle26 A1 handle profiles			
4.8 mm	6 mm	403.54.504	400.58.121
4.8 mm	9 mm	403.54.505	400.58.122
4.8 mm	12 mm	400.58.120	400.58.123
Suitable for Slido F-Handle26 A2, A3, A6, A7 handle profiles, Slido F-Handle26 B strengthening profile, Slido F-Handle26 C spacer profile			
6.9 mm	6 mm	403.54.501	400.58.117
6.9 mm	9 mm	403.54.502	400.58.118
6.9 mm	12 mm	403.54.503	400.58.119

Häfele Slido F-Handle26 straightening fitting


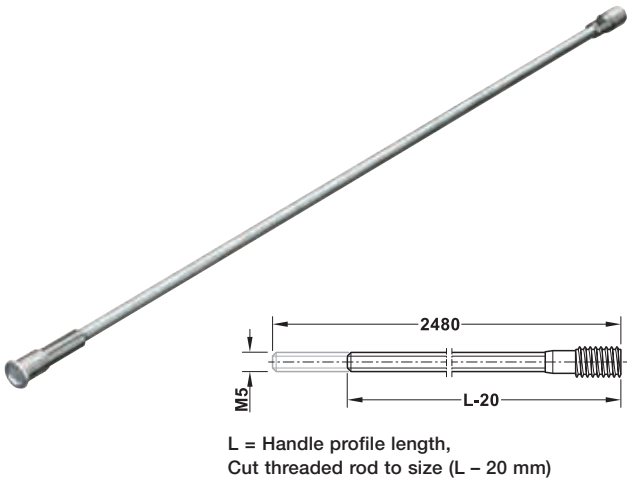


- > Area of application: In combination with Slido F-Handle26 A handle profiles, for hinged and sliding doors, prevents doors warping in either direction or straightens door leaves which have become warped
- > For door thickness: 16 – 25 mm
- > For door width: ≤1,250 mm
- > Material: Threaded bar and threaded sleeves: Steel
- > Installation: For inserting into the slots in the profile provided for this purpose
- > Functioning principle: The door leaf is aligned by tightening the threaded bar in the handle profile
- > Adjustment facility: With SW4 hex key
- > Supplied with:
 - 2 threaded bars, M5, with threaded sleeve M5/M8
 - 2 threaded nuts M5/M8 mounting accessories
- > Order qty: 1 set




Order reference: 2 straightening fittings (1 set) recommended per door leaf

For door height	Cat. No.
1000-2500 mm	400.04.000

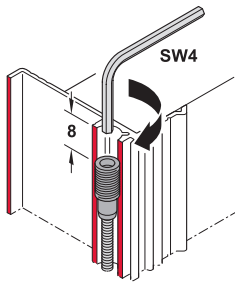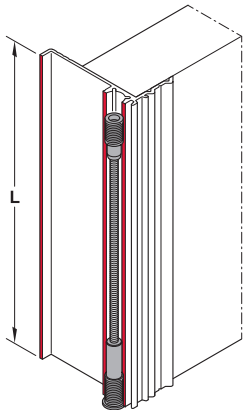

Zero position of threaded nut recessed approx. 8 mm in profile

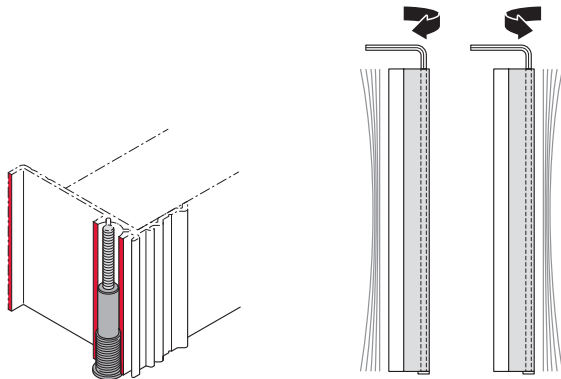

The door leaf can be straightened in both directions by turning the threaded sleeve with the hex key SW4