
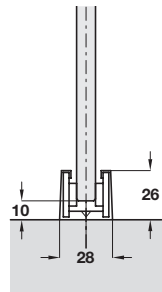
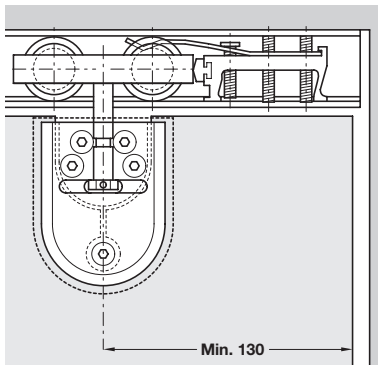


HAWA-JUNIOR 80/GP SLIDING GLASS DOOR SYSTEM


Version of HAWA-Junior 80/GL system where headroom is limited. Suspension patch fitting units with decorative face plates. Normally recommended for residential or light duty commercial applications.

- > HAWA-Junior 80/GP
- > Range:
 - Max. door weight **80 kg**
 - Glass thickness **8-12.7 mm** (toughened or laminated)
 - Max. door height **2200 mm**
- > Top of glass panel close to underside of top track
- > Height adjustment facility after installation, ± 3 mm
- > Choice of bottom control - either clear threshold or floor channel to provide added stability for wider doors



 Satin stainless steel effect finish also available, please contact us for more information

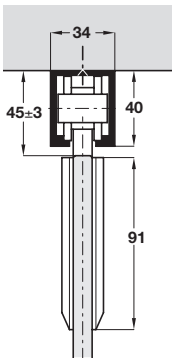

Bottom guiding with guide, without channel; page 2.45

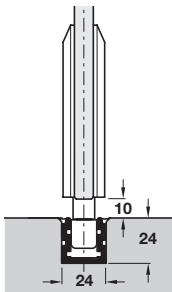


Bottom guiding with patch assembly; page 2.47

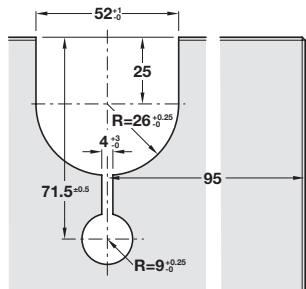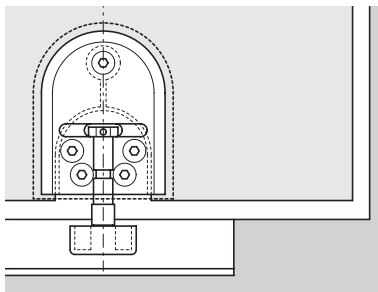

Glass cut-out detail

 Tracks and fitting sets must be ordered separately, shown below and on page 2.47

HAWA-Junior 80 tracks




 Top track side fixing profile is available, shown on page 2.56

- > Pre-drilled for mounting screws
- > Two top tracks are mounted side by side for double or multiple doors
- > Silver anodised aluminium
- > Order qty: 1 pc

Length	2.0 m	2.5 m	3.0 m
Cat. No.	940.80.200	940.80.250	940.80.300



HAWA-Junior 80/GP fitting set

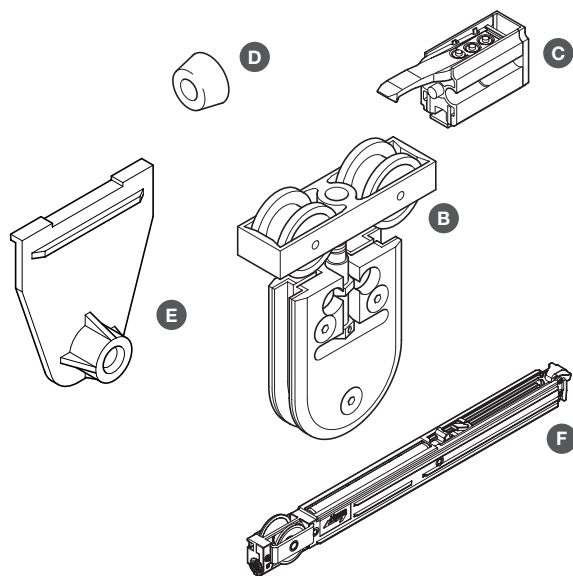

> Fitting set for one door includes:

B Trolley hanger, Ø 34 mm tandem rollers, comprises trolley with M10 suspension bolt and patch suspension unit for clamping glass panel

C Track stopper, for adjustable mounting in top track, zinc alloy

D Rubber buffer, Ø 20 x 10 mm, screw fixing

E Glass panel drilling jig, to drill correct aperture in glass door panel to fit patch assembly, with drilling bush

F HAWA-SoftMove 80, 24 x 336 x 30 mm


> Order qty: 1 set



SoftMove 80 for HAWA-Junior 80, full details shown on page 2.16

Fitting set for 1 door	With SoftMove
B Trolley hanger	2 pcs
C Track stopper	2 pcs
D Rubber buffer	1 pc
E Drilling jig	1 pc
F SoftMove 80	1 pc
Cat. No.	940.80.110
Additional items	
Item D	407.01.930
Item F	940.80.046

HAWA-Junior 40, 80, 120 and 160/GP bottom guiding accessories and patch assembly cover plates



G Patch assembly cover plates

> Set comprises 4 rounded plates, plastic

> Order qty: 1 set

H Patch fitting

> For clamping of bottom guide to glass panel

> Order qty: 1 set (2 sets required per panel)

I Bottom guide

> For fitting to patch fitting, to keep glass door panel aligned correctly, with nylon pilot

> Order qty: 1 pc (2 pcs required per panel)

J Channel

> Pre-drilled for countersunk screws, anodised aluminium


> Order qty: 1 pc



Cover plates G:

1 set per panel required if clear threshold bottom guiding is used

2 sets per panel required if bottom guide channel is used

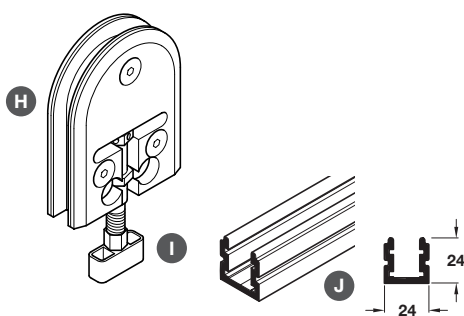

Patch assembly cover plates	Cat. No.
Item G	
Satin chrome	940.40.027
Stainless steel	940.40.023
Patch fitting	
Item H	940.40.026
Bottom guide	
Item I	940.40.035
Channel	2.5 m 3.5 m
Item J	940.81.250 940.81.350



Alternative bottom guide control options also available, shown on page 2.45;

For clear threshold where no floor channel is possible, or alternative continuous guiding where floor channel is permitted



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.