



HAWA-JUNIOR 80/GL AND 80/GP WITH FIXED GLASS PANEL

For wherever rooms need closing with unobtrusive, reliable all glass sliding doors at optimum price/performance, e.g. in hotels, restaurants, conference rooms, airports, office buildings or private residential interior and outdoor applications.



- > HAWA-Junior 80/GL and 80/GP with fixed glass
- > Fixed glass panel is positioned into retainer part of top track A shown below. No glass cut outs or additional hardware required
- > Retainer profile for wall and floor fitting provides sufficient stability.
- > Rubber profile or silicone groove holds the glass in position and prevents humidity seeping between glass and track
- > Easy fitting of fixed glass panel:
 - 1.Slide glass into retainer part of top track A
 - 2.Position the glass on the spacing block in the bottom profile Cand/or
 - 3.Slide sideways into wall profile C
 - 4.Clip cover profile B into retainer part of top track A for walk-through area
 - 5.Seal fixed glass with either rubber profile D or silicone provided by customer

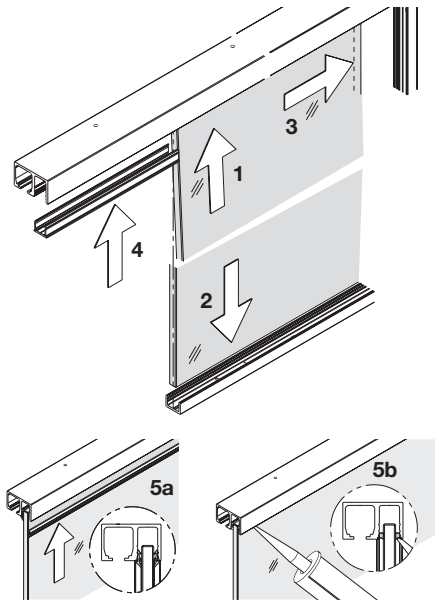

HAWA-Junior 80/GL with fixed glass

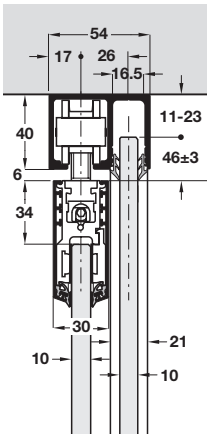


HAWA-Junior 80/GP with fixed glass

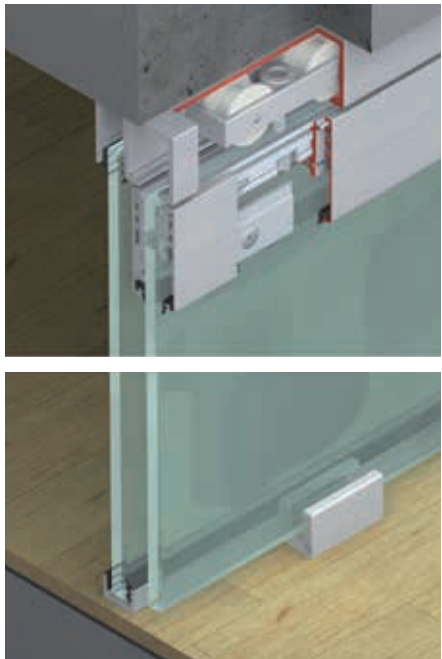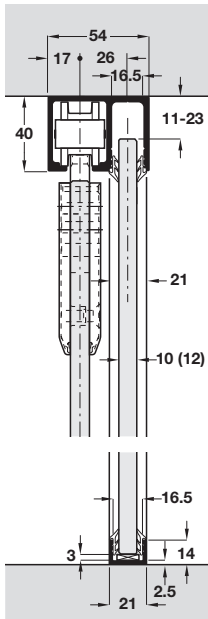

HAWA-Junior 80/GL or 80/GP tracks and fitting sets must be ordered separately, shown on pages 2.44-47

Top track and cover profile for fixed glass panel

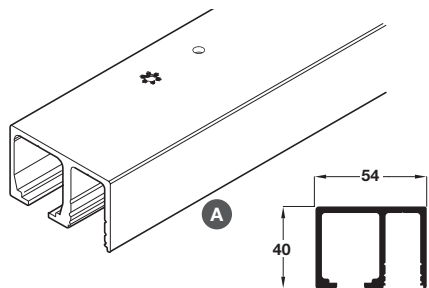


- > A Top track
- > With integrated retainer for fixed glass, with screw holes
- > Aluminium
- > Order qty: 1 pc



Top track	3.5 m
Item A	940.80.356

Bottom/wall profiles and glass retainer

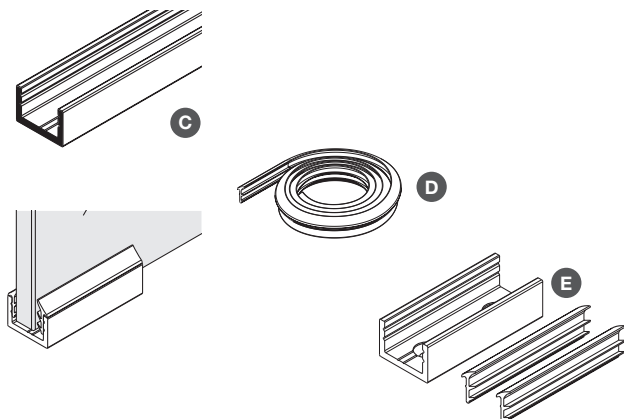

C Bottom/wall profile, with screw holes, silver anodised aluminium

> Order qty: 1 pc

D Rubber profile, black


> Order qty: 1 roll

E Bottom/wall glass retainer, with screw holes and rubber profile, silver anodised aluminium, 50 mm

> Order qty: 1 pc

Bottom/wall profile	3.5 m
Item C	940.41.535
Rubber profile	10 m
Item D	940.41.053
Bottom/wall glass retainer	Silver anodised
Item E	940.41.054 

Centring door stop, with wall profile and rubber seal



F Wall profile, undrilled, silver anodised aluminium

> Order qty: 1 pc

G Rubber seal, for use with profile F, black rubber

> Order qty: 1 pc

Wall profile	2.5 m	3.5 m
Item F	941.24.925 	941.24.935 
Rubber seal	2.5 m	3.5 m
Item G	941.24.081 	-

Alternative centring door stop




> Wall fixing

> Grey plastic

> Order qty: 1 pc (2 pcs required per panel)

	Cat. No.
Centring door stop	941.24.042 

Rubber profile



> For vertical glass edge protection - recommended for glass doors that can strike against one another

> Self adhesive, black

> Order qty: 1 roll



Longer lengths of rubber profile and transparent version also available on request

Length	5.0 m
For 8/10 mm glass thickness	404.95.321



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.