


HAWA JUNIOR 80 B POCKET SLIDING DOOR SYSTEM


Junior 80 B system for wall pocket installation. Height adjustable.

2


- > HAWA-Junior 80 B
- > Application: For 1-leaf sliding doors for wall pocket installation
- > Range:
 - Max. door weight **80 kg**
 - Door width **1500 mm**
 - Door thickness **35-80 mm**
- > Adjustment facility: Door height adjustable +3 mm, with integrated anti-twist protection, horizontal adjusting distance in lengthways direction in bayonet mount ± 8 mm
- > Version: Min. installation height, vibration transmission (structure-born sound) reduced by a separation layer between running track and fixing profile
- > Installation: Suspension with recessed support and integrated suspension carriage, easy insertion of the door into the construction, clear threshold running installation in pre-mounted fixing profile using bayonet lock with insertion slope
- > Disassembly: Running track up to 3 m can also be removed in fixed pocket constructions, this allows replacing or retrofitting individual components at any time
- > Available with 20 mm longer bolt version which allows the track to be covered from below with removable ceiling elements
- > Optional: Spring buffer for convenient ejection of the door
- > Optional: Hawa-SoftMove 80 soft and self closing mechanism (SoftMove 80 cannot be used in combination with spring buffer)

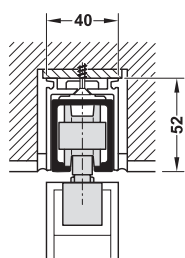


Integrated ceiling installation

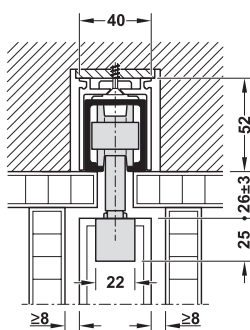

Integrated ceiling installation with long hanger bolt (+20 mm)






Without guide track




With guide track


Installation

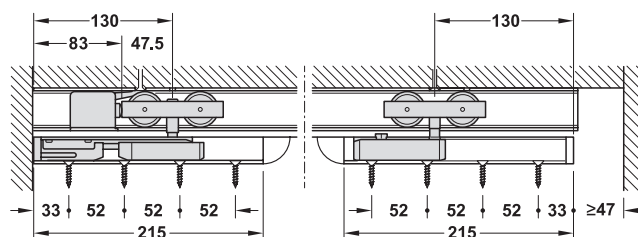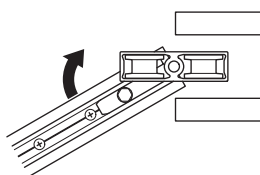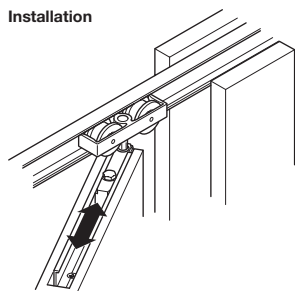


Section trolley hanger

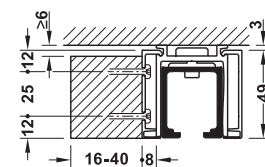

Panel with material thickness of up to 40 mm can be installed



For use without spring buffer




For use with spring buffer

Door width calculation:
Internal opening width + P1 + 30 mm




Swivelling door into the pocket

Running track installation in fixing profile

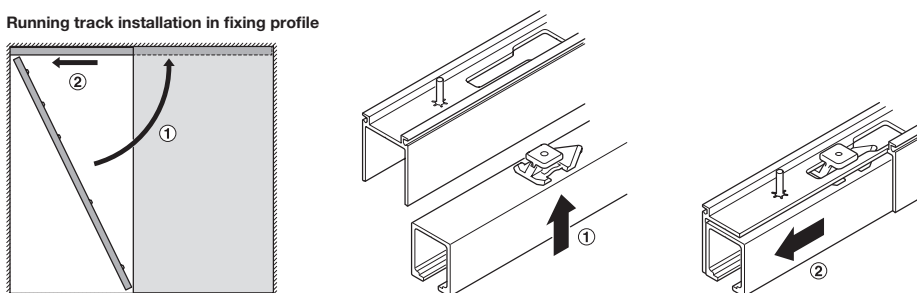

HAWA-Junior 80 tracks

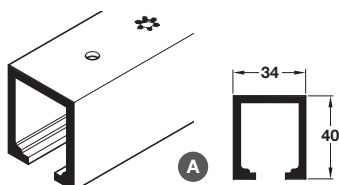


- > With screw holes for soffit fixing
- > Silver anodised aluminium
- > Order qty: 1 pc



Length	2.0 m	2.5 m	3.0 m
Cat. No.	940.80.200	940.80.250	940.80.300


HAWA-Junior 80 mounting profile



- > Mounting profile for running rail with Bayonet lock
- > Can be shortened to the respective rail length
- > Includes mounting set
- > Silver anodised aluminium
- > Order qty: 1 pc

Length	2500 mm	3000 mm
Cat. No.	940.80.421	940.80.422

HAWA-Junior 80 B pocket fitting set

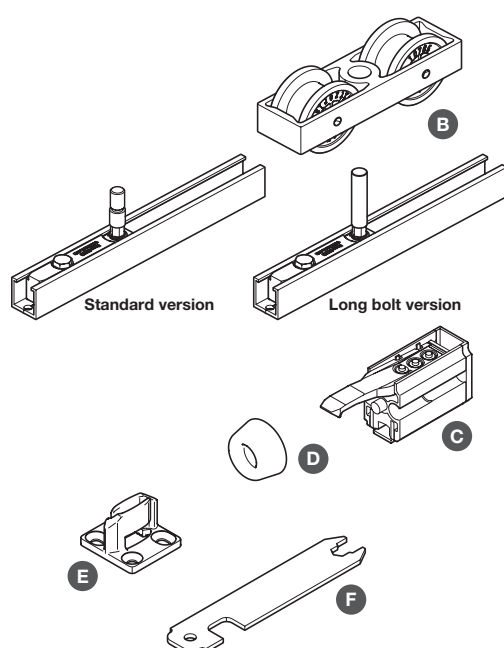

- > Fitting set for 1 door includes:
 - B Running gear (2 rollers) with support profile, suspension carriage and hanger bolt M10
 - C Door stopper, clip-on, with retainer
 - D Wall buffer
 - E Floor guide, clear threshold, for groove width 10 mm
 - F Spanner for suspension carriage
- > Order qty: 1 set



A second track buffer (940.80.040) is required when the soft and self closing mechanism and spring buffer are not being used

Fitting set for 1 door	Junior 80/B Pocket	
	Standard version	Long bolt version
B Running gear	2 pcs	2 pcs
C Door stopper	1 pc	1 pc
D Wall buffer	1 pc	1 pc
E Floor guide	1 pc	1 pc
F Spanner	1 pc	1 pc
Cat. No.	940.80.014	940.80.120
Additional items		
Item C	941.04.300	