

HÄFELE OPTIMO POCKET DOOR SYSTEM WITH FD 30 OPTION

High quality straight sliding pocket door system for residential and commercial applications. Visual continuity thanks to its minimal visual impact in the space.



- > Supplied in flat packed format (2230 x 200 x 130 mm) for ease of handling and storage, comes complete with an internal timber jamb finishing set
- > Range:
 - Max. door weight: **90 kg** (with or without soft close)
 - Min/max. door height: **1981/2040 mm**
 - Max. door width **1026 mm**
 - Standard pocket set: max. **44 mm**
- > FD30 pocket set: only for use with 44mm timber doors (not supplied)
- > FD30: only for 125 mm finished wall with 100 mm frame
- > Notes on handle installation for FD30 (order handles separately):
 - Flush pull must be Ø 56 mm and 12 mm deep
 - Adhere intumescent to the Ø 46 mm back plate of the flush pull at 2.5 mm depth
 - Available for both finished walls 100 mm (frame 75 mm) and 125 mm (frame 100 mm), only used for 125 mm as we need to widen pocket
- > Fully certified to BS EN 1634 -1:2014 +A1:2018 Part 1
- > Intumescent strips included



- > Additional items to order separately, as required;
 - Jamb kits (architraves), shown on **2.74**
 - Soft close mechanism, self closing set, accessories set, shown below
 - FD30 jamb kit Cat. No. 940.99.015 and self close kit Cat. No. 940.99.312 must be added and used to be FD30 compliant

Optimo soft close mechanism



- > For max. door weight 90 kg
- > Min. door width: 600 mm (x1 soft) 825 mm (x2 soft)
- > Add 1x for single door, 2x for double doors
- > Order qty: 1 pc



15 Year Warranty

Cat. No.	
Soft close mechanism	940.99.313

Optimo self closing set



- > For use with Optimo sets for self closing doors
- > For max. door weight 90 kg
- > The set contains two different weights so that the self close can be adjusted to 45 or 90 kg depending on the weight of the door.
- > FD30 fire rated, only when FR doors and jamb kits used
- > Order qty: 1 set

15 Year Warranty

Cat. No.	
Self-closing set	940.99.312

Optimo additional accessories set




- > Included in Optimo sets, for 1 single door
- > Set includes:
 - 2x Rollers (90kg) with fixings
 - 2x Fixing plates, surface mounted
 - 2x End stoppers
 - 1x Bottom guide with fixings
 - 1x Fixing/adjusting key
- > Order qty: 1 set

15 Year Warranty

Cat. No.	
Replacement accessories set	940.99.403

Optimo sliding door fitting set

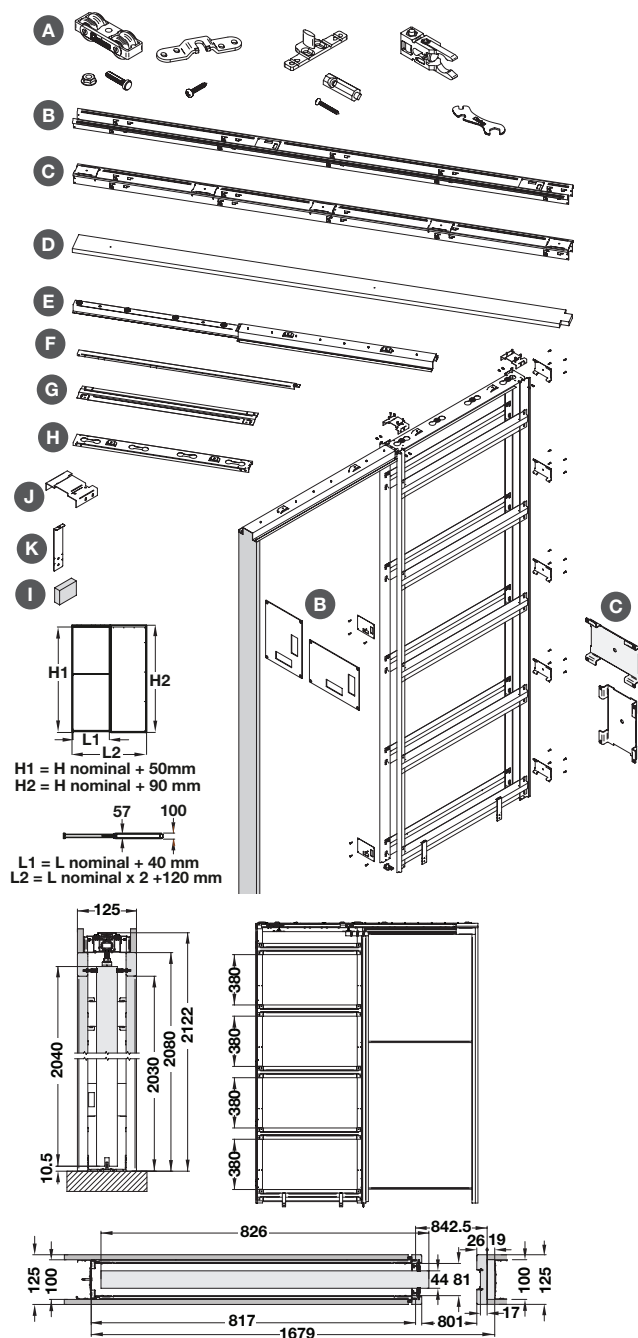

- > Optimo sliding door fitting set for 1 sliding pocket door includes:
- A Sliding gear set for 1 single door for max. 90 kg panels, includes 2x aluminium/plastic trolley hangers, 2x aluminium track stoppers, 1x plastic floor guide and fixing screws
 - B Vertical pocket rail with 2 plates, steel
 - C Vertical rear rail with 5 plates, steel
 - D Vertical wood door post, steel
 - E Top beam, steel, with track, aluminium
 - F Bracer, steel
 - G Pocket crossbar, steel
 - H Pocket header, steel
 - I Separator, thick
 - J Top track support, for 125 mm finished wall
 - K Lower fixing support
- > Order qty: 1 set

15 Year
Warranty

Fitting set	For 1 door
A Sliding gear set	1 set
B Vertical pocket entrance rail, track and plates	1 set
C Vertical rear pillar and wall plates	1 set
D Vertical wood door post	1 pc
E Top beam with track	1 pc
F Bracer	2 pcs
G Pocket crossbar	10 pcs
H Pocket header	1 pc
I Separator, thick	10 pcs
J Top track support	2 pcs
K Lower fixing support	4 pcs
Suits door height x width	
2040 x 626 mm	940.99.002
2040 x 726 mm	940.99.003
2040 x 826 mm	940.99.004
2040 x 926 mm	940.99.005
2040 x 1026 mm	940.99.006
1981 x 610 mm	940.99.007
1981 x 686 mm	940.99.008
1981 x 762 mm	940.99.009
1981 x 838 mm	940.99.010
1981 x 914 mm	940.99.011

Optimo jamb kits



Standard jamb kit



Fire rated FD30 jamb kit

- > To achieve the best finish in the installation
- > Standard jamb kits include white weather strips and rubber gaskets
- > Fire rated jamb kit is only for 125 mm finished wall, with intumescent strips and rubber gaskets included
- > MDF Fire rated jamb kit for single FD30 rated doors are fully certified to BS EN 1634 -1:2014 +A1:2018 Part 1 w
- > Only for use with 44 mm thick FD30 Timber doors (not supplied)
- > Order qty: 1 set

15 Year
Warranty

For finished wall thickness	For 1 door
100 mm, standard	940.99.012
125 mm, standard	940.99.014
125 mm, fire rated FD30	940.99.015