


HAWA JUNIOR 100 B POCKET ACOUSTICS

Door can be assembled after completion of construction. Outstanding living comfort thanks to effective exclusion of sound, drafts, odours and unwanted light incidence. Low opening forces <30 N


2

- > HAWA-Junior 100 B
- > Application: For 1-leaf sliding doors for soundproofing and thermally insulating door systems
- > Range:
 - Max. door weight **≤100 kg**
 - Fitting for top-running wooden doors up to 100 kg, with surface mounted running track or running track flush with the ceiling.
 - Door width **800-1550 mm**
 - Internal opening width: **750-1500 mm**
 - Door height: **≤2500 mm**
 - Door thickness: **44-50 mm**
 - Adjustment facility: **Height ±2 mm**
 - Easy height adjustment via both suspensions and convenient depth adjustment of the installed door in the wall pocket
- > Sound proofing value: A sound proofing value of max. 41 dB can be achieved, depending on wall and door structure
- > Installation: Wall pocket installation in combination with transom, ceiling or integrated ceiling installation: the fixing profile is installed during the construction of the wall pocket

Door width TB calculation Installation
Drawing shows left hand closing
DGB = internal opening width




Fully opening, $TB = DGB + 50 \text{ mm}$

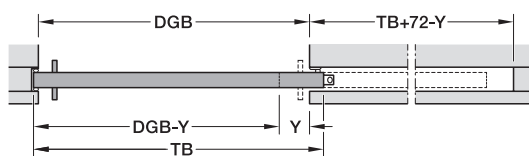

Partially opening, $TB = DGB + 50 \text{ mm}$




Installation

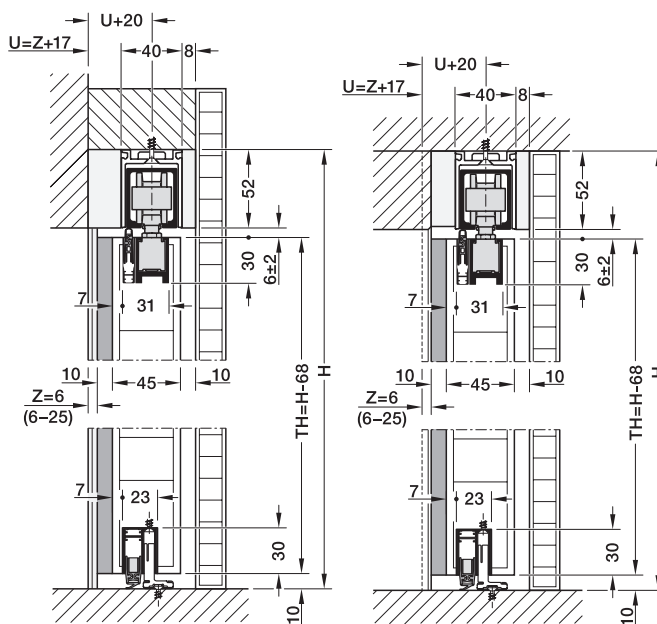


Z = frame
U = doubling provided on site
TH = door height
H = height

- ! > Gap dimension to floor: Floor gaps of 8–12 mm can be covered by the horizontal seal
- > Distance between door leaf and contact surface for vertical seal (e.g. door frame) with wall pocket installation: 10 mm
- > The use of a soft and self closing mechanism is possible on the opening side with partially opening doors (in wall pocket)

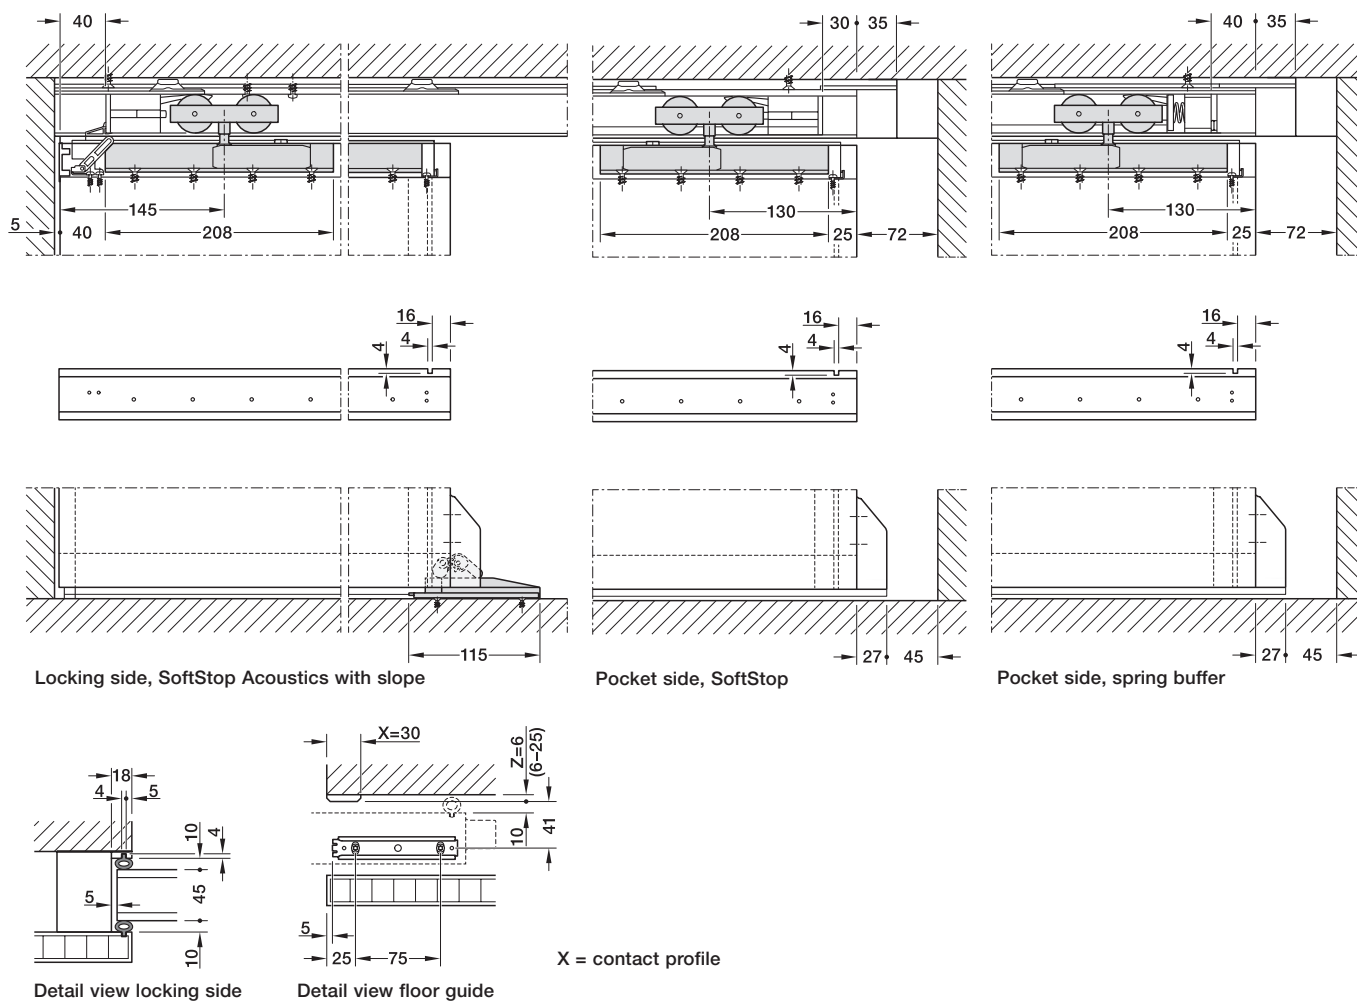


HAWA Junior 100 B Pocket Acoustics

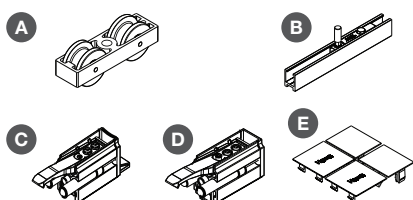

- > Fitting set for 1 door includes:
- A Running gears
- B Suspension profiles
- C SoftStop Junior 100 Acoustics
- D SoftStop Junior 80/100 with retaining spring
- E Cover cap set
- F Accessories
- > Order qty: 1 set

Item	Fitting set for 1 door
A Running gear	2 pcs
B Support profiles	2 pcs
C SoftStop Junior 100 Acoustics	1 pc
D SoftStop Junior 80/100 with retaining spring	1 pc
E Cover cap	1 set
F Accessories	1 set
Cat. No	941.04.017

HAWA-Junior 80 tracks

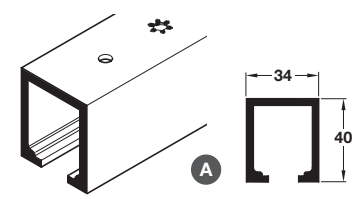


- > With screw holes for soffit fixing
- > Silver anodised aluminium
- > Order qty: 1 pc



Length	2.0 m	2.5 m	3.0 m
Cat. No.	940.80.200	940.80.250	940.80.300


HAWA-Junior 80 mounting profile



- > Mounting profile for running rail with Bayonet lock
- > Can be shortened to the respective rail length
- > Includes mounting set
- > Silver anodized aluminium
- > Order qty: 1 pc

Length	2500 mm	3000 mm
Cat. No.	940.80.421	940.80.422


HAWA Acoustics horizontal seal set

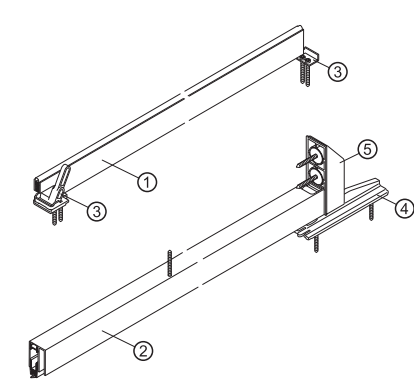

- > Fitting set for 1 door includes:
 - Header seal (1)
 - Floor seal (2)
 - Accessory set, top (3)
 - Accessory set, bottom (4)
 - Pocket adapter (5)
- > Order qty: 1 set

Size	Left	Right
XS	940.80.460	940.80.465
S	940.80.461	940.80.466
M	940.80.462	940.80.467
L	940.80.463	940.80.468
XL	940.80.464	940.80.469
XXL	940.80.103	940.80.105
XXXL	940.80.104	980.80.106

HAWA Acoustics vertical seal



- > Black silicone
- > Order qty: 1 pc

Length	7700 mm
Cat. No.	940.00.500

Selection for fully and partially opening doors

	Internal opening width mm
XS	750-780
S	850-970
M	970-1100
L	1100-1220
XL	1220-1250
XXL	1350-1470
XXXL	1470-1500