



SOFTMOVE 40 FOR HAWA-JUNIOR 40 SYSTEMS

SoftMove gently decelerates sliding doors and draws them into their final position, with no door spring-back.

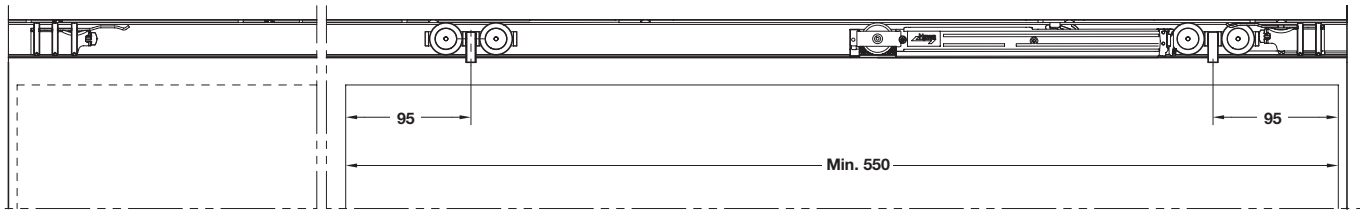

One-sided damping

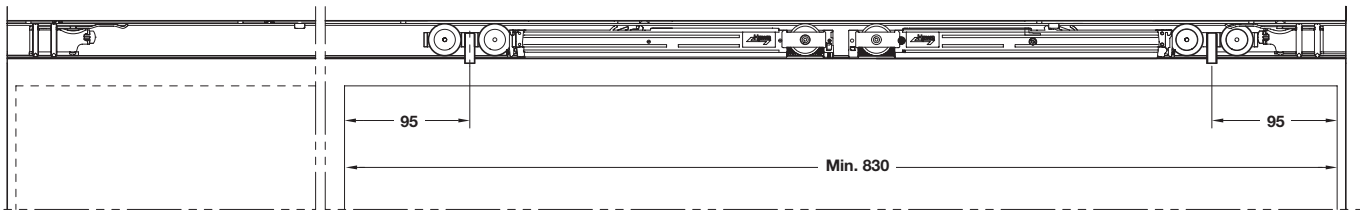


Two-sided damping

SoftMove 40 for HAWA-Junior 40



- > SoftMove gently decelerates sliding doors and draws them into their final position, with no door spring-back
- > For use with all HAWA-Junior 40 sliding door systems
- > For installation in HAWA-Junior 40 top track, screw fixes to carriage of Junior 40 trolley hanger (not included)
- > Can be installed on the opening or closing side
- > Min. door width:
 - For one-sided damping: 550 mm
 - For two-sided damping: 830 mm
- > Drilling template and fitting instructions included for precise and simple installation
- > White plastic body with Ø 14 mm hydraulic metal damper
- > Order qty: 1 pc



Cat. No.	
SoftMove 40	940.80.330



- > For use with all HAWA-Junior 40 sliding door systems:
 - HAWA-Junior 40/Z and 40/B; shown on pages **2.67**
 - HAWA-Junior 40/GL; shown on pages **2.38-39**
 - HAWA-Junior 40/GP; shown on pages **2.40-41**