

HAWA PORTA 60/100 HMD **POCKET**

Outstanding living comfort thanks to effective exclusion of sound, drafts, odors and unwanted light incidence. Aluminium cadding or wooden cladding that is provided on site is integrated in the system. Low opening forces <30 N

- > HAWA Porta 60/100 HMD **Pocket**
- > Application: For 1-leaf sliding doors, for soundproofing and thermally insulating door systems
- > Range:
 - Max. door weight **100 kg**
 - Door width **820-1430 mm**
 - Internal opening width: **820-1680 mm**
 - Door height: **≤2500 mm**
 - Door thickness: **39-45 mm**
 - Adjustment facility: Height **±2 mm**
- > Sound proofing value: A sound proofing value of max. 34 dB can be achieved, depending on wall and door structure
- > Installation: Wall mounting


Door width TB calculation

Drawing shows left hand closing


X = frame dim. (30–60 mm), DGB = internal opening width




Fully opening, $TB = DGB + X + 120 \text{ mm}$

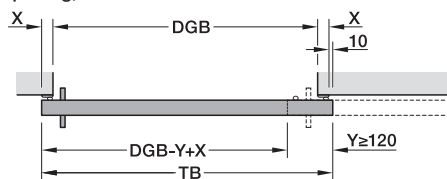


Partially opening, $TB = DGB + 2X + 10 \text{ mm}$

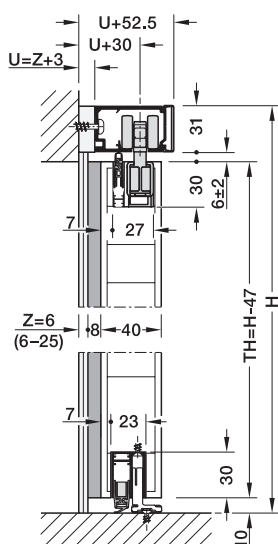Installation



Contact profile for vertical seal

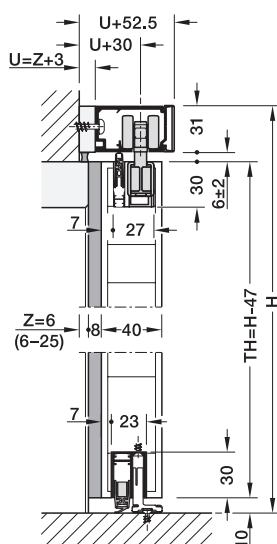

Block frame

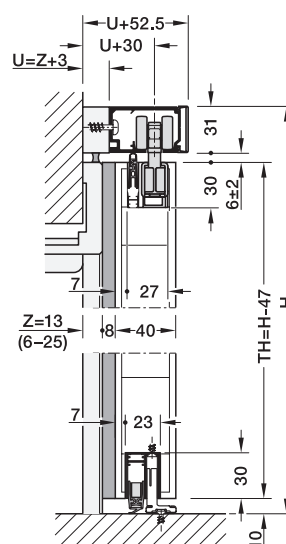

Closed frame

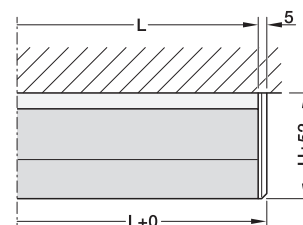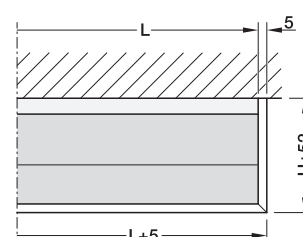Panel calculation**Clip panel****Wooden panel**

Z = frame
U = doubling provided on site
TH = door height
H = height




Tracks and acoustics sets must be ordered separately, shown on page 2.78




- > Contact surface for vertical seal must be provided on site (min. 6 mm offset to wall construction) e.g. by block frame or closed frame
- > Distance between door leaf and contact surface for vertical seal (e.g. door frame) with wall mounting: 8 mm
- > Existing skirting on site may collide with the vertical seal, use doubling elements, if necessary
- > Gap dimension to floor: Floor gaps of 8–12 mm can be covered by the horizontal seal
- > The use of a soft and self closing mechanism is possible on the opening side with partially opening door



Fully opening door

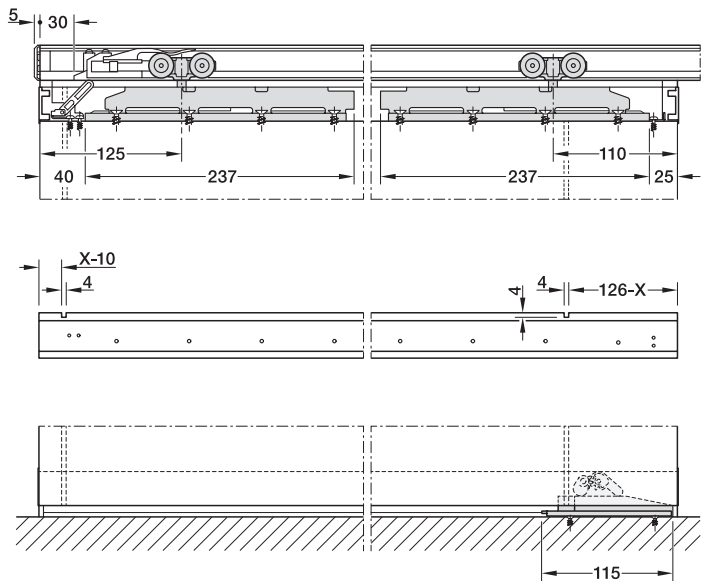


Partially opening door

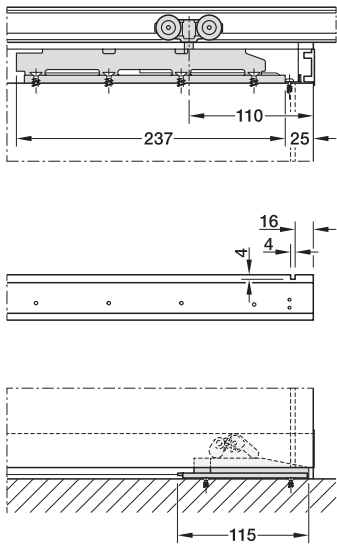


Floor guide installation

X = frame dim./contact profile

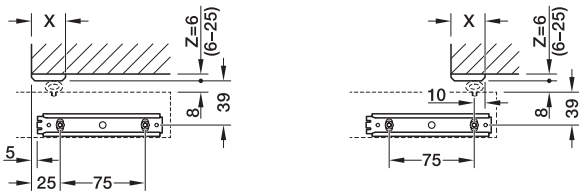

HAWA Porta 60/100 HMD Pocket

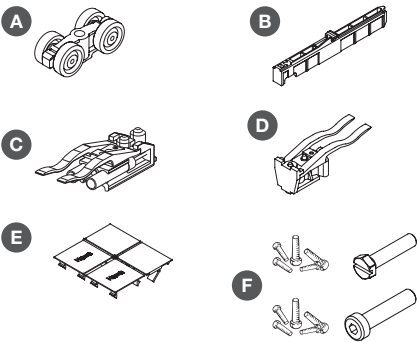

- > Fitting set for 1 door includes:
 - A Running gears
 - B Support profiles with suspension carriage
 - C SoftStop Porta 100
 - D Stopper with retaining spring
 - E Cover cap set
 - F Accessories
- > Order qty: 1 set

Item	Door weight	
	≤60 kg	≤100 kg
A Running gear	2 pcs	2 pcs
B Support profiles	2 pcs	2 pcs
C SoftStop Porta 60/100	1 pc	1 pc
D Stopper with retaining spring	1 pc	1 pc
E Cover cap	1 set	1 set
F Accessories	1 set	1 set
Cat. No	940.60.076	940.60.077



Tracks and acoustics sets must be ordered separately, shown on page 2.78