

STRAIGHTAWAY 700 BOTTOM ROLLING SYSTEM


Stainless steel corrosion resisting system, for internal or external applications, single or multiple runs of track. Ideal for sliding double glazed doors.

3


Moveable Room Systems: Sliding Exterior Doors



- > Straightaway 700
- > Produced in 316 grade stainless steel and developed to cope with harsh operating environments, Straightaway 700 is ideal for applications in the food and chemical industries and in areas of extreme climatic conditions as well as hotels, hospitals etc.
- > Range:
 - Max. door weight **115 kg**
 - Max. door height **2.4 m**
- > Recommended door construction:
 - Door thickness **30-60 mm**
 - Width one third height minimum
 - Handle height just over half way from bottom for best results
 - The sliding panel when fully open should project a minimum of 65 mm to avoid fingers becoming trapped between handle and fixed panel
 - Bottom rail should be sufficient depth to house roller casing
- > Fixing:
 - Top guide tracks soffit fixed
 - Floor tracks may be recessed
 - Mortice for bottom rollers must fit tight around casing, so that weight of door is carried on top of roller casing above wheel

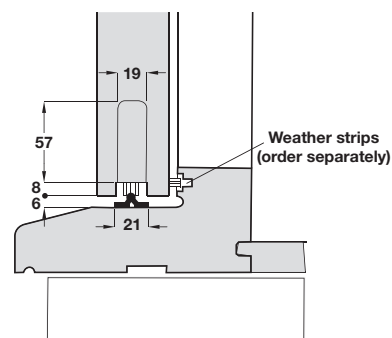


Top safety guide channel



- > Pre-drilled for countersunk screws
- > Galvanized steel to BS EN 10142
- > Order qty: 1 pc

Length	Cat. No.
2.1 m	941.80.821
3.0 m	941.80.830


Top roller guide



- > Stagger top fixing position to obtain correct tension
- > Where high wind pressure consider one extra top guide
- > Nylon roller Ø 40 mm, steel plate 5 x 30 x 130 mm
- > Order qty: 1 pc (2 or 3 pcs required per panel)

	Cat. No.
Top roller guide	941.80.030


Track stopper

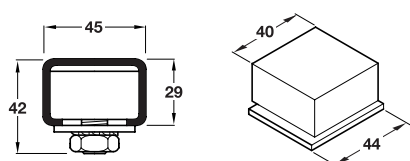

- > Rubber stop block with steel clamp plate, washer and nut
- > Order qty: 1 pc (2 pcs required per panel)

	Cat. No.
Track stopper	941.80.041


Bottom roller



- > For maximum door weight 115 kg
- > Height (without roller) x depth x width: 57 x 19 x 134 mm
- > Stainless steel casing with nylon wheel, needle bearings
- > Order qty: 1 pair

	Cat. No.
Bottom roller	943.26.012

Bottom track, 10 x 21 mm



- > Pre-drilled for countersunk screws
- > Stainless steel
- > Order qty: 1 pc

Length	Cat. No.
2.1 m	941.80.621
3.0 m	941.80.630