


SLIDO W-FOLD32 100T FOLDING WALL SYSTEM

For flexible room partitioning and screens. One fitting for corner and centre suspension.

3

- > Slido W-Fold32 100T
- > Range:
 - Max. door weight **100 kg**
 - Max. door height **3500 mm**
 - Door width **500 - 1000 mm**
 - For door thickness **35 to 60 mm**
 - Internal opening width:
 - 1-sided system **6 m**, 2-sided system **12 m**
 - Adjustment facility, height **±5 mm**

Installation dimensions

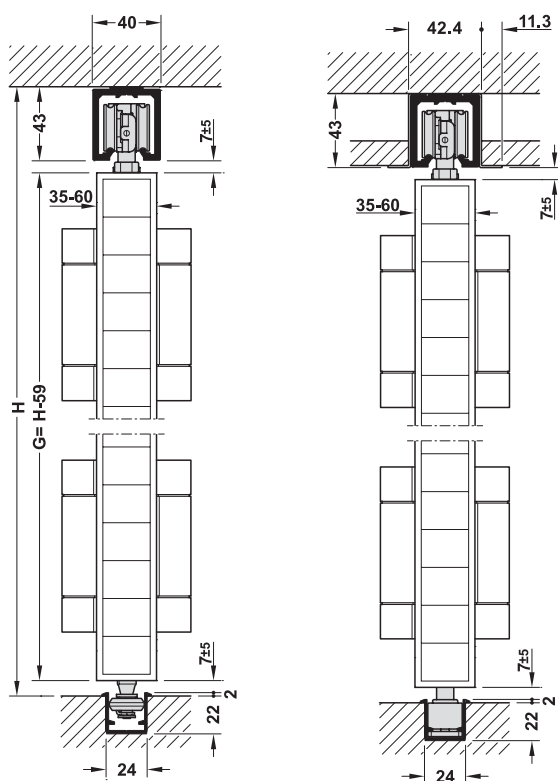

Installation beneath the ceiling
with floor guide

Installation with suspended ceiling
with floor spring

- ! > Please see installation instructions for exact calculation of door width and required door preparation details
- > Number of flange hinges depends on the door height
- > The corner suspension version of Slido-Fold systems always requires bottom guide tracks. Only systems with max. 2 doors on both sides are an exception. These systems do not necessarily require bottom guide tracks. Installation without (standard) or with bottom track is optional with centre suspension version

- ➔ > Also available for glass; please contact our Estimating Team for further information
- > Tel: **0800 171 2907** or e-mail **estimating@hafele.co.uk**




Corner suspension




Centre suspension

Calculation of door width

Corner suspension

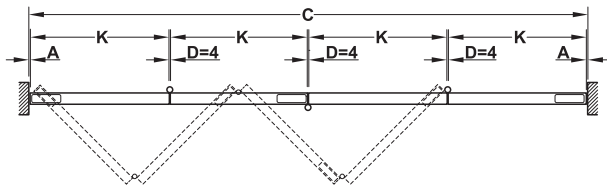

$$K = (C - A - D - D - D - A) / 4$$

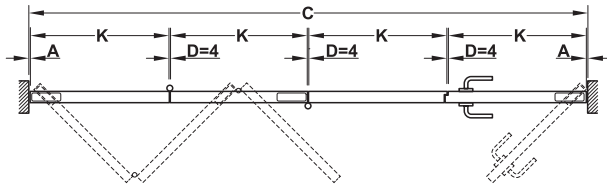

$$K = (C - A - D - D - D - A) / 4$$

A = wall distance between wall and door edge


C = total system width

D = gap dimension


K = door width

Note: Other processing dimensions and further details can be found in the installation instructions.

Centre suspension

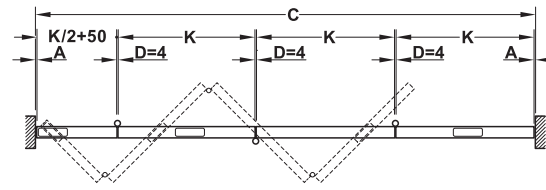


$$K = (C - A - 50 - D - D - D - A) / 3.5$$

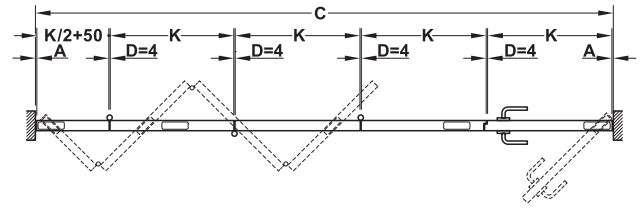

$$K = (C - A - 50 - D - D - D - A) / 4.5$$

Wall connection with folding panels

Corner suspension

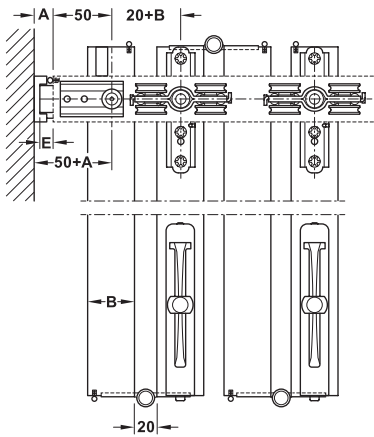

A = wall distance between wall and door edge


B = door thickness

E = opening width rotating range

B	35–44 mm	45–54 mm	55–60 mm
E	5 mm	7 mm	9 mm


Note: Other wall connection options can be found in the installation instructions.

Centre suspension

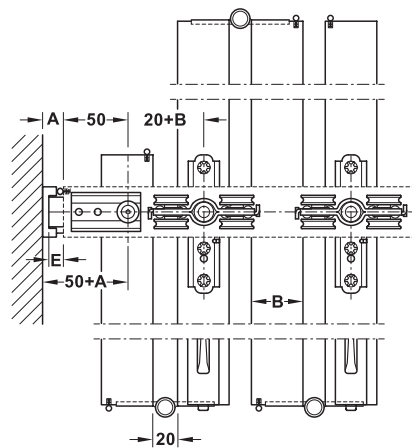


Position and type of locks


Corner suspension

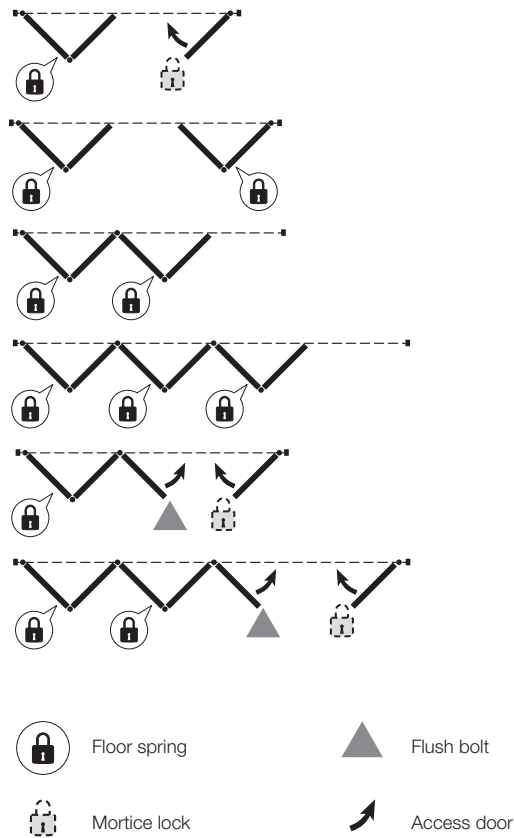

Centre suspension

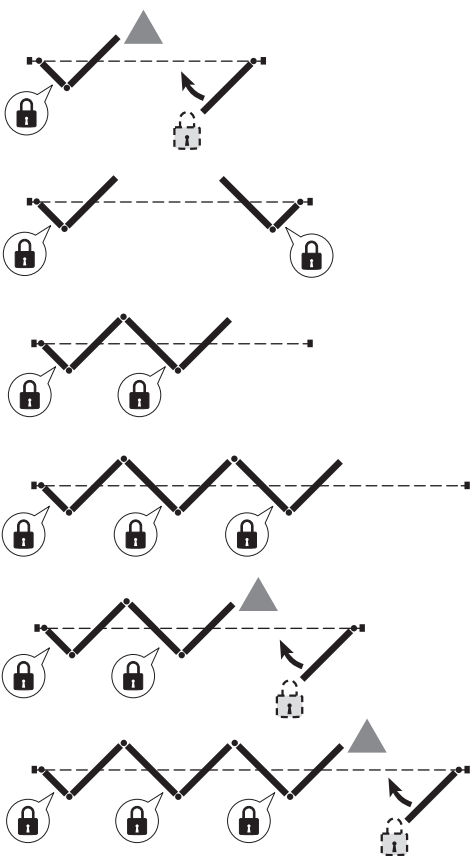

Slido W-Fold32 100T tracks, channels and profiles

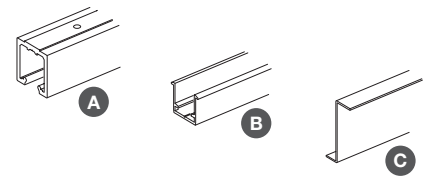

- > Tracks must be ordered separately
 - A Top track, silver coloured anodised aluminium
 - B Guide track, silver coloured anodised aluminium
 - C Supporting/fascia bracket, silver coloured anodised aluminium
- > Order qty: 1 pc




Item	3.0 m
A Top track	943.55.041
B Guide track	943.55.051
C Supporting/fascia bracket	943.55.061

Slido W-Fold32 100T fitting sets

For systems with bottom track

Corner suspension



Basic set



Additional set



Set for access door for folding wall



Set for access door

Centre suspension



Basic set



Additional set




Set for access door for folding wall



Set for access door

For systems without bottom track

Corner suspension



Basic set



Set for access door

Centre suspension



Basic set



Additional set




Set for access door

> Fitting sets include:

- D Running gear, steel
- E Pivot bearings (1 each top/bottom)
- F Guide
- G Centering set for door
- HSet of locking components for flush bolt

> Fixing materials included

> Order qty: 1 set

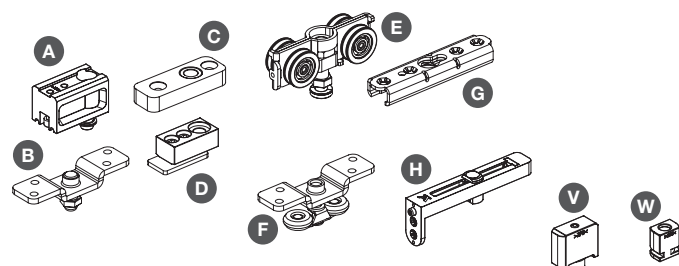

> Please order running tracks, guide tracks, hinges and accessories separately; Running tracks and guide tracks, shown on page 3.30


> Accessories, shown below

> Hinges, shown on pages 2.95



Set	Fittings included										Cat. No.
	A	B	C	D	E	F	G	H	V	W	
Fitting sets for systems with bottom track											
Basic set	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	-	-	943.55.000
Additional set	-	-	-	-	1 pc	1 pc	1 pc	1 pc	-	-	943.55.002
Set for access door for folding wall	-	-	-	-	-	-	-	-	1 pc	1 pc	943.55.003
Set for access door	1 pc	1 pc	1 pc	1 pc	-	-	-	-	1 pc	1 pc	943.55.004
Fitting sets for systems without bottom track											
Basic set	1 pc	1 pc	1 pc	-	1 pc	-	1 pc	1 pc	-	-	943.55.001
Additional set	-	-	-	-	1 pc	-	1 pc	1 pc	-	-	943.55.006
Set for access door	1 pc	1 pc	1 pc	-	-	-	-	-	1 pc	-	943.55.005

Slido W-Fold32 100T components

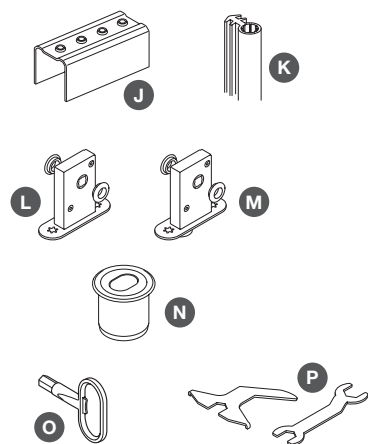

- > J Connection piece, galvanized steel
- > K DS 9608 rebate seal, 25 m white or black silicone
- > L Floor lock with rosette and floor socket, for systems without bottom track, galvanized steel
- > M Floor lock with rosette, for systems with bottom track, galvanized steel
- > N Floor socket, silver coloured anodised aluminium
- > O Hexagon socket key, galvanized steel
- > P Disassembly set, galvanized steel
- > Order qty: 1 pc



Item	Cat. No.
J Connection piece	943.55.080
K DS 9608 rebate seal, white	950.09.487
K DS 9608 rebate seal, black	950.09.483
L Floor lock with rosette and floor socket	943.55.070
M Floor lock with rosette	943.55.071
N Floor socket	943.55.073
O Hexagon socket key	943.55.072
P Disassembly set	943.55.074