


HAWA-CENTERFOLD 80/H FOLDING DOOR SYSTEM

For heavy centre-fold walls for residential or commercial applications. A pivot bearing secures the first panel in the set; the others attach by means of stainless steel hinges that bring the panels closer together and minimise panel stacking requirements.


- > HAWA-Centerfold 80/H
- > Range:
 - Minimum door thickness **35-45 mm**
 - Maximum door panel weight **80 kg**
 - Maximum panel width **900 mm**
 - Minimum panel width **500 mm**
 - Maximum panel height **3.5 m**
- > Vertical adjustment **± 3 mm**
- > Left and right hand, inwards or outwards opening installations all use the same components
- > A communicating pivot door can be added to the panel stack, or the opposing end
- > Light and quite running
- > Panel stack stores compactly
- > Installation drawing reference 19587



- > Tracks must be ordered separately, shown on page **3.33**
- > Hinges need to be ordered separately, shown on page **3.35**
- > Ordering guide shown on page **3.35**

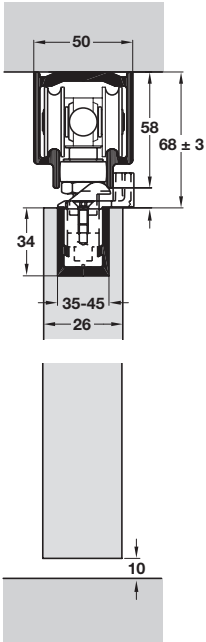

HAWA Centerfold 80H fitting sets

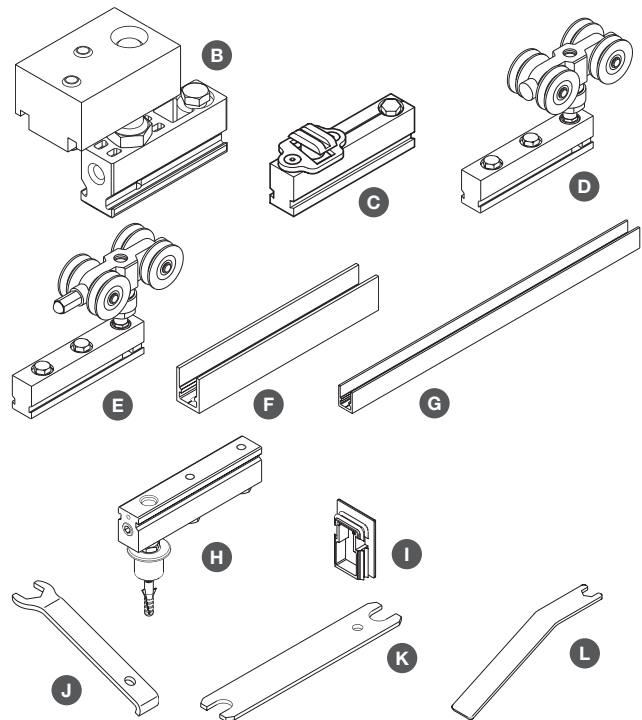


- > Fitting sets for HAWA-Centerfold 80/H:
 - Set 1 - Basic set with pivot bearing, without guide
 - Set 2 - Additional set without guide
 - Set 3 - Pivot door set to folded stack, without trolley and top pivot bearing
 - Set 4 - Single pivot door set for installation without bottom guide channel
- > Fitting sets consist of:
 - B Top pivot bearing
 - C Stop with adjustable retainer
 - D Trolley hanger. M10 plastic-tyred wheels and suspension plate
 - E Trolley hanger. M10 plastic-tyred wheels and suspension plate and spacer
 - F Suspension profile 208 mm. Pre drilled for countersunk screws. Anodised aluminium
 - G Suspension profile 550 mm. Pre drilled for countersunk screws. Anodised aluminium
 - H Thrust bearing sleeve, D=20 mm, including driver
 - I Cover cap. Anthracite grey plastic
 - J Vertical adjustment key
 - K Suspension assembly locking wrench
 - L Fork spanner
- > Order qty: 1 pc (2.5 or 3.5 m length)

Set	Fittings included in HAWA-Centerfold 80H fitting sets											Cat. No.
	B	C	D	E	F	G	H	I	J	K	L	
Set 1	1 pc	1 pc	1 pc	-	2 pcs	1 pc	1 pc	3 pcs	1 pc	1 pc	1 pc	943.27.100
Set 2	-	1 pc	-	1 pc	-	1 pc	-	1 pc	-	-	-	943.27.101
Set 3	-	1 pc	-	-	1 pc	-	-	1 pc	-	-	-	943.29.013
Set 4	1 pc	1 pc	-	-	3 pcs	-	1 pc	3 pcs	-	-	-	943.29.015 



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

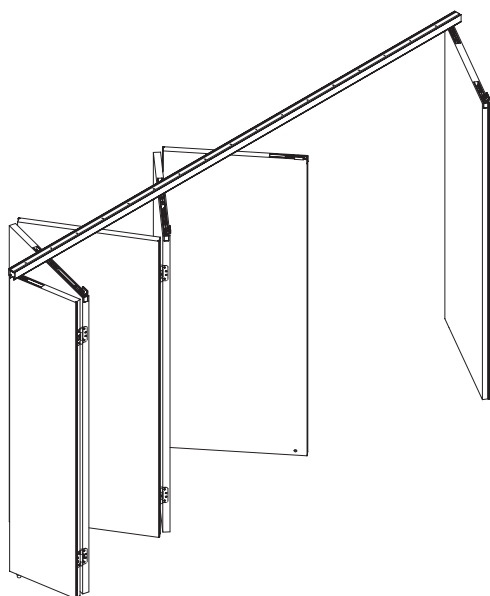


HAWA-Centerfold 80/H - Guideline to specifying sets

Configuration	Sets required	
✓	1 and a half doors	943.27.100
✓\	2 and a half doors	943.27.100 + 943.29.013
✓\✓	3 and a half doors	943.27.100 + 943.27.101
✓\✓\	4 and a half doors	943.27.100 + 943.27.101 + 943.29.013
✓\✓	1 and a half + 1 and a half doors	943.27.100 x 2 sets
✓ /	1 and a half + 1 door	943.27.100 + 943.29.015

Top track and hinges not included


Seal



- > Hollow cross-section seal strip, eliminates the problem of light penetrating through gaps between panels
- > Black
- > Order qty: 1 roll

Length	10 m
Cat. No.	950.08.300


Concealed deadbolt lock and accessories

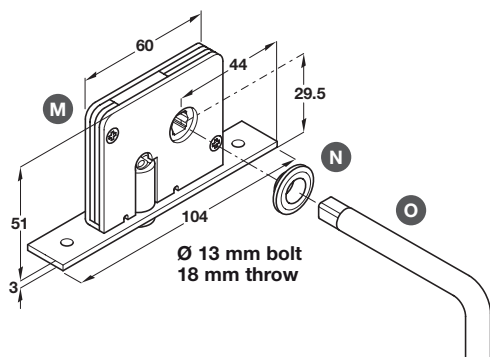

- > M Concealed deadbolt lock, medium duty, Ø 13 mm bolt, 18 mm throw, galvanized steel
- > N Lock access sleeve, nickel-plated brass
- > O Allen key, for deadbolt lock
- > Order qty: 1 pc

Item	Cat. No.
M Concealed deadbolt lock	407.49.924
N Lock access sleeve	407.49.184
O Allen key	407.49.193

Butt hinges

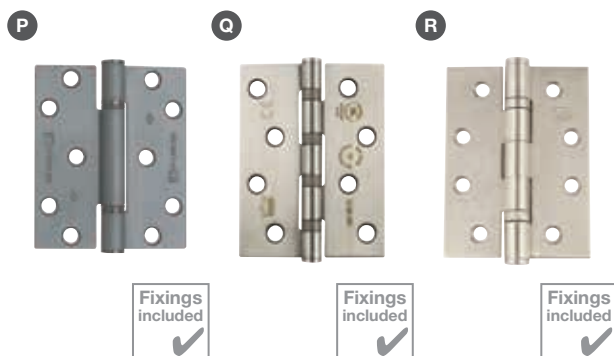

- > P HI-LOAD stainless steel 3 knuckle butt hinge, 100 x 86 mm, maintenance free carbon steel/bronze flanged bushes, Certifire CF209 approved for fire doors up to 1 hour, grade 12 BS EN 1935, grade 304 stainless steel
- > Q Phoenix Slimline stainless steel butt hinge, 102 x 76 mm, Ø 10 mm knuckle, five knuckle hinge with hardened steel thrust washers, grade 13 BS EN 1935, grade 304 stainless steel
- > R Stainless steel ball bearing butt hinge, 102 x 76 mm, Ø 14 mm knuckle, two high quality ball bearing race joints, grade 13 BS EN 1935, grade 201 stainless steel
- > Order qty: 1 pc

Item	Finish	Cat. No.
P	Satin stainless steel	926.88.010
Q	Satin stainless steel	921.08.140
R	Satin stainless steel	926.90.390



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.