


SF-A84 FOLDING DOOR SYSTEM


Good quality simple to install system for timber folding door panels, up to four each side. This low headroom system also offers the option to mount the track in the ceiling to cover the full opening.

- > SF-A84
- > Range:
 - Max. door weight: **80 kg** for 2 doors, **30 kg** other sets
 - Max. door height: **2500 mm**
 - Max. door width: **1000 mm** for 2 doors, **750 mm** other sets
 - For door thickness **35-55 mm**
- > 1000 mm panels can be installed without a bottom channel on 2 doors only folding to one side




SF-A84 - Guideline to specifying sets		
Configuration		Sets required
	Option 1: 3 doors with bottom channel	1x 943.03.000, 1x 943.03.603, 1x 943.03.803, 1x 943.52.201, 1x flush bolt, and handles
	Option 2: 3 (2+1) doors no bottom channel	1x 943.03.000, 1x 943.03.603, 1x 943.03.001, 3x 926.90.390, 1x flush bolt, and handles
	Option 3: 4 (3+1) doors with bottom channel	1x 943.03.000, 1x 943.03.603, 1x 943.03.803, 1x 943.52.201, 1x 943.03.001, 2x flush bolts, and handles
	Option 4: 5 (3+2) doors with bottom channel	2x 943.03.000, 2x 943.03.602, 2x 943.52.201, 2x 943.03.803, 2x flush bolts, and handles
	Option 5: 6 (3+3) doors with bottom channel	2x 943.03.000, 1x 943.03.603, 1x 943.03.603, 2x 943.03.803, 2x 943.52.201, 3x flush bolts, and handles
	Option 6: 4 doors with bottom channel	1x 943.03.000, 1x 943.03.002, 1x 943.03.603, 1x 943.03.803, 2x 943.52.201, 2x flush bolts, and handles
	Option 7: 5 (4+1) doors with bottom channel	1x 943.03.000, 1x 943.03.002, 2x 943.03.602, 2x 943.03.803, 2x 943.52.201, 1x 943.03.001, 2x flush bolts, and handles
	Option 8: 6 (4+2) doors with bottom channel	2x 943.03.000, 1x 943.03.002, 1x 943.03.602, 1x 943.03.603, 2x 943.03.803, 3x 943.52.201, 12x 926.90.390, 3x flush bolts, and handles
	Option 9: 7 (4+3) doors with bottom channel	2x 943.03.000, 1x 943.03.002, 2x 943.03.603, 2x 943.03.803, 3x 943.52.201, 3x flush bolts, and handles
	Option 10: 8 (4+4) doors with bottom channel	2x 943.03.000, 2x 943.03.002, 2x 943.03.603, 2x 943.03.803, 4x 943.52.201, 4x flush bolts, and handles

 Guidelines shown in table left suggest use of standard top track A (943.03.602/603) but ceiling option is available if required - track B shown below

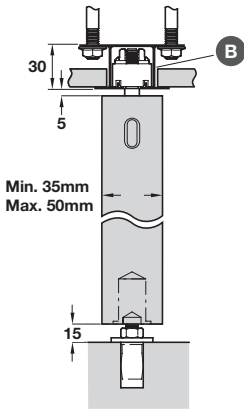

-  > Tracks, fitting sets and hinges, shown below and on page 3.37, must be ordered separately
- > Flush bolts and handles, shown on page 2.95 must also be ordered separately
- > Locks, if required, are shown on pages 2.94


SF-A84 top tracks



- > A Single top track, undrilled, satin anodised aluminium
- > Order qty: 1 pc

Item	2.0 m	3.0 m
A Single top track	943.03.602	943.03.603

SF-A84 fitting sets

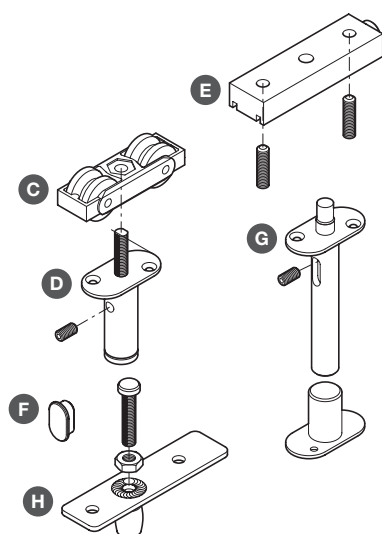


- > Fitting sets include:
- C Trolley hanger, galvanized steel
- D Fixing plate, galvanized steel
- E Track stopper, galvanized steel
- F End cap, for access to adjustment on D and G, galvanized steel
- G Top pivot, galvanized steel
- H Bottom pivot, galvanized steel
- > Order qty: 1 set

Item	For 1 pair of panels	For additional pair of panels	For swing door
C Trolley hanger	1 pc	1 pc	-
D Fixing plate	1 pc	1 pc	-
E Track stopper	1 pc	-	1 pc
F End cap	2 pcs	-	1 pc
G Top pivot	1 pc	-	1 pc
H Bottom pivot	1 pc	-	1 pc
Cat. No.	943.03.000	943.03.002	943.03.001

YOU ALSO NEED:



SF-A84 bottom guide and channel

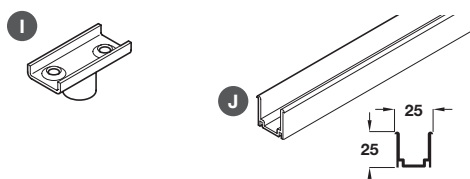

- > I Bottom guide, for recess mounting into bottom edge of door, screw fixing, steel/plastic
- > J Bottom channel, 3.0 m, screw fixing, satin anodised aluminium

Item	Cat. No.
I Bottom guide roller, recess mounting	943.52.200
J Bottom guide channel	943.03.803