


IXCONNECT MINIFIX INDUSTRY BOLTS

- > Minifix connecting bolts **A** and **B**:
Can be screwed directly into a $\varnothing 5$ mm pre-drilled hole
For double-sided constructions
- > Minifix connecting bolts **C**:
With M6 thread are used in conjunction with sleeves or dowels for installation in $\varnothing 8$ mm or $\varnothing 10$ mm pre-drilled holes
For single-sided constructions




Cross slot
Tighten with PZ2 screwdriver only (cross slot size 2)

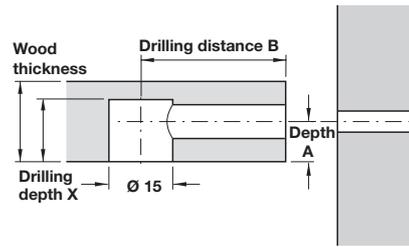

Combination slot
Tighten with PZ2 screwdriver or flat bladed screwdriver


Minifix M100 connecting bolt



- > For direct, screw-in installation in $\varnothing 5$ mm holes
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs

| | | |
|---------------------|------------|------------|
| Drilling distance B | 24 mm | 34 mm |
| Bright | 262.27.611 | 262.28.611 |
| Galvanized | 262.27.618 | 262.28.618 |


Minifix M200 connecting bolt



- > For direct, screw-in installation in $\varnothing 5$ mm holes
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs

| | | |
|---------------------|------------|------------|
| Drilling distance B | 24 mm | 34 mm |
| Galvanized | 262.27.627 | 262.28.624 |

Minifix M200 connecting bolt



- > With M6 thread, for screwing into sleeves or dowels for installation in $\varnothing 8$ mm or $\varnothing 10$ mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



> Screw in sleeves and dowels with M6 internal thread are shown on page **420**

| | |
|---------------------|------------|
| Drilling distance B | 34 mm |
| Galvanized | 262.28.642 |