


MINIFIX GV MITRE JOINT CONNECTORS

ixconnect

- > Connectors to secure mitre-jointed cabinet and profiles without the need for gluing
- > Combine knock-down convenience with extreme stability on assembly
- > These connectors should preferably be used only in combination with Minifix 15 zinc alloy housings shown on pages **294-295**




Minifix GV mitre joint connector



- > With nylon sleeve with harpoon thread, press-fits into Ø 8 mm holes
- > For one-sided installation in Ø 7 mm bolt holes
- > For mitre angles from 90° to 180°
- > Steel
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	44 mm
Galvanized	262.12.822	262.12.804

Minifix GV mitre joint connector





- > With M6 thread, for screwing into sleeves or dowels, for installation in Ø 8 mm or Ø 10 mm holes
- > For one-sided installation in Ø 7 mm bolt holes
- > For mitre angles from 90° to 180°
- > Steel
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	44 mm
Galvanized	262.12.840	262.12.984

> Screw in sleeves and dowels with M6 internal thread are shown on page **420**

Minifix GV mitre joint connector

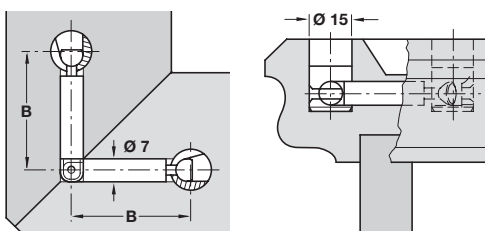

- > Double-ended hinged bolt for installation in Ø 7 mm holes
- > For double-sided installations
- > For mitre angles from 90° to 180°
- > Steel
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	44 mm
Galvanized	262.12.859	262.12.939

COMPONENTS, FIXINGS AND CONSUMABLES 2014, © Häfele U.K. Ltd 2014. Dimensional data not binding. We reserve the right to alter specifications without notice.