



IXCONNECT MAXIFIX UNIVERSAL CONNECTORS

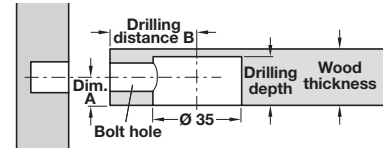


For minimum board thickness of 24 mm.

- > Individual connector to drill in for very strong connections with a high load capacity of wooden components
- > Wide range of applications - e.g. as a worktop connector with double-ended bolt
- > Long tightening distance and rapid tightening with an allen key SW6 or cross slot PZ 3
- > Can be tightened using an electric screw driver (bit allen key SW6 or cross slot PZ3)



- Bolt hole** = \varnothing 10 mm
- Drilling depth** = 1/2 wood thickness + 7.5 mm^{0.5}
- Distance A** = 1/2 wood thickness
- Drilling distance B** = optional between B 35 (35 mm) or B 55 (55 mm), drilling distance from housing centre to panel front edge


Maxifix housing



- > Wide range of applications
- > For wood thickness from 24 mm
- > Drilling depth: 1/2 wood thickness + 7.5 mm
- > Zinc alloy
- > Order qty: 1 pc

Finish	SW 6	PZ 3
Bright	262.86.003	262.86.013
Nickel-plated	262.86.703	262.86.713


Maxifix cover cap



- > For Maxifix housing
- > Plastic
- > Order qty: Multiples of 100 pcs

Finish	Cat. No.
Fawn coloured (RAL 8007)	262.86.190
Black (RAL 9005)	262.86.390
White (RAL 9010)	262.86.790

Maxifix connecting bolt



- > Screws into M6 or M8 sleeve
- > Zinc-plated steel
- > Order qty: Multiples of 100 pcs



> Screw in sleeves and dowels with M6/M8 internal thread are shown on pages **420-421**

Drilling distance B	35 mm	55 mm
M6 thread	262.86.901	262.86.902
M8 thread	262.86.911	262.86.912



> Red jig for Maxifix housings are shown on **321-324**
 > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **322**

COMPONENTS, FIXINGS AND CONSUMABLES 2014, © Häfele U.K. Ltd 2014. Dimensional data not binding. We reserve the right to alter specifications without notice.