



WINDOW FRAME SCREWS


Universal application with all frame materials and types of walls.

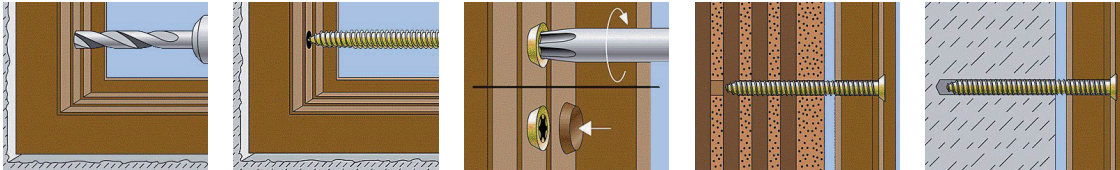


Window frame screw



With cylinder head TS 30




With countersunk head TS 30

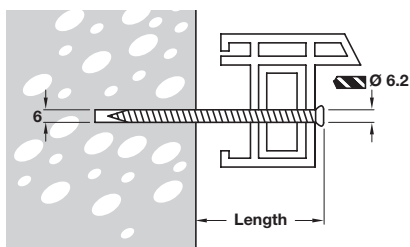

- > With cylinder head TS30 or countersunk head TS30
- > Advantages:
 - Simple, time-saving fitting with permanent and tension free gap
 - High strength combined with a small drill-hole diameter
 - Universal application with all frame materials and types of walls
- > Suitable for: Concrete, solid bricks, solid sand-lime bricks, vertically perforated bricks, perforated sand-lime bricks, solid pumice bricks, foam mortar (gas concrete) and stone
- > Galvanized steel with low friction coating
- > Order qty: Multiples of 100 pcs

Type	Length	Cylinder head	Countersunk head
7.5 x 72	72 mm	051.50.901	051.46.901
7.5 x 92	92 mm	051.50.902	051.46.902
7.5 x 112	112 mm	051.50.903	051.46.903
7.5 x 132	132 mm	051.50.904	051.46.904
7.5 x 152	152 mm	-	051.46.905
7.5 x 182	182 mm	051.50.906	051.46.906

Cover cap, Ø 16 mm




- > For window frame screws with countersunk head
- > Plastic
- > Order qty: Multiples of 100 pcs



Colour	Cat. No.
White	051.46.090

ANCHOR BOLTS

Firm anchoring with just a few turns.

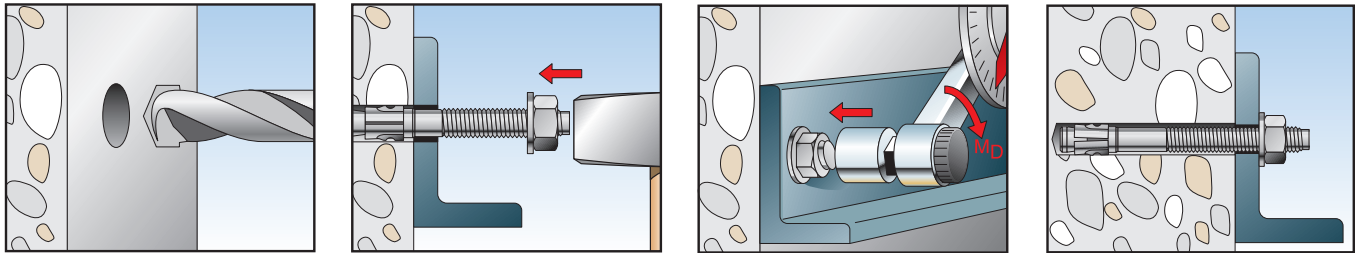

Fischer FBN anchor bolt for pressure zones

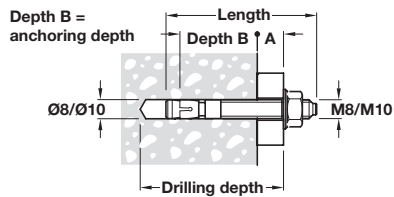

- > With M8 or M10 thread
- > Drive: 13/17 mm spanner
- > Advantages:
 - Even more possibilities with variable fixing thickness and longer thread
 - Optimised expansion clip allows even better holding strength, even in lower quality concrete
 - Firm anchoring with just a few turns
 - Highly economical
- > Suitable for: Concrete \geq B15, dense stone
- > Galvanized steel

FBN Type	Length	Min. drilling depth	Depth B	Thickness A	Cat. No.	Order qty
M8 thread, Ø 8 mm drill hole						
8/5	58 mm	55 mm	35 mm	5 mm	051.66.006	100 pcs
8/10+23	76 mm	73 mm	48/35 mm	10/23 mm	051.66.007	50 pcs
8/30+43	96 mm	93 mm	48/35 mm	30/43 mm	051.66.008	50 pcs
8/50+63	116 mm	113 mm	48/35 mm	50/63 mm	051.66.009	50 pcs
M10 thread, Ø 10 mm drill hole						
10/5	69 mm	65 mm	42 mm	5 mm	051.66.011	50 pcs
10/50+58	124 mm	118 mm	50/42 mm	50/58 mm	051.66.014	20 pcs
10/100+108	174 mm	168 mm	50/42 mm	100/108 mm	051.66.015	20 pcs