





CONCEALED CABINET HANGERS AND FITTINGS

These cabinet hangers are concealed behind the rear panel leaving only the cover caps visible within the wall unit.

Concealed cabinet hanger, dowel/screw mounting

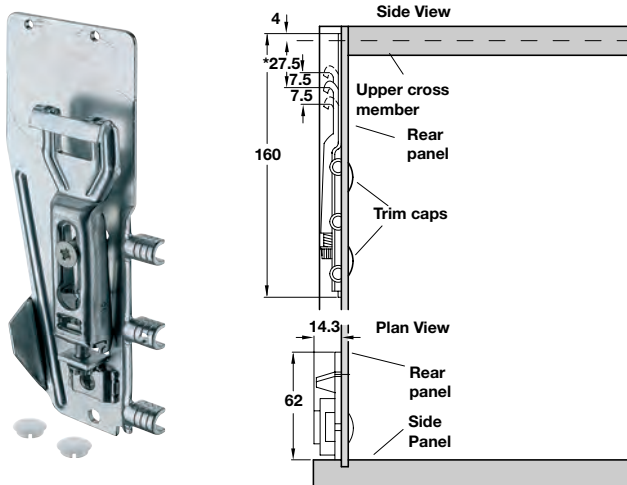

*Distance 27.5 which is the mean distance between the mounting holes and the underside of the mounting bracket hook distance for the upper edge of the rail/hook

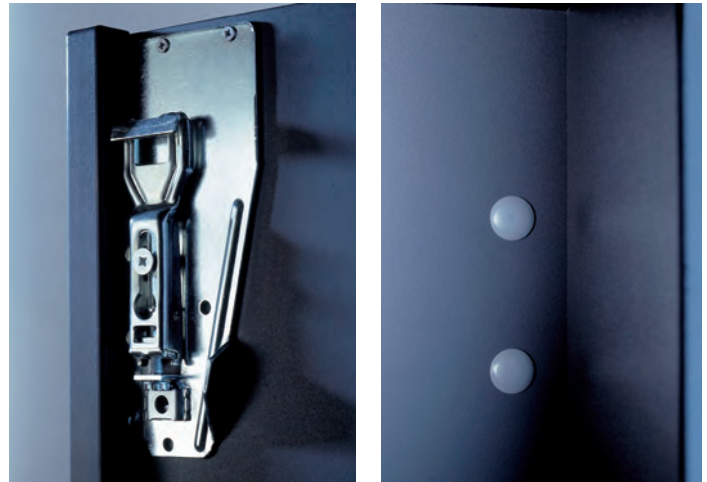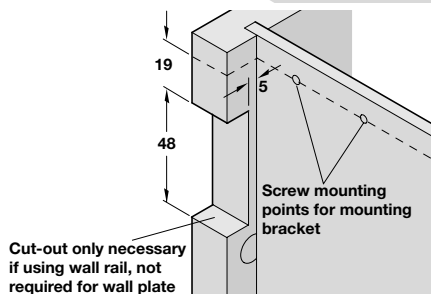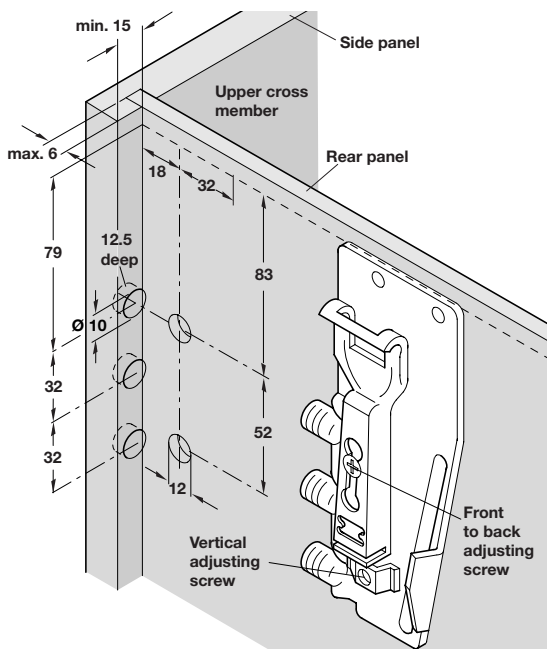

- > Dowel mounting to side panel and screw mounting to rear panel
- > Handed
- > Cabinet hanger concealed behind rear panel, only cover caps visible inside the cabinet
- > Vertical and depth adjustment possible through Ø 12 mm holes in rear panel, using adjusting screws
- > Three-way adjustment:
 - Vertical adjustment: 15 mm
 - Depth adjustment: 20 mm
 - Lateral adjustment: with hooks approx. 8 mm, as required with wall plate or rail
- > Load carrying capacity 130 kg per pair
- > Galvanized steel with RAL 9010 white plastic cover caps
- > Order qty: 1 pc (order 1 left and 1 right handed pc)



> Wall rail must be ordered separately, Cat. No. 290.10.900, shown on page 78



> For safety reasons, the cabinet hangers must be fitted in the upper third of the cabinet

Handed
Cat. No.

Left
290.03.911

Right
290.03.910